



XCMG BRIEFING

Founded in 1943, XCMG is the largest enterprise in the Chinese construction machinery industry. We offer the most diverse product line and the highest technological standards. We provide a comprehensive set of construction solutions, and we are the most internationally competitive firm in the industry. On KHL Yellow Table, we rank No. 1 in China and No.3 globally.

Across our offices in China, the US, Germany, India, and Brazil, XCMG has established a global collaborative research platform including national-level R&D facilities focused on advanced smart manufacturing technology. Our R&D team consists of top talents from around the globe. They are researching cutting-edge technologies such as new energy, unmanned driving and high-end parts. Our work has earned us numerous international patents and awards.

XCMG has the most comprehensive product line, meaning we can offer fully comprehensive solutions in 9 areas: hoisting, earthwork, road building & maintenance, mining, concrete & paving, tunnel-building & underground construction, high-altitude firefighting equipment & special-purpose vehicles, railway & bridge construction, sanitation engineering. All these solutions can be customized to suit our customers' needs.

At XCMG, our five-continent sales network gives our products worldwide visibility. We have 300 overseas distributors, over 10 overseas manufacturing bases and KD factories, and products in more than 180 countries and regions. We supply our global customers with pre-sales, mid-sales and after-sales service, and a convenient, efficient one-stop financing and leasing service. XCMG's total annual exports and overseas income consistently come top of the industry in China.

We care deeply for the welfare of the people. We support numerous charitable causes, and are quick to the scene during disaster relief efforts.

XCMG is all set to become an eternal brand with our feet on the ground and eyes on the horizon. XCMG's ambition leads us forever forwards. XCMG is scaling its Everest, and is determined to reach the top.



On December 12th, 2017, China's President Xi Jinping paid a special inspection visit to XCMG.



Hoisting Machinery



Mining Equipment



Road Building Machinery



Piling Machinery



Crane jib unit



Brand new XCMG mining machinery assembly line



Automated flexible assembly line



Modern XCMG automobile assembly line



Modern takt pull assembly line



The equipment with advanced power & free chain

XUZHOU CITY JIANGSU PROVINCE, CHINA



CONCRETE MACHINERY

● TRUCK-MOUNTED CONCRETE BOOM PUMP

● V7 DURABLE SERIES

 HB30V Chassis: SINOTRUK Drive Type: 4x2 Vertical Reach: 29.6m Theor Concrete Output: 180m³/h	 HB37V Chassis: SINOTRUK Drive Type: 4x2/364 Vertical Reach: 36.5m Theor Concrete Output: 129m³/h	 HB40V Chassis: SINOTRUK Drive Type: 6x4 Vertical Reach: 39.1 Theor Concrete Output: 129m³/h	 HB43V Chassis: SINOTRUK Drive Type: 6x4 Vertical Reach: 43m Theor Concrete Output: 170m³/h	 HB50V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 49.1 Theor Concrete Output: 180m³/h	 HB52V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 51.2 Theor Concrete Output: 180m³/h	 HB58V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 57.5 Theor Concrete Output: 180m³/h	 HB62V Chassis: SINOTRUK/BENZ Drive Type: 6x4 Vertical Reach: 61.1 Theor Concrete Output: 180m³/h
---	--	---	--	--	---	--	--

● TRAILER-MOUNTED CONCRETE LINE PUMP


● TRUCK-MOUNTED CONCRETE SPRAYING MACHINE

 HB67V Chassis: SINOTRUK/SCANIA Drive Type: 4x2 Vertical Reach: 56.1 Theor Concrete Output: 180m³/h	 HBT5008V Theor Concrete Output: 50m³/h Max Pump Pressure: 8MPa	 HBT6013V Theor Concrete Output: 40/50m³/h Max Pump Pressure: 8/13MPa	 HBT10022V Theor Concrete Output: 55/130m³/h Max Pump Pressure: 12/22MPa	 HPC30VI Chassis: SINOTRUK Drive Type: 4x2 Max Spraying Height: 18m Theor Concrete Output: 30m³/h	 HPS30VI Chassis: Made by XCMG Drive Type: 4x4 Mixing Capacity: 12m³ Theor Concrete Output: 30m³/h
---	--	--	---	--	---

● VEHICLE-MOUNTED CONCRETE LINE PUMP


● SELF-LOADING CONCRETE MIXER

● TRUCK-MOUNTED CONCRETE MIXER



 HBC10022V Chassis: SINOTRUK Theor Concrete Output: 55/100m³/h Max Pump Pressure: 12/22MPa	 SLM4V Drive Type: 4x4 Mixing Capacity: 4m³ Discharging Type: Front	 G04V Chassis: XCMG/SINOTRUK Drive Type: 4x2 Agitating Volume: 4m³	 G06V Chassis: XCMG/SINOTRUK Drive Type: 4x2 / 6x4 Agitating Volume: 6m³	 G08V Chassis: XCMG/SINOTRUK Drive Type: 6x4 Agitating Volume: 8m³	 G10V Chassis: XCMG/SINOTRUK Drive Type: 6x4 / 8x4 Agitating Volume: 10m³	 G12V Chassis: XCMG/SINOTRUK Drive Type: 6x4 / 8x4 Agitating Volume: 12m³	 G16V Chassis: XCMG/SINOTRUK Drive Type: 6x4 Agitating Volume: 16m³
---	---	--	--	--	---	---	---

● CONCRETE BATCHING PLANTS


● STANDARD

 HZ800V Central Mixer Capacity: 1.5m³ Theor Continuous Production Rate: 90m³/h	 HZ120V Central Mixer Capacity: 2m³ Theor Continuous Production Rate: 120m³/h
 HZ180V Central Mixer Capacity: 3m³ Theor Continuous Production Rate: 180m³/h	 HZ270V Central Mixer Capacity: 4.5m³ Theor Continuous Production Rate: 270m³/h

● PROJECT

 HZ560VG Central Mixer Capacity: 1m³ Theor Continuous Production Rate: 60m³/h	 HZ590VG Central Mixer Capacity: 1.5m³ Theor Continuous Production Rate: 90m³/h
 HZ120VG Central Mixer Capacity: 2m³ Theor Continuous Production Rate: 120m³/h	 HZ180VG Central Mixer Capacity: 3m³ Theor Continuous Production Rate: 180m³/h

● MOBILE













 HZ540VY Central Mixer Capacity: 0.75m³ Theor Continuous Production Rate: 40m³/h	 HZ560VY Central Mixer Capacity: 1m³ Theor Continuous Production Rate: 60m³/h
 HZ575VY Central Mixer Capacity: 1.5m³ Theor Continuous Production Rate: 75m³/h	

● CONCRETE PLACING BOOM



 HGP32 Max. Placing Radius: 32m Max. Freestanding Height: 21m Motor Power: 22kW
--

SPECIAL VEHICLE

● AERIAL WORKING PLATFORM

 XG0607DC Maximum Working Height: 7.8m Maximum Load Capacity: 240kg Total Weight: 900kg	 XG0807HD Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1500kg	 XG0807HDW Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1500kg	 XG0807DC Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1500kg	 XG0807DCW Maximum Working Height: 7.8m Maximum Load Capacity: 230kg Total Weight: 1500kg	 XG1008DC Maximum Working Height: 10m Maximum Load Capacity: 230kg Total Weight: 2100kg	 XG1012DC Maximum Working Height: 10m Maximum Load Capacity: 400kg Total Weight: 2620kg	 XG1008HD Maximum Working Height: 10m Maximum Load Capacity: 230kg Total Weight: 2100kg
 XG1012HD Maximum Working Height: 10m Maximum Load Capacity: 400kg Total Weight: 2620kg	 XG1212HD Maximum Working Height: 12m Maximum Load Capacity: 320kg Total Weight: 2900kg	 XG1212DC Maximum Working Height: 12m Maximum Load Capacity: 320kg Total Weight: 2900kg	 XG1412HD Maximum Working Height: 13.8m Maximum Load Capacity: 320kg Total Weight: 3100kg	 XG1412DC Maximum Working Height: 13.4m Maximum Load Capacity: 320kg Total Weight: 3100kg	 XG1523RT Maximum Working Height: 15m Maximum Load Capacity: 600kg Total Weight: 6400kg	 XG1614HD Maximum Working Height: 15.8m Maximum Load Capacity: 350kg Total Weight: 3700kg	 XG1614DC Maximum Working Height: 15.8m Maximum Load Capacity: 350kg Total Weight: 3700kg
 XG1823RT Maximum Working Height: 18m Maximum Load Capacity: 600kg Total Weight: 6000kg	 XG522 Maximum Working Height: 22m Maximum Load Capacity: 400kg Total Weight: 12200kg	 XG524 Maximum Working Height: 24m Maximum Load Capacity: 340kg Total Weight: 12500kg	 XG528 Maximum Working Height: 25.2m Maximum Load Capacity: 340kg Total Weight: 16600kg	 XG528K Maximum Working Height: 25.2m Maximum Load Capacity: 400kg Total Weight: 17200kg	 XG534 Maximum Working Height: 34.2m Maximum Load Capacity: 340kg Total Weight: 18400kg	 XG534K Maximum Working Height: 34.2m Maximum Load Capacity: 400kg Total Weight: 19300kg	 XG540 Maximum Working Height: 40.2m Maximum Load Capacity: 340kg Total Weight: 20600kg
 XG540K Maximum Working Height: 40.2m Maximum Load Capacity: 400kg Total Weight: 21400kg	 XG543 Maximum Working Height: 43.3m Maximum Load Capacity: 450kg Total Weight: 22000kg	 XG550K Maximum Working Height: 50m Maximum Load Capacity: 400kg Total Weight: 24400kg	 XG558 Maximum Working Height: 50.6m Maximum Load Capacity: 450kg Total Weight: 27900kg	 XGA16 Maximum Working Height: 16.05m Maximum Load Capacity: 230kg Total Weight: 7100kg	 XGA16AC Maximum Working Height: 15.8m Maximum Load Capacity: 227kg Total Weight: 6500kg	 XGA20 Maximum Working Height: 20.4m Maximum Load Capacity: 230kg Total Weight: 10600kg	 XGA20AC Maximum Working Height: 20.7m Maximum Load Capacity: 350kg Total Weight: 9100kg
 XGA20K Maximum Working Height: 20.4m Maximum Load Capacity: 350kg Total Weight: 9900kg	 XGA22K Maximum Working Height: 22m Maximum Load Capacity: 400kg Total Weight: 12400kg	 XGA26 Maximum Working Height: 26.38m Maximum Load Capacity: 230kg Total Weight: 17800kg					
 JP35C1 Rated Working Height: 35m Container Capacity: 3400kg	 JP20G1 Rated Working Height: 20m Container Capacity: 2000kg	 YT60K1 Rated Working Height: 60m Rated load on platform: 270kg	 YT53G1 Rated Working Height: 53m Rated load on platform: 300kg	 YT32G1 Rated Working Height: 32m Rated load on platform: 450kg	 PM180G1 rated reach: > 95m Container Capacity: 18100kg	 PM120G2 rated reach: > 75m Container Capacity: 12000kg	 PM80G2 rated reach: > 85m Container Capacity: 7900kg
 AP50F5 rated reach: > 85m Container Capacity: 4200kg	 AP50G1 Container load: 4200kg rated reach: > 85m	 JY120G1 Winch rated tension: 70KN Maximum work range: 9m					

● FIRE TRUCK

 DG100 Rated Working Height: 100m Rated load on platform: 400kg	 DG80C1 Rated Working Height: 80m Rated load on platform: 400kg	 DG54K3 Rated Working Height: 54m Rated load on platform: 500kg	 DG3401 Rated Working Height: 34m Rated load on platform: 500kg	 JP6201 Rated Working Height: 62m Container Capacity: 7500kg
 JP35C1 Rated Working Height: 35m Container Capacity: 3400kg	 JP20G1 Rated Working Height: 20m Container Capacity: 2000kg	 YT60K1 Rated Working Height: 60m Rated load on platform: 270kg	 YT53G1 Rated Working Height: 53m Rated load on platform: 300kg	 YT32G1 Rated Working Height: 32m Rated load on platform: 450kg
 PM180G1 rated reach: > 95m Container Capacity: 18100kg	 PM120G2 rated reach: > 75m Container Capacity: 12000kg	 PM80G2 rated reach: > 85m Container Capacity: 7900kg		
 AP50F5 rated reach: > 85m Container Capacity: 4200kg	 AP50G1 Container load: 4200kg rated reach: > 85m	 JY120G1 Winch rated tension: 70KN Maximum work range: 9m		

● INTELLIGENT EMERGENCY RESCUE PLATFORM

 RXR-JM400GL Water Row: 80 x (1 x 6%) Total dynamic head: 3.7m Max gradeability: 45°	 RXR-M40L Water Row: 0.8MPa, 40L/s Total dynamic head: 15m Wireless remote control distance: 200m	 ET112 Max. obstacle clearing capability: 2200mm Max. landing depth: 1800mm Max. walking gradeability: 45° Max. ditch width: 3500mm	 ET120 Max. obstacle clearing capability: 2400mm Max. landing depth: 2000mm Max. walking gradeability: 45° Max. ditch width: 4000mm
---	---	--	--

PILING MACHINERY

● ROTARY DRILLING RIG

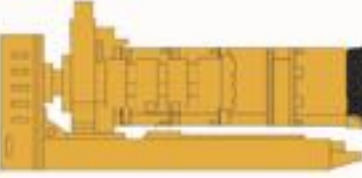
 XR60E Rated power: 42.4kW Max. drilling Dia.: φ180mm Max. drilling depth: 15m Operating weight: 14t	 XR80E Rated power: 118kW Max. drilling Dia.: φ180mm Max. drilling depth: 24m Operating weight: 27t	 XR130E Rated power: 160kW Max. drilling Dia.: φ250/φ150mm Max. drilling depth: 50m Operating weight: 45t	 XR160E Rated power: 150kW Max. drilling Dia.: φ250/φ1300*mm Max. drilling depth: 56m Operating weight: 53t	 XR180E Rated power: 189kW Max. drilling Dia.: φ300mm Max. drilling depth: 56m Operating weight: 50t	 XR200E Rated power: 212kW Max. drilling Dia.: φ300mm Max. drilling depth: 65m Operating weight: 63.05t	 XR240E Rated power: 270kW Max. drilling Dia.: φ2250/φ2000*mm Max. drilling depth: 70m Operating weight: 64t	 XR280E Rated power: 315kW Max. drilling Dia.: φ2500mm Max. drilling depth: 94m Operating weight: 100t
 XR320D Rated power: 288kW Max. drilling Dia.: φ2500/φ2200mm Max. drilling depth: 91m Operating weight: 95t	 XR360E Rated power: 345kW Max. drilling Dia.: φ2600/φ2200mm Max. drilling depth: 93m Operating weight: 115t	 XR360ES Rated power: 326kW Max. drilling Dia.: φ2500mm Max. drilling depth: 91m Operating weight: 105t	 XR400E Rated power: 373kW Max. drilling Dia.: φ2600/φ2300mm Max. drilling depth: 103m Operating weight: 118t	 XR400D Rated power: 373kW Max. drilling Dia.: φ3000/φ2800mm Max. drilling depth: 108m Operating weight: 132t	 XR450E Rated power: 395kW Max. drilling Dia.: φ3000/φ2800mm Max. drilling depth: 114m Operating weight: 165t	 XR460D Rated power: 447kW Max. drilling Dia.: φ3000/φ2800mm Max. drilling depth: 126m Operating weight: 168t	 XR460E Rated power: 447kW Max. drilling Dia.: φ3000mm Max. drilling depth: 106m Operating weight: 135t

● UNDERGROUND DIAPHRAGM WALL HYDRAULIC GRAB

 XR550D Rated power: 447kW Max. drilling Dia.: φ350mm Max. drilling depth: 132m Operating weight: 185t	 XR600E Rated power: 599kW Max. drilling Dia.: φ400mm Max. drilling depth: 155m Operating weight: 225t	 XR700E Rated power: 567kW Max. drilling Dia.: φ400mm Max. drilling depth: 160m Operating weight: 240t	 XR800E Rated power: 641kW Max. drilling Dia.: φ460mm Max. drilling depth: 150m Operating weight: 310t	 XG500E Rated power: 296/1900W/rpm Wall depth: 80/105m Wall thickness: 300-1500mm Maximum hoisting force: 500KN Total weight: 105t	 XG600E Rated power: 296/1900W/rpm Wall depth: 80/105m Wall thickness: 300-1500mm Maximum hoisting force: 600KN Total weight: 123t	 XG700E Rated power: 315/1900W/rpm Wall depth: 80/105m Wall thickness: 300-1500mm Maximum hoisting force: 700KN Total weight: 130t
--	---	---	---	--	---	--

NON-EXCAVATION MACHINERY

PIPE JACKING MACHINE



XDN500HL
Jacking shield motor power: 18.5kW
Jacking shield torque: 19kN · m
Jacking shield rotating speed: 2.7r/min
Main jacking oil cylinder thrust: 1000 × 2kN

Mars600
Jacking shield motor power: 22kW
Jacking shield torque: 15.3kN · m
Jacking shield rotating speed: 13.1r/min
Main jacking oil cylinder thrust: 1000kN

XDN600HL
Jacking shield motor power: 18.5kW
Jacking shield torque: 22kN · m
Jacking shield rotating speed: 4.2r/min
Main jacking oil cylinder thrust: 1000 × 2kN

XDN800HL
Jacking shield motor power: 30kW
Jacking shield torque: 59kN · m
Jacking shield rotating speed: 4.2r/min
Main jacking oil cylinder thrust: 1500 × 2kN

XDN1200HL
Jacking shield motor power: 45kW
Jacking shield torque: 195kN · m
Jacking shield rotating speed: 6r/min
Main jacking oil cylinder thrust: 2000 × 2kN

XDN1500
Jacking shield motor power: 30 × 2kW
Jacking shield torque: 275kN · m
Jacking shield rotating speed: 4.2r/min
Main jacking oil cylinder thrust: 2000 × 4kN

XDN1800
Jacking shield motor power: 30 × 3kW
Jacking shield torque: 412kN · m
Jacking shield rotating speed: 4.2r/min
Main jacking oil cylinder thrust: 2000 × 4kN

MARS450
Jacking shield motor power: 22kW
Jacking shield torque: 9.76kN · m
Jacking shield rotating speed: 18.6r/min
Main jacking oil cylinder thrust: 1000 × 2kN

Mars500
Jacking shield motor power: 22kW
Jacking shield torque: 15.3kN · m
Jacking shield rotating speed: 13.1r/min
Main jacking oil cylinder thrust: 1000kN

HORIZONTAL DIRECTIONAL DRILLING RIG



XZ120E
Rated power: 81/2200kW/r/min
Max. push/pull force: 130kN
Max. rotation force: 3000kN
Overall weight: 4.5t
Overall size: 4500 × 1680 × 2170mm



XZ150E
Rated power: 81/2200kW/r/min
Max. push/pull force: 160kN
Max. rotation force: 3400kN
Overall weight: 7.5t
Overall size: 5500 × 2250 × 2100mm



XZ200
Rated power: 113/2200 kW/r/min
Max. push/pull force: 225kN
Max. rotation force: 6500kN
Overall weight: 8.5t
Overall size: 5900 × 2250 × 2400mm



XZ230E
Rated power: 113/2200 kW/r/min
Max. push/pull force: 230/270kN
Max. rotation force: 6500kN
Overall weight: 8.5t
Overall size: 6100 × 2250 × 2300mm



XZ280E
Rated power: 133/2290 kW/r/min
Max. push/pull force: 236/270kN
Max. rotation force: 9000kN
Overall weight: 8.5t
Overall size: 6100 × 2250 × 2300mm



XZ320E
Rated power: 154/2290 kW/r/min
Max. push/pull force: 340kN
Max. rotation force: 12000kN
Overall weight: 10t
Overall size: 6200 × 2280 × 2450mm



XZ360E
Rated power: 154/2290 kW/r/min
Max. push/pull force: 370kN
Max. rotation force: 12000kN
Overall weight: 10.5t
Overall size: 6200 × 2280 × 2450mm



XZ430E
Rated power: 178/2200 kW/r/min
Max. push/pull force: 420/500kN
Max. rotation force: 16500kN
Overall weight: 12t
Overall size: 6500 × 2250 × 2450mm



XZ450Plus
Rated power: 194/2200 kW/r/min
Max. push/pull force: 480/560kN
Max. rotation force: 22000kN
Overall weight: 13.3/13.5t
Overall size: 8800 × 2280 × 2610mm



XZ720E
Rated power: 221/2190 kW/r/min
Max. push/pull force: 730kN
Max. rotation force: 35000kN
Overall weight: 15t
Overall size: 5800 × 1850 × 2100mm



XZ960E
Rated power: 221/2100 kW/r/min
Max. push/pull force: 970kN
Max. rotation force: 35000kN
Overall weight: 16.2t
Overall size: 10650 × 2450 × 2600mm



XZ1350
Rated power: 264/2190 kW/r/min
Max. push/pull force: 1790kN
Max. rotation force: 54000kN
Overall weight: 25t
Overall size: 11680 × 2700 × 3540mm



XZ2200
Rated power: 2 × 242/2190 kW/r/min
Max. push/pull force: 2200kN
Max. rotation force: 75000kN
Overall weight: 31t
Overall size: 12700 × 3030 × 3500mm



XZ3600
Rated power: 2 × 264/2190 kW/r/min
Max. push/pull force: 3600kN
Max. rotation force: 120000kN
Overall weight: 48t
Overall size: 17500 × 3200 × 3550mm



XZ5000
Rated power: 2 × 354/1900 kW/r/min
Max. push/pull force: 5300kN
Max. rotation force: 160000kN
Overall weight: 59t
Overall size: 20900 × 3490 × 3770mm



XZ6600
Rated power: 2 × 565/1850 kW/r/min
Max. push/pull force: 6600kN
Max. rotation force: 213000kN
Overall weight: 70t
Overall size: 19000 × 3200 × 3600mm



XZ11000
Rated power: 2 × 415/1900 kW/r/min
Max. push/pull force: 11000kN
Max. rotation force: 240000kN
Overall weight: 82t
Overall size: 20400 × 3200 × 3600mm



XZ13600
Rated power: 4 × 415/1900kW/r/min
Max. push/pull force: 13600kN
Max. rotation force: 280000kN
Overall weight: 120t
Overall size: 20000 × 3400 × 4700mm

MINING MACHINERY

EBZ SERIES ROADHEADER



EBZ135L
Gross power: 210kW
Positioning cutting height: 4000mm
Positioning cutting width: 4840mm
Overall weight: 42t



EBZ160
Gross power: 250kW
Positioning cutting height: 4800/4500mm
Positioning cutting width: 5400/5000mm
Overall weight: 47t



EBZ160L
Gross power: 250kW
Positioning cutting height: 4100mm
Positioning cutting width: 4800mm
Overall weight: 40t



EBZ160E
Gross power: 250kW
Positioning cutting height: 4500mm
Positioning cutting width: 5500mm
Overall weight: 40t



EBZ200L
Gross power: 310kW
Positioning cutting height: 4550mm
Positioning cutting width: 5650mm
Overall weight: 53t



EBZ200E
Gross power: 310kW
Positioning cutting height: 4700mm
Positioning cutting width: 5700mm
Overall weight: 58t



EBZ200A
Gross power: 325kW
Positioning cutting height: 5030/4800mm
Positioning cutting width: 6260/5700mm
Overall weight: 58t



EBZ200R
Gross power: 347kW
Positioning cutting height: 4800mm
Positioning cutting width: 5040mm
Overall weight: 80t



EBZ200M-2H
Gross power: 310kW
Positioning cutting height: 4700mm
Positioning cutting width: 5700mm
Overall weight: 65t



EBZ230
Gross power: 377kW
Positioning cutting height: 4800mm
Positioning cutting width: 6040mm
Overall weight: 80t



EBZ260
Gross power: 410.5kW
Positioning cutting height: 5030mm
Positioning cutting width: 5950mm
Overall weight: 85t



EBZ260M-3H
Gross power: 392kW
Positioning cutting height: 5150mm
Positioning cutting width: 5200mm
Overall weight: 100t



EBZ260M-4H
Gross power: 392kW
Positioning cutting height: 5150mm
Positioning cutting width: 5200mm
Overall weight: 100t



EBZ320
Gross power: 568.5kW
Positioning cutting height: 5700mm
Positioning cutting width: 7100mm
Overall weight: 120t

XTR SERIES BOOM-TYPE ROADHEADER



XTR4/180
Cutter motor power: 180/110kW
Cutting range/height: 4200mm
Cutting range/width: 4300mm
Overall weight: 47t



XTR4/230
Cutter motor power: 230/135kW
Cutting range/height: 4500mm
Cutting range/width: 5100mm
Overall weight: 60t



XTR6/320
Cutter motor power: 320/240kW
Cutting range/height: 5100mm
Cutting range/width: 5100mm
Overall weight: 125t



XTR7/360
Cutter motor power: 360/280kW
Cutting range/height: 5200mm
Cutting range/width: 7200mm
Overall weight: 140t



XTR8/500
Cutter motor power: 500kW
Cutting range/height: 6200mm
Cutting range/width: 10200mm
Overall weight: 210t



XTR6/280
Cutter motor power: 280/220kW
Cutting range/height: 4500mm
Cutting range/width: 4500mm
Overall weight: 100t

DEEP (WATER) WELL DRILLING RIG (ENERGY EXPLORATION MACHINERY)




XSL3/160
Maximum passing diameter: 0 330mm
Drilling depth: 200 (0 89m)
Maximum lifting force of feeding system: 160kN
Maximum feeding force of the feed system: 80kN
Overall weight: 9.7t



XSL5/280
Maximum passing diameter: 0 400mm
Drilling depth: 500 (0 89m)
Maximum lifting force of feeding system: 280kN
Maximum feeding force of the feed system: 120kN
Overall weight: 12t




XSL7/360
Maximum passing diameter: 0 500mm
Drilling depth: 700 (0 89m)
Maximum lifting force of feeding system: 360kN
Maximum feeding force of the feed system: 150kN
Overall weight: 13.5t



XSL12/600
Maximum passing diameter: 0 600mm
Drilling depth: 1200 (0 89m)
Maximum lifting force of feeding system: 600kN
Maximum feeding force of the feed system: 260kN
Overall weight: 47.5t



XSL20/1000
Maximum passing diameter (mm): 0 810mm
Drilling depth: 2000 (0 1141m)
Maximum lifting force of feeding system: 1000kN
Maximum feeding force of the feed system: 260kN
Overall weight: 47.5t



XSC5/280
Maximum passing diameter: 0 500mm
Drilling depth: 500 (0 89m)
Maximum lifting force of feeding system: 280kN
Maximum feeding force of the feed system: 120kN
Overall weight: 23t




XSC30/1200
Maximum passing diameter: 0 820mm
Drilling depth: 3000 (0 1141m)
Maximum lifting force of feeding system: 1200kN
Maximum feeding force of the feed system: 260kN
Overall weight: 150t

HEAVY-DUTY TRUCK

DUMP TRUCK



XGA3160
Drive Type: 4 × 2
Engine: 220HP
Transmission: 8
GCW: 20~24t
Overall size: 7 × 2.5 × 3.15m



XGA3250
Drive Type: 4 × 4
Engine: 336/321/375/420/430HP
Transmission: 9/18/12
GCW: 25t
Overall size: 8.4 × 2.5 × 3.5m



XGA3310
Drive Type: 4 × 4
Engine: 371/375/420/500HP
Transmission: 9/18/12
GCW: 31t
Overall size: 10 × 2.5 × 3.4m

TRACTOR



XGA4180
Drive Type: 4 × 2
Engine: 350/371/375/430/480/500/550HP
Transmission: 9/12/18
Traction mass: 60t
Overall size: 6.7 × 2.5 × 3.8m



XGA4250
Drive Type: 6 × 4
Engine: 350/371/375/430/480/500/550HP
Transmission: 9/12/18
Traction mass: 80~120t
Overall size: 6.7 × 2.5 × 3.10m

PURE ELECTRIC TRUCK E-DUMP TRUCK



XGA4250E/XGA4254E
Drive type: 6 × 4
GVW: 45t
Power capacity (kWh) : 422.87/281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 240/360
Transmission: 4



XGA4252E/XGA4254E1
Drive type: 6 × 4
GVW: 65t
Power capacity (kWh) : 281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 240/360
Transmission: 4



XGA5250E
Drive type: 6 × 4
GVW: 80t
Power capacity (kWh) : 281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 250/360
Transmission: 8



XGA3310E
Drive type: 6 × 4
GVW: 31t
Power capacity (kWh) : 281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 215/360
Transmission: 8



XGA5313E/XGA5317E
Drive type: 8 × 4
GVW: 45t
Power capacity (kWh) : 422.87/281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 240/360
Transmission: 8



XGA3318E/XGA3312E
Drive type: 8 × 4
GVW: 80t
Power capacity (kWh) : 422.87/281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 240/360
Transmission: 12/4

PURE ELECTRIC TRUCK E-TRACTOR



XGA4750E/XGA4180E
Drive type: 4 × 2
GVW: 75t
Power capacity (kWh) : 281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 240/360
Transmission: 4



XGA4250E
Drive type: 6 × 4
GVW: 45t
Power capacity (kWh) : 281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 215/360
Transmission: 6



XGA4750E/XGA4180E
Drive type: 4 × 2
GVW: 75t
Power capacity (kWh) : 281.91
Only Charge/Battery swap
Only Charge/Battery swap
Rated/Peak Power: 240/360
Transmission: 4

EMERGENCY RESCUE VEHICLE



JY10
Throw distance: 22m
Throw amount: 150m³/h
Chute rotation: 275°



JY16
Section Deep: 30m
Section Length: 190m
Section Diameter: 203mm



JY18
Maximum lifting capacity of main coil: 1000kg
Rated load of platform: 300kg
Grab maximum weight: 1900kg



JY20
Operation functions of vehicle: 9
Maximum excavation radius: 13m
Breaking thrust: 50kN



QC700
Equipment type: EA-152/700
Winch pull: 10kN
Hydraulic tail-plate lifting weight: 2900kg



PL3000C
Water flow: 3500m³/h
Total dynamic head: 18m
Maximum operating depth: 9.4m



PL3000F
Water flow: 3500m³/h
Total dynamic head: 18m
Maximum operating range: 65m



PL5000
Water flow: 5000m³/h
Total dynamic head: 11m
Maximum operating range: 300m

OTHERS

TRACTOR




KAT1004
Rated Power: 73.5kW
Drive Type: 4X4
Max. Pulling Force: 24kN
Max. Lifting Capacity: 25kN



KAT1104
Rated Power: 82kW
Drive Type: 4X4
Max. Pulling Force: 26kN
Max. Lifting Capacity: 25kN



KAT1204
Rated Power: 91kW
Drive Type: 4X4
Max. Pulling Force: 28kN
Max. Lifting Capacity: 31kN





XCMG

2022

Product Line Brochure

XCMG FOR YOUR SUCCESS

Products

- Hoisting Machinery
- Earthmoving Machinery
- Mining Machinery
- Road Building Machinery
- Sanitation Machinery
- Concrete Machinery
- Special Vehicles
- Piling Machinery
- Heavy-duty Trucks
- Emergency Rescue Vehicle
- Others

Under our policy of continuous product development and improvement, we reserve the right to change specifications and design without prior notice. Featured machines in photos may include additional equipment. Consult your XCMG dealer for available options and attachments.

For more complete information on XCMG products, dealer services and industry solutions, visit us on the web at www.xcmg.com

XCMG, XCMG for Your Success and www.xcmg.com, as well as corporate and product identity used herein are trademarks of XCMG and may not be used without permission.

Ref. No.XCMG210201P English
Printed in China 2022.02
XCMG



WeChat



Website



E-business



XUZHOU CONSTRUCTION MACHINERY GROUP IMP. & EXP. CO., LTD



XCMG Headquarters, Xuzhou Economic Development Zone,
Jiangsu, China 221004



(+86-516) 87739230



XCMG Regional Departments:

America	(+86-516) 87739285 87739551 87739710
Africa	(+86-516) 87735009 87739222 87739283
Asia-Pacific	(+86-516) 87739128 87739500 87739529
Central Asia	(+86-516) 87739236 87739239 87739538
Europe	(+86-516) 87739703 87739218 87739537
West Asia & North Africa	(+86-516) 87739702 87739202 87739223




















export@xcmg.com



www.xcmg.com
www.xcmgexport.en.alibaba.com

HOISTING MACHINERY





TRUCK CRANE












 XCT8L4.1 Max.Total Rated Lifting Load: 8t Max.Load Moment of Base Boom: 370kN·m Dead Weight in Travel State: 13100kg Rated Power: 303kw/2000rpm	 XCT12L4.1 Max.Total Rated Lifting Load: 12t Max.Load Moment of Base Boom: 510kN·m Dead Weight in Travel State: 17100kg Rated Power: 162kw/2300rpm	 XCT16.1 Max.Total Rated Lifting Load: 16t Max.Load Moment of Base Boom: 730kN·m Dead Weight in Travel State: 23300kg Rated Power: 180kw/2300rpm	 XCT16.Y Max.Total Rated Lifting Load: 16t Max.Load Moment of Base Boom: 730kN·m Dead Weight in Travel State: 23300kg Rated Power: 180kw/2300rpm	 QY25KC Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 1100kN·m Dead Weight in Travel State: 30200kg Rated Power: 221kw/2200rpm	 QY25K5D Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 1000kN·m Dead Weight in Travel State: 30000kg Rated Power: 221kw/2200rpm
 XCT25L4.S Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 961kN·m Dead Weight in Travel State: 29000kg Rated Power: 162kw/2300rpm	 XCT25L5.S Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 960kN·m Dead Weight in Travel State: 27000kg Rated Power: 245/1900kV·h/min	 XCT25L4.SR Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 961kN·m Dead Weight in Travel State: 28000kg Rated Power: 162kw/2300rpm	 XCT25L5.SR Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 960kN·m Dead Weight in Travel State: 30000kg Rated Power: 162kw/2300rpm	 XCT25L4.Y Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 960kN·m Dead Weight in Travel State: 27000kg Rated Power: 152kw/2300rpm/152kw/2300rpm	 XCT25L5.Y Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 960kN·m Dead Weight in Travel State: 30000kg Rated Power: 152kw/2300rpm/152kw/2300rpm
 XCT30.S Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 1125kN·m Dead Weight in Travel State: 32000kg Rated Power: 245/1900kV·h/min	 XCT30.Y Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 905kN·m Dead Weight in Travel State: 28700kg Rated Power: 192/2200kV·h/min	 XCT30.M Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 905kN·m Dead Weight in Travel State: 30000kg Rated Power: 192/2200kV·h/min	 XCT35.U Max.Total Rated Lifting Load: 35t Max.Load Moment of Base Boom: 854000kN	 XCT35.BR Max.Total Rated Lifting Load: 35t Max.Load Moment of Base Boom: 1710kN·m Dead Weight in Travel State: 33400kg Rated Power: 220kw/2300rpm	 XCT40U Max.Total Rated Lifting Load: 40t Max.Load Moment of Base Boom: 780000kN Dead Weight in Travel State: 40700kg
 XCT45.E Max.Total Rated Lifting Load: 45t Max.Load Moment of Base Boom: 1390kN·m Dead Weight in Travel State: 32000kg	 XCT50.Y Max.Total Rated Lifting Load: 50t Max.Load Moment of Base Boom: 2000kN·m Dead Weight in Travel State: 40100kg Rated Power: 320kw/2200rpm/320kV·h/min/320kw/1900rpm	 XCT50.M Max.Total Rated Lifting Load: 50t Max.Load Moment of Base Boom: 2000kN·m Dead Weight in Travel State: 40300kg Rated Power: 247kw/2200rpm	 XCT55.S Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2600kN·m Dead Weight in Travel State: 46000kg Rated Power: 278kw/2200rpm	 XCT60L5 Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 2200kN·m Dead Weight in Travel State: 46000kg Rated Power: 278kw/1900rpm	 XCT60.Y Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 2000kN·m Dead Weight in Travel State: 41700kg Rated Power: 320kw/2200rpm/320kV·h/min/320kw/1900rpm
 XCT60.M Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 2000kN·m Dead Weight in Travel State: 42000kg Rated Power: 247kw/2200rpm	 XCT70.S Max.Total Rated Lifting Load: 70t Max.Load Moment of Base Boom: 2030kN·m Dead Weight in Travel State: 44000kg Rated Power: 268kw/1900rpm	 XCT75.S Max.Total Rated Lifting Load: 75t Max.Load Moment of Base Boom: 2175kN·m Dead Weight in Travel State: 46000kg Rated Power: 268kw/1900rpm	 XCT80L5.1 Max.Total Rated Lifting Load: 80t Max.Load Moment of Base Boom: 2300kN·m Dead Weight in Travel State: 48000kg/50000kg Rated Power: 257kw/1900rpm	 XCT90.S Max.Total Rated Lifting Load: 90t Max.Load Moment of Base Boom: 2175kN·m Dead Weight in Travel State: 54000kg Rated Power: 278kw/2000rpm	 XCT90.Y Max.Total Rated Lifting Load: 90t Max.Load Moment of Base Boom: 2070kN·m Dead Weight in Travel State: 54000kg Rated Power: 320kw/2200rpm/320kV·h/min/320kw/1900rpm

ALL TERRAIN CRANE


















XCA1800
Max.Total Rated Lifting Load: 1800t
Max.Load Moment of Base Boom: 36000kN·m
Dead Weight in Travel State: 90000kg
Rated Power: 485kw/1800rpm



 XCT80.BR Max.Total Rated Lifting Load: 80t Max.Load Moment of Base Boom: 2940kN·m Dead Weight in Travel State: 40800kg Rated Power: 278kw/1900rpm	 XCT85.M Max.Total Rated Lifting Load: 85t Max.Load Moment of Base Boom: 3175kN·m Dead Weight in Travel State: 46000kg Rated Power: 247kw/2200rpm	 XCT90.BR Max.Total Rated Lifting Load: 90t Max.Load Moment of Base Boom: 2670kN·m Dead Weight in Travel State: 48000kg Rated Power: 278kw/1900rpm	 XCT100.1 Max.Total Rated Lifting Load: 100t Max.Load Moment of Base Boom: 4030kN·m Dead Weight in Travel State: 54000kg Rated Power: 358kw/1900rpm
 XCT100.M Max.Total Rated Lifting Load: 100t Max.Load Moment of Base Boom: 3528kN·m Dead Weight in Travel State: 48000kg Rated Power: 259kw/1900rpm	 XCT100.BR Max.Total Rated Lifting Load: 100t Max.Load Moment of Base Boom: 3528kN·m Dead Weight in Travel State: 48000kg Rated Power: 278kw/2000rpm	 XCT110.1 Max.Total Rated Lifting Load: 110t Max.Load Moment of Base Boom: 4030kN·m Dead Weight in Travel State: 54000kg Rated Power: 358kw/1900rpm	 XCT130.1 Max.Total Rated Lifting Load: 130t Max.Load Moment of Base Boom: 5200kN·m Dead Weight in Travel State: 54000kg Rated Power: 358kw/1900rpm

 XCA40.E Max.Total Rated Lifting Load: 40t Max.Load Moment of Base Boom: 1191kN·m Dead Weight in Travel State: 24000kg Rated Power: 320kw/1800rpm	 XCA60.E Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 1600kN·m Dead Weight in Travel State: 36000kg Rated Power: 280/1700kV·h/min	 XCA100.E Max.Total Rated Lifting Load: 100t Max.Load Moment of Base Boom: 3000kN·m Dead Weight in Travel State: 40000kg Rated Power: 320/1700/125/2200kV·h/min	 XCA100.S Max.Total Rated Lifting Load: 100t Max.Load Moment of Base Boom: 2600kN·m Dead Weight in Travel State: 40000kg Rated Power: 320/1600/145/2200kV·h/min	 XCA110.U Max.Total Rated Lifting Load: 110t Max.Load Moment of Base Boom: 2200kN·m Dead Weight in Travel State: 30700kg Rated Power: 458kV·h/min/1700rpm	 XCA130.E Max.Total Rated Lifting Load: 130t Max.Load Moment of Base Boom: 4400kN·m Dead Weight in Travel State: 46000kg Rated Power: 360/1700kV·h/min
 XCA130L7.1 Max.Total Rated Lifting Load: 130t Max.Load Moment of Base Boom: 5740kN·m Dead Weight in Travel State: 94000kg Rated Power: 356kw/1900rpm	 XCA200 Max.Total Rated Lifting Load: 200t Max.Load Moment of Base Boom: 6600kN·m Dead Weight in Travel State: 78000kg Rated Power: 400kw/1900rpm	 XCA220.S Max.Total Rated Lifting Load: 220t Max.Load Moment of Base Boom: 7800kN·m Dead Weight in Travel State: 161370kg Rated Power: 301/1180kV·h/min	 XCA230 Max.Total Rated Lifting Load: 230t Max.Load Moment of Base Boom: 7700kN·m Dead Weight in Travel State: 16000kg Rated Power: 400kw/1800rpm	 XCA250.BR Max.Total Rated Lifting Load: 250t Max.Load Moment of Base Boom: 7200kN·m Dead Weight in Travel State: 46000kg Rated Power: 360kw/1900rpm	 XCA260 Max.Total Rated Lifting Load: 260t Max.Load Moment of Base Boom: 8000kN·m Dead Weight in Travel State: 46000kg Rated Power: 400kw/1900rpm
 XCA275.U Max.Total Rated Lifting Load: 275t Max.Load Moment of Base Boom: 14560kN·m Dead Weight in Travel State: 132250kg Rated Power: 523kV·h/min/1700rpm	 XCA300-I Max.Total Rated Lifting Load: 300t Max.Load Moment of Base Boom: 9900kN·m Dead Weight in Travel State: 100000kg Rated Power: 400kw/1900rpm	 XCA350.U Max.Total Rated Lifting Load: 350t Max.Load Moment of Base Boom: 161370kg Dead Weight in Travel State: 16000kg Rated Power: 570kV·h/min/1700rpm	 XCA400 Max.Total Rated Lifting Load: 400t Max.Load Moment of Base Boom: 12340kN·m Dead Weight in Travel State: 16000kg Rated Power: 402.2kw/1800rpm	 XCA460 Max.Total Rated Lifting Load: 460t Max.Load Moment of Base Boom: 13800kN·m Dead Weight in Travel State: 16000kg Rated Power: 402.2kw/1800rpm	 XCA500 Max.Total Rated Lifting Load: 500t Max.Load Moment of Base Boom: 15000kN·m Dead Weight in Travel State: 46000kg Rated Power: 400kw/1900rpm

ROUGH TERRAIN CRANE

 QAY650A Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 1900kN·m Dead Weight in Travel State: 94000kg Rated Power: 402.2/1800/125/2200kV·h/min	 XCA750 Max.Total Rated Lifting Load: 750t Max.Load Moment of Base Boom: 22500kN·m Dead Weight in Travel State: 154420kg Rated Power: 1480/1800/1205/2200kV·h/min	 XCA1200.1 Max.Total Rated Lifting Load: 1200t Max.Load Moment of Base Boom: 35200kN·m Dead Weight in Travel State: 80000kg Rated Power: 1402.2/1800/1205/2200kV·h/min	 XCA1600 Max.Total Rated Lifting Load: 1600t Max.Load Moment of Base Boom: 71300kN·m Dead Weight in Travel State: 107000kg Rated Power: 1402.2/1800/1205/2200kV·h/min	 XCR25L5 Max.Total Rated Lifting Load: 25t Max.Load Moment of Base Boom: 903kN·m Dead Weight in Travel State: 28357kg Rated Power: 1342kw/2200rpm/1162kw/2900rpm	 XCR30 Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 981kN·m Dead Weight in Travel State: 27400kg Rated Power: 162/2200kV·h/min
 XCR30.S Max.Total Rated Lifting Load: 30t Max.Load Moment of Base Boom: 981kN·m Dead Weight in Travel State: 27400kg Rated Power: 162kw/2200rpm	 XCR35 Max.Total Rated Lifting Load: 35t Max.Load Moment of Base Boom: 1200kN·m Dead Weight in Travel State: 30057kg Rated Power: 162/2200kV·h/min	 XCR35.S Max.Total Rated Lifting Load: 35t Max.Load Moment of Base Boom: 1200kN·m Dead Weight in Travel State: 30057kg Rated Power: 162kw/2200rpm	 XCR55L4 Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 40215kg Rated Power: 162/2200kV·h/min	 XCR55L4.M Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 40215kg Rated Power: 162kw/2200rpm	 XCR55L5 Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 40000kg Rated Power: 162/2200kV·h/min
 XCR55L5.S Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 41000kg Rated Power: 162kw/2200rpm	 XCR55L5.M Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 43000kg Rated Power: 162kw/2200rpm	 XCR55L5.E Max.Total Rated Lifting Load: 55t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 41000kg Rated Power: 194/2200kV·h/min	 XCR60L5.U Max.Total Rated Lifting Load: 60t Max.Load Moment of Base Boom: 14990kN·m Dead Weight in Travel State: 92152 kg Rated Power: 280/2200kV·h/min	 XCR70 Max.Total Rated Lifting Load: 70t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 44000kg Rated Power: 192/2000kV·h/min	 XCR70.S Max.Total Rated Lifting Load: 70t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 44000kg Rated Power: 192/2000kV·h/min
 XCR70.M Max.Total Rated Lifting Load: 70t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 44000kg Rated Power: 192kw/2200rpm	 XCR70.E Max.Total Rated Lifting Load: 70t Max.Load Moment of Base Boom: 2023.5kN·m Dead Weight in Travel State: 44000kg Rated Power: 194/2200kV·h/min	 XCR75.U Max.Total Rated Lifting Load: 75t Max.Load Moment of Base Boom: 1496218 N·m Dead Weight in Travel State: 154323 kg Rated Power: 280kw/2200rpm	 XCR90 Max.Total Rated Lifting Load: 90t Max.Load Moment of Base Boom: 2840kN·m Dead Weight in Travel State: 53400kg Rated Power: 192/2200kV·h/min	 XCR90.M Max.Total Rated Lifting Load: 90t Max.Load Moment of Base Boom: 2840kN·m Dead Weight in Travel State: 53400kg Rated Power: 192kw/2200rpm	 XCR100.U Max.Total Rated Lifting Load: 100t Max.Load Moment of Base Boom: 20900kN·m Dead Weight in Travel State: 117000 kg Rated Power: 280/2200kV·h/min
 XCR120 Max.Total Rated Lifting Load: 120t Max.Load Moment of Base Boom: 29670kN·m Dead Weight in Travel State: 90000kg Rated Power: 275/2200kV·h/min	 XCR130.U Max.Total Rated Lifting Load: 257920 kg Max.Load Moment of Base Boom: 2632 N·m Dead Weight in Travel State: 154420 kg Rated Power: 305/2200kV·h/min				

CRAWLER CRANE

 XGC100A Rated power:199kw/2000rpm Operating weight:81.2t Max total rated lifting load:100t Max load moment of base boom: 429t·m	 XGC55 rated power:199kw/2000rpm operating weight:46.3t max total rated lifting load:50t max load moment of base boom: 208t·m	 XGC75 rated power:199kw/2000rpm operating weight:61.3t max total rated lifting load:70t max load moment of base boom: 298t·m	 XGC85 rated power:199kw/2000rpm operating weight:71.3t max total rated lifting load:85t max load moment of base boom: 347t·m	 XGC130-1 Rated Power: 200kW/1800rpm Operating Weight: 121.1t Max. Total Rated Lifting Load: 130t Max. Load Moment of Base Boom: 702t·m
 XGC150-1A Rated power:200kw/1800rpm Operating weight:142t Max total rated lifting load:150t Max load moment of base boom: 840t·m	 XLC180 Rated power:243kW/2000rpm Operating weight:153t Max total rated lifting load:180t Max load moment of base boom: 1050t·m	 XLC220 Rated power:243kW/2000rpm Operating weight:170t Max total rated lifting load:220t Max load moment of base boom: 1239t·m	 XLC260 Rated power:243kW/2000rpm Operating weight:224.1t Max total rated lifting load:260t Max load moment of base boom: 1430t·m	 XGC320 rated power:243kw/1900rpm operating weight:200t max total rated lifting load:320t max load moment of base boom: 1870t·m
 XGC350 Rated power:330kw/1900rpm Operating weight:200t Max total rated lifting load:350t Max load moment of base boom: 2400t·m	 XGC400-I Rated power:330kw/1800rpm Operating weight:200t Max total rated lifting load:400t Max load moment of base boom: 5200t·m	 XGC500A Rated power:330kw/1900rpm Operating weight:270t Max total rated lifting load:500t Max load moment of base boom: 6500t·m	 XGC11000(650t) Rated power:420kw/1800rpm Operating weight:485t Max total rated lifting load:600t Max load moment of base boom: 10000t·m	 XGC12000(800t) Rated power:500kw/2100rpm Operating weight:504t Max total rated lifting load:800t Max load moment of base boom: 12500t·m
 XGC15000A(1000t) Rated power:500kw/2100rpm Operating weight:508t Max total rated lifting load:1000t Max load moment of base boom: 14500t·m	 XGC16000(1250t) Rated power:541kw/2100rpm Operating weight:590t Max total rated lifting load:1250t Max load moment of base boom: 15510t·m	 XGC17000(1250t) Rated power:641kw/2100rpm Operating weight:620t Max total rated lifting load:1250t Max load moment of base boom: 17000t·m		


TELESCOPIC CRAWLER CRANE

 XGC2800Q(2000t) rated power:2 x 4000kw/1800rpm operating weight:1250t max total rated lifting load:2000t max load moment of base boom: 20000t·m	 XGC8800Q(4000t) Rated power:3 X 841kw/2100rpm Operating weight:590t Max total rated lifting load:3600t Max load moment of base boom: 88000t·m	
---	---	--

● UNDERGROUND LOAD HAUL DUMP

				
XUL202 Empty weight(t): 6.9 Rated load capacity(t): 2 Bucket capacity(m³): 1 Transport dimension(L x W x H, mm) 8132 x 1300 x 1090 (1090)	XUL305 Empty weight(t): 13.2 Rated load capacity(t): 5 Bucket capacity(m³): 2 Transport dimension(L x W x H, mm) 7120 x 1790 x 2018	XUL307 Empty weight(t): 16.9 Rated load capacity(t): 7 Bucket capacity(m³): 3 Transport dimension(L x W x H, mm) 8790 x 2250 x 2285	XUL410 Empty weight(t): 28 Rated load capacity(t): 10 Bucket capacity(m³): 4 Transport dimension(L x W x H, mm) 9700 x 2550 x 2285	XUL514D Empty weight(t): 38 Rated load capacity(t): 14 Bucket capacity(m³): 6 Transport dimension(L x W x H, mm) 10730 x 2830 x 2570

● WHEEL LOADER

								
XC9350 Bucket Load 18.0m³ Rated Load 35000kg Rated Power 370kW Operating Weight: 15000kg Max. Breakout Force: 301kN Overall Dimension(LxWxH): 17250x6080x3400mm	LW150FV Bucket Capacity: 0.7m³ Rated Load 11000kg Rated power 55kW Operating weight: 4000kg Max. Breakout: 44kN Overall Dimension (L x W x H) : 6100 x 2060 x 2800mm	LW160FV super Bucket Capacity: 0.7m³ Rated Load 11000kg Rated power 54.5kW Operating weight: 4000kg Max. Breakout: 44kN Overall Dimension (L x W x H) : 6150mm x 2060mm x 2850mm	LW180FV Bucket Capacity: 1.0m³ Rated Load 14000kg Rated power 61.8kW Operating weight: 5300kg Max. Breakout: 44kN Overall Dimension (L x W x H) : 6150mm x 2060mm x 2850mm	LW180K(V) Bucket Capacity: 1.1m³ Rated Load 14000kg Rated power 56.98 kW Operating weight: 5300kg Max. Breakout: 44kN Overall Dimension (L x W x H) : 6045mm x 2060mm x 2900mm	LW200FV super Bucket Capacity: 1.0m³ Rated Load 15000kg Rated power 70kW Operating weight: 5500kg Max. Breakout: 44kN Overall Dimension (L x W x H) : 6190mm x 2060mm x 2900mm	LW200K(V) Bucket Capacity: 1.1m³ Rated Load 20000kg Rated power: 66.06 kW Operating weight: 5500kg Max. Breakout: 50kN Overall Dimension (L x W x H) : 6045mm x 2060mm x 2950mm	LW330FN Bucket Load 2.1m³ Rated Load 3300kg Rated Power: 32kW Operating Weight: 1000kg Max. Breakout: 120kN Overall Dimension(LxWxH): 7470 x 2462 x 3320 mm	
								
LW350KN Bucket Load 2.1m³ Rated Load 3500kg Rated Power 32kW Operating Weight: 1000kg Max. Breakout: 124kN Overall Dimension(LxWxH): 7345 x 2432 x 3320mm	LW400KN Bucket Load 2.4m³ Rated Load 4000kg Rated Power: 32kW Operating Weight: 1400kg Max. Breakout: 150kN Overall Dimension(LxWxH): 7800 x 2718 x 3480mm	XC916 Operating Weight: 4500kg Bucket Capacity: 0.7m³ Max. Breakout Force: >38kN Engine Model: YUM60D1 DE70 Engine Power: 36.8kW Motor Power: 54kW Overall Dimension (L*W*H) : 5140x1812x2540mm	XC918-EV Operating Weight: 6700kg Bucket Capacity: 1.0m³ Max. Breakout Force: >38kN Motor Type: Permanent Magnet Synchronous Motor Overall Dimension (L*W*H) : 5140x1812x2540mm	XC938 Operating Weight: 13500kg Bucket Load 1.3m³ Max. Breakout: 130kN Rated Load: 3500kg Rated Power: 270kW Engine Power: 98kW Overall Dimension(LxWxH): 7700x2402x3405mm	XC948 Operating Weight: 16000kg Bucket Capacity: 2.4m³ Max. Breakout Force: 140kN Engine Model: Cummins B6.7 Engine Power: 140kW/2200rpm Overall Dimension(L*W*H): 7800mm*2550mm*3405mm	XC958 Operating Weight: 18200kg Bucket Capacity: 3.1m³ Max. Breakout Force: 175kN Engine Model: Cummins B6.7 Engine Power: 168kW/2200rpm Overall Dimension(L*W*H): 8335mm*3200mm*3435mm	XC968 Operating Weight: 21300kg Bucket Capacity: 3.5m³ Max. Breakout Force: 220kN Engine Model: Cummins L3 Engine Power: 210kW/2100rpm Overall Dimension(L*W*H): 8603mm*3290mm*3625mm	XC978 Operating Weight: 24000kg Bucket Capacity: 4.2m³ Max. Breakout Force: >210kN Engine Model: Cummins L3 Engine Power: 240kW/2100rpm Overall Dimension(L*W*H): 8950mm*3230mm*3620mm
								
XC990 Operating Weight: 3050kg Bucket Capacity: 5.4m³ Max. Breakout Force: >260kN Engine Model: Cummins X12 Engine Power: 261kW/2000rpm Overall Dimension(L*W*H): 9500 x 3220 x 3620mm	LW550FN Bucket Load 3.5m³ Rated Load 5300kg Rated Power: 162kW Operating Weight: 17100kg Max. Breakout: 170kN Overall Dimension(LxWxH): 8300x2996x3515mm	ZL50GN Bucket Load 3.2m³ Rated Load 5000kg Rated Power: 162kW Operating Weight: 17100kg Max. Breakout: 170kN Overall Dimension(LxWxH): 8300x2996x3515mm	LW600KN Bucket Load 4.5m³ Rated Load 6000kg Rated Power: 171kW Operating Weight: 20200kg Max. Breakout: 205kN Overall Dimension(LxWxH): 8900 x 3290 x 3620mm	LW700HV Bucket Load 4.2m³ Rated Load 7000kg Rated Power: 270kW Operating Weight: 22500kg Max. Breakout: 215kN Overall Dimension(LxWxH): 8900 x 3290 x 3620mm	LW700KN Bucket Load 4.2m³ Rated Load 7000kg Rated Power: 270kW Operating Weight: 22500kg Max. Breakout: 215kN Overall Dimension(LxWxH): 8900 x 3290 x 3620mm	LW700FV Bucket Load 4.5m³ Rated Load 7000kg Rated Power: 270kW Operating Weight: 22500kg Max. Breakout: 215kN Overall Dimension(LxWxH): 9000 x 3230 x 3620mm	LW800HV Bucket Load 4.8m³ Rated Load 8000kg Rated Power: 290kW Operating Weight: 25000kg Max. Breakout: 245kN Overall Dimension(LxWxH): 9100 x 3230 x 3620mm	LW800KN Bucket Load 4.8m³ Rated Load 8000kg Rated Power: 290kW Operating Weight: 25000kg Max. Breakout: 250kN Overall Dimension(LxWxH): 9470 x 3230 x 3730mm



● CLAPPER LOADER

								
LW900KN Bucket Load 5.5m³ Rated Load 9000kg Rated Power 261kW Operating Weight: 28500kg Max. Breakout Force: 280kN Overall Dimension(LxWxH): 9400 x 3430 x 3730mm	LW1200KN Bucket Load 6.5m³ Rated Load 12000kg Rated Power 418kW Operating Weight: 51000kg Max. Breakout Force: 394kN Overall Dimension(LxWxH): 12337x3871x4315mm	LW1400KN Bucket Load 7.0m³ Rated Load 14000kg Rated Power 418kW Operating Weight: 51000kg Max. Breakout Force: 394kN Overall Dimension(LxWxH): 12480x3900x4350mm	LW160K(V) Min. Clamping Diameter: 800mm Rated Load 1800kg Rated Power: 50.5kW Operating Weight: 6320kg Overall Dimension(LxWxH): 6415x1960x2950mm	LW200K(V) Min. Clamping Diameter: 800mm Rated Load 1800kg Rated Power: 50.5kW Operating Weight: 6320kg Overall Dimension(LxWxH): 6415x1960x2950mm	LW300K(V) Min. Clamping Diameter: 800mm Rated Load 3000kg Rated Power: 91.3kW Operating Weight: 1120kg Overall Dimension(LxWxH): 7450x2482x3320mm	LW550FN Min. Clamping Diameter: 1000mm Rated Load 5000kg Rated Power: 162kW Operating Weight: 17100kg Max. Breakout Force: 170kN Overall Dimension(LxWxH): 8680x2950x3515mm	ZL50GN Min. Clamping Diameter: 1000mm Rated Load 5000kg Rated Power: 162kW Operating Weight: 17100kg Max. Breakout Force: 170kN Overall Dimension(LxWxH): 8680x2950x3515mm	LW500KN Min. Clamping Diameter: 900mm Rated Load 6000kg Rated Power: 178kW Operating Weight: 20800kg Max. Breakout Force: 170kN Overall Dimension(LxWxH): 8805x2860x3515mm

● SKIDDER

		
LW700K(V) Min. Clamping Diameter: 1000mm Rated Load 7000kg Rated Power: 228kW Operating Weight: 23800kg Overall Dimension(LxWxH): 9233x3200x3620mm	LW800K(V) Min. Clamping Diameter: 1000mm Rated Load 8000kg Rated Power: 261kW Operating Weight: 28500kg Overall Dimension(LxWxH): 9690x3210x3785mm	XC360 Shovel Capacity: 178kN Operating Weight: 10700kg Max. Breakout Force: 171kN Logging Width Diameter (Cable Type): 273mm Belt Cutting Depth: 450mm Overall Dimension(LxWxH): 8322x2996x3515mm

● GAS-POWERED LOADER

	
LW500K(V)-LNG Bucket Load 3.5m³ Rated Load 5000kg Rated Power: 162kW Operating Weight: 17100kg Max. Breakout Force: 170kN Overall Dimension(LxWxH): 8322x2996x3515mm	LW600K(V)-LNG Bucket Load 3.5m³ Rated Load 6000kg Rated Power: 171kW Operating Weight: 21500kg Max. Breakout Force: 205kN Overall Dimension(LxWxH): 8700x3220x3515mm


● UNDERGROUND LOADER

	
ZL20E Bucket Load 1.0m³ Rated Load 2000kg Rated Power: 56.2kW Operating Weight: 8300kg Max. Breakout Force: 55kN Overall Dimension(LxWxH): 5900x1960x2950mm	ZL30E Bucket Load 1.5m³ Rated Load 3000kg Rated Power: 92kW Operating Weight: 10000kg Max. Breakout Force: 83kN Overall Dimension(LxWxH): 7470x2482x3320mm

● SIDE DUMPING LOADER


ZL50GN Bucket Load 2.5m³ Rated Load 5000kg Rated Power: 162kW Operating Weight: 17000kg Max. Breakout Force: 170kN Overall Dimension(LxWxH): 8915 x 3020 x 3515mm

● ROCK-FORKLIFT LOADER

		
LW500K(V)-T18 Bucket Load: 18000lit Rated Load: 14000mm heightkg Rated Power: 162kW Attachment Dimension(LxWxH): 1840x1540x1200mm Max. Dump angle: 22.5° Overall Dimension(LxWxH): 8280x2945x3515mm	LW600K(V)-T25 Bucket Load: 25000lit Rated Load: 15000mm heightkg Rated Power: 178kW Attachment Dimension(LxWxH): 1990x1637x1440mm Max. Dump angle: 22.5° Overall Dimension(LxWxH): 8750x3290x3585mm	LW700K(V)-T33 Bucket Load: 33000lit Rated Load: 18000mm heightkg Rated Power: 178kW Attachment Dimension(LxWxH): 1990x1637x1440mm Max. Dump angle: 25° Overall Dimension(LxWxH): 8710x3272x3650mm

● SKID-STEER LOADER

			
XC740K Bucket Load: 0.45m³ Rated Load: 750kg Rated Power: 36.8/35.5kW Operating Weight: 3800kg Overall Dimension(LxWxH): 3315x1900x1950mm	XC750K Bucket Load: 0.45m³ Rated Load: 900kg Rated Power: 50.2kW Operating Weight: 3400kg Overall Dimension(LxWxH): 3360x1880x1950mm	XC760K Bucket Load: 0.5m³ Rated Load: 1000kg Rated Power: 61.3kW Operating Weight: 3450kg Overall Dimension(LxWxH): 3615x2000x1960mm	XC770K Bucket Load: 0.5m³ Rated Load: 1250kg Rated Power: 81.3kW Operating Weight: 3700kg Overall Dimension(LxWxH): 3750x2000x1960mm

● STEEL MILE LOADER

	
LW440FN Bucket Load 2.4m³ Rated Load 4000kg Rated Power: 129kW Operating Weight: 14000kg Max. Breakout Force: 150kN Overall Dimension(LxWxH): 7800 x 2718 x 3480mm	ZL50GN Bucket Load 2.5m³ Rated Load 5000kg Rated Power: 162kW Operating Weight: 17000kg Max. Breakout Force: 170kN Overall Dimension(LxWxH): 8290 x 3000 x 3515mm

● BACKHOE LOADER

		
WZ30-25 Bucket Load: 1m³ Rated Load: 2500kg Rated Power: 63/73.5kW Operating Weight: 9500kg Max. Breakout Force: 78kN Overall Dimension(LxWxH): 8000x2353x3450mm	XC870K Bucket Load 1m³ Rated Load: 2500kg Rated Power: 70/72/74/3.0kW Operating Weight: 7800kg Max. Breakout Force: 83kN Overall Dimension(LxWxH): 7445x2350x3450mm	XC870HK Bucket Load 1m³ Rated Load: 2500kg Rated Power: 70/72/74/3.0kW Operating Weight: 8200kg Max. Breakout Force: 83kN Overall Dimension(LxWxH): 8075x2350x3450mm

● TELESCOPIC HANDLER

		
XC6-300TK Max. Lift Capacity: 3000kg Lifting Height: 9500mm Rated Load: 900kg Operating Weight: 7450kg Max. Tractive Force (with load): > 58kN Overall Dimension(LxWxH): 4825 x 2350 x 2480mm Fork Length: 1800mm	XC6-3514K Max. Lift Capacity: 3500kg Lifting Height: 13700mm Rated Load: 70/74.5kW Operating Weight: 7450kg Max. Tractive Force (with load): > 58kN Overall Dimension(LxWxH): 6300 x 2500 x 2740mm Fork Length: 1200mm	XC6-4517K Max. Lift Capacity: 4500kg Lifting Height: 16700mm Rated Load: 82/74.5kW Operating Weight: 13500kg Max. Tractive Force (with load): > 70/72kN Overall Dimension(LxWxH): 8900 x 2500 x 2850mm Fork Length: 1200mm

● CRAWLER DOZER

		
TY130 Rated Power: 35.5kW Operating Weight: 15,310kg 33,720lb Blade Width x Height: 3.275m x 1.140m 107" x 39" Dimensions(L x W x H): 8.620m x 3.275m x 2.815m 17'11" x 10'7" x 9'3" (with straight 90 blade and three-shank ripper)	TY160 Rated Power: 131kW 176HP 1,800rpm Operating Weight: 18,890kg 41,600lb Blade Width x Height: 3.475m x 1.140m 112" x 39" Dimensions(L x W x H): 8.620m x 3.475m x 2.815m 21'1" x 11'2" x 9'11" (with straight 90 blade and three-shank ripper)	TY230 Rated Power: 108kW 146HP 1,800rpm Operating Weight: 26,000kg 57,300lb Blade Width x Height: 3.725m x 1.130m 121" x 47" Dimensions(L x W x H): 8.730m x 3.725m x 3.470m 22'4" x 47" x 11'3" (with straight 90 blade and three-shank ripper and ROPS)

● WHEEL BULLDOZER

		
DL210 Shovel Capacity: 3.5m³ Rated Power: 162kW Operating Weight: 16200kg Working Width: 1480mm 7430x2354x3515mm	DL350 Shovel Capacity: 5.8m³ Rated Power: 261kW Operating Weight: 25000kg Max. Breakout Force: 158kN Overall Dimension(LxWxH): 7950x4430x3805mm	DL560 Shovel Capacity: 10.5m³ Rated Power: 478kW Operating Weight: 47800kg Max. Breakout Force: 158kN Overall Dimension(LxWxH): 10230x5290x4315mm

ROAD BUILDING MACHINERY

● STATIC THREE-DRUM ROLLER



3Y153J
 Engine manufacturer: ShangChai
 Rated Power: 88kw stageII
 Operating weight: 12000-15000 kg
 Working width: 2120 mm
 Overall dimensions (mm) :
 6224 x 2120 x 3297



3Y223J
 Engine: ShangChai
 Rated Power:
 82kw stageII
 Operating Weight: 19000-22900kg
 Working Width: 2120mm
 Size: 6205 x 2420 x 3348



3Y263J
 Engine:
 Rated
 93kw
 Operating
 22000-26000kg
 Working
 Width: 2130mm
 Size:



XS103H
 Engine: ShangChai
 Rated Power:
 105kw stageII
 Operating Weight: 10600kg
 Working Width: 2130mm
 Size: 6150 x 2300 x 3290



XS115
 Engine: Cummins
 Rated Power:
 115kw stageII
 Operating Weight: 11000kg
 Working Width: 2130mm
 Size: 5990x2300x2990



XS113(stageII/III)
 Engine: Cummins
 Rated Power:
 93kw stageII/194kw stageIII
 Operating Weight: 18000kg
 Working Width: 2130mm
 Size: 5940 x 2300 x 3150



XS113(E)
 Engine: Cummins
 Rated Power:
 105kw stageII
 Operating Weight: 12000kg
 Working Width: 2130mm
 Size: 5940 x 2300 x 3150



XS143
 Engine: Cummins
 Rated Power:
 125kw stageII
 Operating Weight: 14000kg
 Working Width: 2130mm
 Size: 6200 x 2300 x 3290



XS143J
 Engine: ShangChai
 Rated Power:
 123kw stageII
 Operating Weight: 14000kg
 Working Width: 2130mm
 Size: 6150 x 2300 x 3200



XS205S
 Engine: Cummins
 Rated Power:
 142kw stageII
 Operating Weight: 20000kg
 Working Width: 2130mm



XS203
 Engine: ShangChai
 Rated Power:
 106kw stageII
 Operating Weight: 20000kg
 Working Width: 2130mm



XS203J (stageII)
 Engine: ShangChai
 Rated Power:
 123kw stageII/128kw stageIII
 Operating Weight: 20000kg
 Working Width: 2130mm

PAVER

 RP355 Engine Cummins 53kw stage II Paving Range:1.2 - 3.5m Transport Weight:7500kg maximum laydown rate:300t/h Size:4116 x 1650 x 2055	 RP453L Engine ShangChai 73.5kw stage II Paving Range:1.8 - 4.5m Transport Weight:11000kg maximum laydown rate:240t/h Size:6260 x 3000 x 3750	 RP405 Engine Cummins 55kw stage II Paving Range:1.8 - 4.5m Transport Weight:11.6t maximum laydown rate:400t/h Size:6205 x 1900 x 3665/2090	 RP505 Engine Cummins 85kw stage II Paving Range:1.8 - 5m Transport Weight:12.5t maximum laydown rate:400t/h Size:5820 x 2000 x 3690	 RP603 Engine Cummins 129kw stage II Paving Range:2.5 - 7.25m Transport Weight:19000kg maximum laydown rate:500t/h Size:6660 x 2500 x 4000	 RP603L Engine ShangChai 163kw stage II Paving Range:2.5 - 6m Transport Weight:16500kg maximum laydown rate:400t/h Size:6860 x 2600 x 4000	 RP603 Engine ShangChai 146kw stage II Paving Range:3.0 - 8.15m Transport Weight:23800kg maximum laydown rate:700t/h Size:7048 x 3000 x 3160	 RP605 Engine Cummins 183kw stage II Paving Range:1.8 - 6m Transport Weight:12.5t maximum laydown rate:400t/h Size:6188 x 2395 x 3890 (3290)
 RP705 Engine Cummins 119kw stage II Paving Range:1.8 - 7m Transport Weight:19t maximum laydown rate:400t/h Size:5990 x 2500 x 2995	 RP903 Engine ShangChai 162kw stage II Paving Range:3.0 - 9.15m Transport Weight:26000kg maximum laydown rate:900t/h Size:7180 x 3000 x 4060	 RP953 Engine ShangChai 162kw stage II Paving Range:2.5 - 13.5m Transport Weight:31500kg maximum laydown rate:900t/h Size:6900 x 2780 x 4060	 RP1253T Engine ShangChai 243kw stage II Paving Range:3.0 - 12.5m Transport Weight:36800kg maximum laydown rate:1200t/h Size:6880 x 3000 x 4070	 RP1003T Engine: Shangchai Paving Range:1.8 - 10m Transport Weight:12.5t maximum laydown rate:400t/h Size:6880 x 2720 x 4060 (3195)	 RP1655T Engine Weichai 216kw stage II Paving Range:3 - 16.5m Transport Weight:48t maximum laydown rate:1500t/h Size:7270 x 3175 x 4200	 RP1855T Engine Weichai 318kw stage II Paving Range:3 - 18.5m Transport Weight:58t maximum laydown rate:1500t/h Size:7270 x 3175 x 4200	 RP2405 Engine: Weichai Paving Range:1.8 - 24m Transport Weight:33.5t maximum laydown rate:400t/h Size:8220 x 3175 x 4200 (3450)

COLD PLANER

 XM200KH Rated Power:571kW 420hp Operating Weight:33000kg Max Milling Width:2200mm Max Milling Depth:200mm Machine:1600 x 2500 x 3100mm	 XM400S Rated Power:81kW 109hp Operating Weight:5200kg Max Milling Width:400mm Max Milling Depth:120mm Machine:2050 x 1470 x 2000mm	 XM400SS Rated Power:81kW 109hp Operating Weight:5200kg Max Milling Width:400mm Max Milling Depth:120mm Machine:2050 x 1470 x 2000mm	 XM503K Rated Power:103kW 137hp Operating Weight:7500kg Max Milling Width:500mm Max Milling Depth:210mm Machine:6276 x 1828 x 2000mm	 XM505 Rated Power:32kW 123hp 2200rpm Operating Weight:5100kg Max Milling Width:500mm Max Milling Depth:180mm Size:3125 x 1715 x 2200mm	 XM505K Rated Power:32kW 123hp 2200rpm Operating Weight:5100kg Max Milling Width:500mm Max Milling Depth:180mm Size:3125 x 1715 x 2200mm	 XM1005H Rated Power:166kW 218hp Operating Weight:12000kg Max Milling Width:1200mm Max Milling Depth:120mm Machine:480 x 229 x 2600mm	 XM1005K Rated Power:163kW 211hp Operating Weight:14000kg Max Milling Width:1000mm Max Milling Depth:200mm Machine:685 x 230 x 2720mm
 XM1005F (tire) Rated Power:184kW 240hp Operating Weight:35000kg Max Milling Width:1900mm Max Milling Depth:200mm Machine:5100 x 2010 x 2900mm	 XM1005F (crawler) Rated Power:184kW 240hp Operating Weight:35000kg Max Milling Width:1900mm Max Milling Depth:200mm Machine:5100 x 2010 x 2900mm	 XM1205F Rated Power:102kW 261hp 2200rpm Operating Weight:22000kg Max Milling Width:1200mm Max Milling Depth:200mm Machine:3950 x 2180 x 3000mm	 XM1305K Rated Power:32kW 123hp 2200rpm Operating Weight:15400kg Max Milling Width:1200mm Max Milling Depth:200mm Size:3320 x 1820 x 2300mm	 XM1305F Rated Power:206kW 275hp Operating Weight:22000kg Max Milling Width:1200mm Max Milling Depth:200mm Machine:12700 x 2230 x 3000mm	 XM2005 Rated Power:410kW 567hp Operating Weight:39500kg Max Milling Width:2000mm Max Milling Depth:320mm Machine:12097 x 2500 x 3000mm	 XM2005K Rated Power:447kW 599hp Operating Weight:39500kg Max Milling Width:2000mm Max Milling Depth:320mm Machine:12097 x 2500 x 3000mm	 XM2005S Rated Power:470kW 2100rpm Operating Weight:32000kg Max Milling Width:2000mm Max Milling Depth:320mm Size:12097 x 2500 x 3000mm

STABILIZERS, RECYCLER

 XLZ2103S Rated Power:35.8kW 48hp 2100rpm Operating Weight:21000kg Max Milling Width:2100mm/2300mm Max Milling Depth:400mm Size:9232 x 3162 x 3400mm	 XLZ2103SP Rated Power:39.6kW 53hp 2300rpm Operating Weight:26500kg Max Milling Width:2300mm Max Milling Depth:400mm Size:9232 x 3262 x 3450mm	 XLZ2303SP Rated Power:59.6kW 80hp 2300rpm Operating Weight:27500kg Max Milling Width:2300mm Max Milling Depth:400mm Size: 9230X325X3450mm	 XL2103 Rated Power:254kW 340hp 1900rpm Operating Weight:15400kg Max Milling Width:2100mm Max Milling Depth:400mm Size:8740 x 2705 x 3400mm	 XL2503 Rated Power:316kW 423hp 1900rpm Operating Weight:16500kg Max Milling Width:2300mm Max Milling Depth:320mm Size:8740 x 3080 x 3400mm	 XLZ2303K Rated Power:51kW 72hp Operating Weight:25500kg Max Milling Width:2300mm Max Milling Depth:300mm Size:9340 x 3218 x 3197mm	 XLZ2305K Rated Power:571kW 761hp Operating Weight:32000kg Max Milling Width:2300mm Max Milling Depth:300mm Size:9340 x 3218 x 3197mm
---	--	--	---	---	--	---

TRUCK-MOUNTED INTELLIGENT ASPHALT DISTRIBUTOR

 XLS403 Rated Power: 115kW 154HP 2800rpm Transport Weight: 7300kg Asphalt Spraying Width: 4000mm Dimensions(L x W x H): 7910 x 2190 x 2515mm	 XLS603 Rated Power: 125kW 170HP 2600rpm Transport Weight: 9018kg Asphalt Spraying Width: 4000mm Dimensions(L x W x H): 8058X2350X2900mm	 XLS803 Rated Power: 206kW 276HP 2300rpm Transport Weight: 12800kg Asphalt Spraying Width: 6000mm Dimensions(L x W x H): 9275X2490X3350mm	 XLS1203 Rated Power: 228kW 306HP 1900rpm Transport Weight: 17790kg Asphalt Spraying Width: 6000mm Dimensions(L x W x H): 10330 x 2500 x 3220mm
--	---	--	--

ROAD MAINTENANCE TRUCK

 XLY053TB Rated Power:115kw Generator:22kW Transport Weight:8250kg Dimensions(L x W x H): 8600 x 2340 x 2950mm	 XLY103TB Rated Power:185kw Superstructure:45kW Carrier:206kw 276hp Generator:12kW Transport Weight:13750kg Dimensions(L x W x H): 8175 x 2495 x 3440mm	 XLY103TC Rated Power: 165kW 221hp 2300rpm Hot Bitumen Tank Capacity: 40L Transport Weight:1705kg Total Weight:18000kg Dimensions(L x W x H): 8900 x 2500 x 3460mm
--	--	--

STABILIZED SOIL MIXING PLANT

 XC300 Total Installed Power: 90kW Production Capacity:300t/h Area:44 x 14m²	 XC400 Total Installed Power: 167kW Production Capacity:400t/h Area:48 x 14m²	 XC500 Total Installed Power: 179kW Production Capacity:500t/h Area:48 x 14m²	 XC600 Total Installed Power: 181kW Production Capacity:600t/h Area:51 x 14m²
 XC700 Total Installed Power: 164kW Production Capacity:700t/h Area:51 x 14m²	 XC800 Total Installed Power: 222kW Production Capacity:800t/h Area:52 x 14m²	 XC600S Total Installed Power: 243kW Production Capacity:600t/h Area:50 x 14m²	 XC700S Total Installed Power: 247kW Production Capacity:700t/h Area:55 x 14m²
 XC800S Total Installed Power: 308kW Production Capacity:800t/h Area:60 x 14m²	 XC1000S Total Installed Power: 369kW Production Capacity:1000t/h Area:64 x 18m²		

SANITARY ENGINEERING EQUIPMENT

COMPLETE SET OF GARBAGE COLLECTION AND TRANSFER EQUIPMENT

 XGH5070ZYSD6 Curb Weight:5200kg Rated Payload:1873/1920kg Dustbin Volume:8m³ Vehicle Model: 6850/6620x1920x2315mm	 XGH5120ZYSD6 Curb Weight:8900kg Rated Payload:3295/3460kg Dustbin Volume:15m³ Vehicle Model: 8150/7798/7930x2500x2990mm	 XGH5180ZYSD6 Curb Weight:10000kg Rated Payload:3690/3850kg Dustbin Volume:12.5m³ Vehicle Model: 8890/8375/8570x2500x3000mm	 XZJ5250ZYSD6 Curb Weight:14400kg Rated Payload:19420/19390kg Dustbin Volume:15m³ Vehicle Model: 19575/19205x2520x3380mm	 XGH5031ZXXA6 Curb Weight:14800kg Rated Payload:1885kg Max. Lifting Capacity:1500kg Vehicle Model: 4525x1600x1935mm	 XGH5070ZXQ6 Curb Weight:6130kg Rated Payload:3670/3830kg Max. Lifting Capacity:3000kg Vehicle Model: 4850x1920x2200mm	 XGH5180ZXXD6 Curb Weight:7600kg Rated Payload:19270/19205kg Max. Lifting Capacity:14000kg Vehicle Model: 7340/7370x2490x3070mm
--	---	--	---	--	--	--

COMPLETE SET OF ROAD-CLEANING EQUIPMENT

 XGH5250ZXQ6 Curb Weight:11190kg Rated Payload:13770/13795kg Max. Lifting Capacity:2000kg Vehicle Model: 8480x2520x3170mm	 XGH5120ZJD6 Curb Weight:7250/7400kg Rated Payload:5170/5040/4980/4895kg Dustbin Volume:14.4/13.5m³ Vehicle Model: 8520/8550x2500/2530x3060mm	 XGH5070TCAQ6 Curb Weight: 7250/7400kg Rated Payload: 5170/5040/4980/4895kg Dustbin Volume:14.4/13.5m³ Vehicle Model: 8520/8550x2500/2530x3060mm	 XGH5160TSLD6 Curb Weight:8500kg Rated Payload:1020/1220/12170/12470kg Dustbin Volume:5.2m³ Vehicle Model: 5640x2030x2800mm	 XGA5250D2WCSS Drive Type:4 x 2/6 x 4 Engine: 90-430HP Transmission:9 Tank Volume: 5/10/15/20m³	 XGA5250D3WCSS Drive Type:4 x 2/6 x 4 Engine: 90-430HP Transmission:9 Tank Volume: 5/10/15/20m³	 XGA5250D5WCSS Drive Type:4 x 2/6 x 4 Engine: 90-430HP Transmission:9 Tank Volume: 5/10/15/20m³
 XGH5070TXSQ6 Curb Weight:5520kg Dustbin Volume:2m³ Water Tank Volume:4m³ Vehicle Model: 6220x2190x2720mm	 SJDH700A Curb Weight:1000kg Dustbin Volume:700L Water Tank Volume:180L Vehicle Model: 3720x1260x2050mm	 XGH5160TXSD6 Curb Weight:8700kg Dustbin Volume:4.5m³ Water Tank Volume:8m³ Vehicle Model: 7840x2510x3170mm	 XGH5030TYHA6 Curb Weight:1700kg Rated Payload:1910kg Water Tank Volume:1.7m³ Vehicle Model: 5850x1580x2050mm	 DXA5251TDYD6 Curb Weight:13650/13110/14160kg Rated Payload: 11195/11695/11625/11765/11710kg Water Tank Volume:11.18m³ Vehicle Model: 10895/11925 x 2525 x 3730/3830mm	 DXA5161GPSD6 Curb Weight:6130kg Rated Payload:9575kg Water Tank Volume:10.3m³ Vehicle Model:7430x2520x2860mm	 DXA5180GQXD6 Curb Weight:7600kg Rated Payload:9470kg Spray Water Cleaning Width: 2.5-3.5m Water Tank Volume:9.8m³ Vehicle Model: 8223/8823/9240x2520x2920mm

COMPLETE SET OF ICE BREAKING AND SNOW REMOVAL EQUIPMENT

 DXA5250GQXD6 Curb Weight:12500kg Spray Water Cleaning Width: 2.5-3.5m Water Tank Volume:12.8m³ Vehicle Model: 16520x2550x3190mm	 XSR360 Clearing Snow Thickness: <150mm Vehicle Model:4000x2390x1385mm	 XSR330 Clearing Snow Thickness: <150mm Vehicle Model:3730x2390x1385mm	 SRC36 Max. Snow Pushing Width:3600mm Total Weight:3300kg Vehicle Model:3750 x 2500 x 1845mm	 XCD32 Max. Snow Pushing Width: 3200mm Total Weight:1900kg Vehicle Model:3290x1905x1865mm	 SBJ12B Bin Volume:12m³ Load Center:1200mm Total Weight:4000kg Vehicle Model:6370x2130x2000mm	 PX90Z Max. Snow Dumping Thickness:1900mm Max. Snow Throwing Distance:30m Total Weight:4000kg Vehicle Model:2920x2790x4200mm
--	---	---	--	---	---	---

COMPLETE SET OF UNDERGROUND PIPE NETWORK MAINTENANCE EQUIPMENT

 XGH5250CTXD6 Curb Weight:16800kg Vehicle Model: 10607/10760/11290/10806x2500/2530x3716mm	 XGH5251CTXD6 Curb Weight:18900kg Vehicle Model: 13965/15240/11775/11540x2520x3430/3510/3580/3680mm	 DXA5120GXWD6 Curb Weight:5410kg Rated Payload:6190kg Tank Volume:8.1m³ Vehicle Model: 6890x2160x3078mm	 DXA5180GXWD6 Curb Weight:8950kg Rated Payload:8800kg Tank Volume:11.5m³ Vehicle Model: 7855x2490x3425mm	 XZJ5250TXXZ6 Curb Weight:20640kg Rated Payload:4620kg Tank Volume:5.7m³ Vehicle Model: 19560x2520x3850mm
---	--	--	---	--

PORT MACHINERY

CONTAINER REACH STACKER

 XC54531K Rated lifting capacity: 45t Number of Stacking: 5-4-3 Rated power: 265/210kW/1rpm	 XC51009K Rated lifting capacity: 10t Number of Stacking: 5 (9'6")-5(8'6")-4(8'6") Rated power: 164/238kW/1rpm
--	---

EMPTY CONTAINER HANDLER

 XCH907K Maximum lifting capacity: 9 t Number of Stacking: 7 (8'6") Rated power: 185 kW/2200rpm	 XCH908K Maximum lifting capacity: 9 t Number of Stacking: 8 (8'6") Rated power: 185 kW/2200rpm
---	---

TELEHANDLER

 XTF12010K Rated lifting capacity:12t Load Center:800mm Max. Lifting Height:9.62m Rated power: 129kW/2200rpm	 XTF23010K Rated lifting capacity:23t Load Center:900mm Max. Lifting Height:9.66m Rated power: 142kW/2200rpm
--	---

FORKLIFT

 XCF1612K/1606K Rated lifting capacity:16t Load Center:1200/900mm Max. Lifting Height:4000mm Rated power: 142kW/2300rpm	 XCF2512K Rated lifting capacity:25t Load Center:1200mm Max. Lifting Height:4000mm Rated power: 184kW/2200rpm	 XCF3512K Rated lifting capacity:35t Load Center:1200mm Max. Lifting Height:4000mm Rated power: 184kW/2200rpm
--	--	--