CECOCECO

A -

r

2 r

P

A gt g gt g

A

A

A t

A RbR- RbR-

Y -

A P

r

RbR- RbR-

V

- b

A

RbR- RbR-

A -

O r

2

A 9

2bV

r

Y

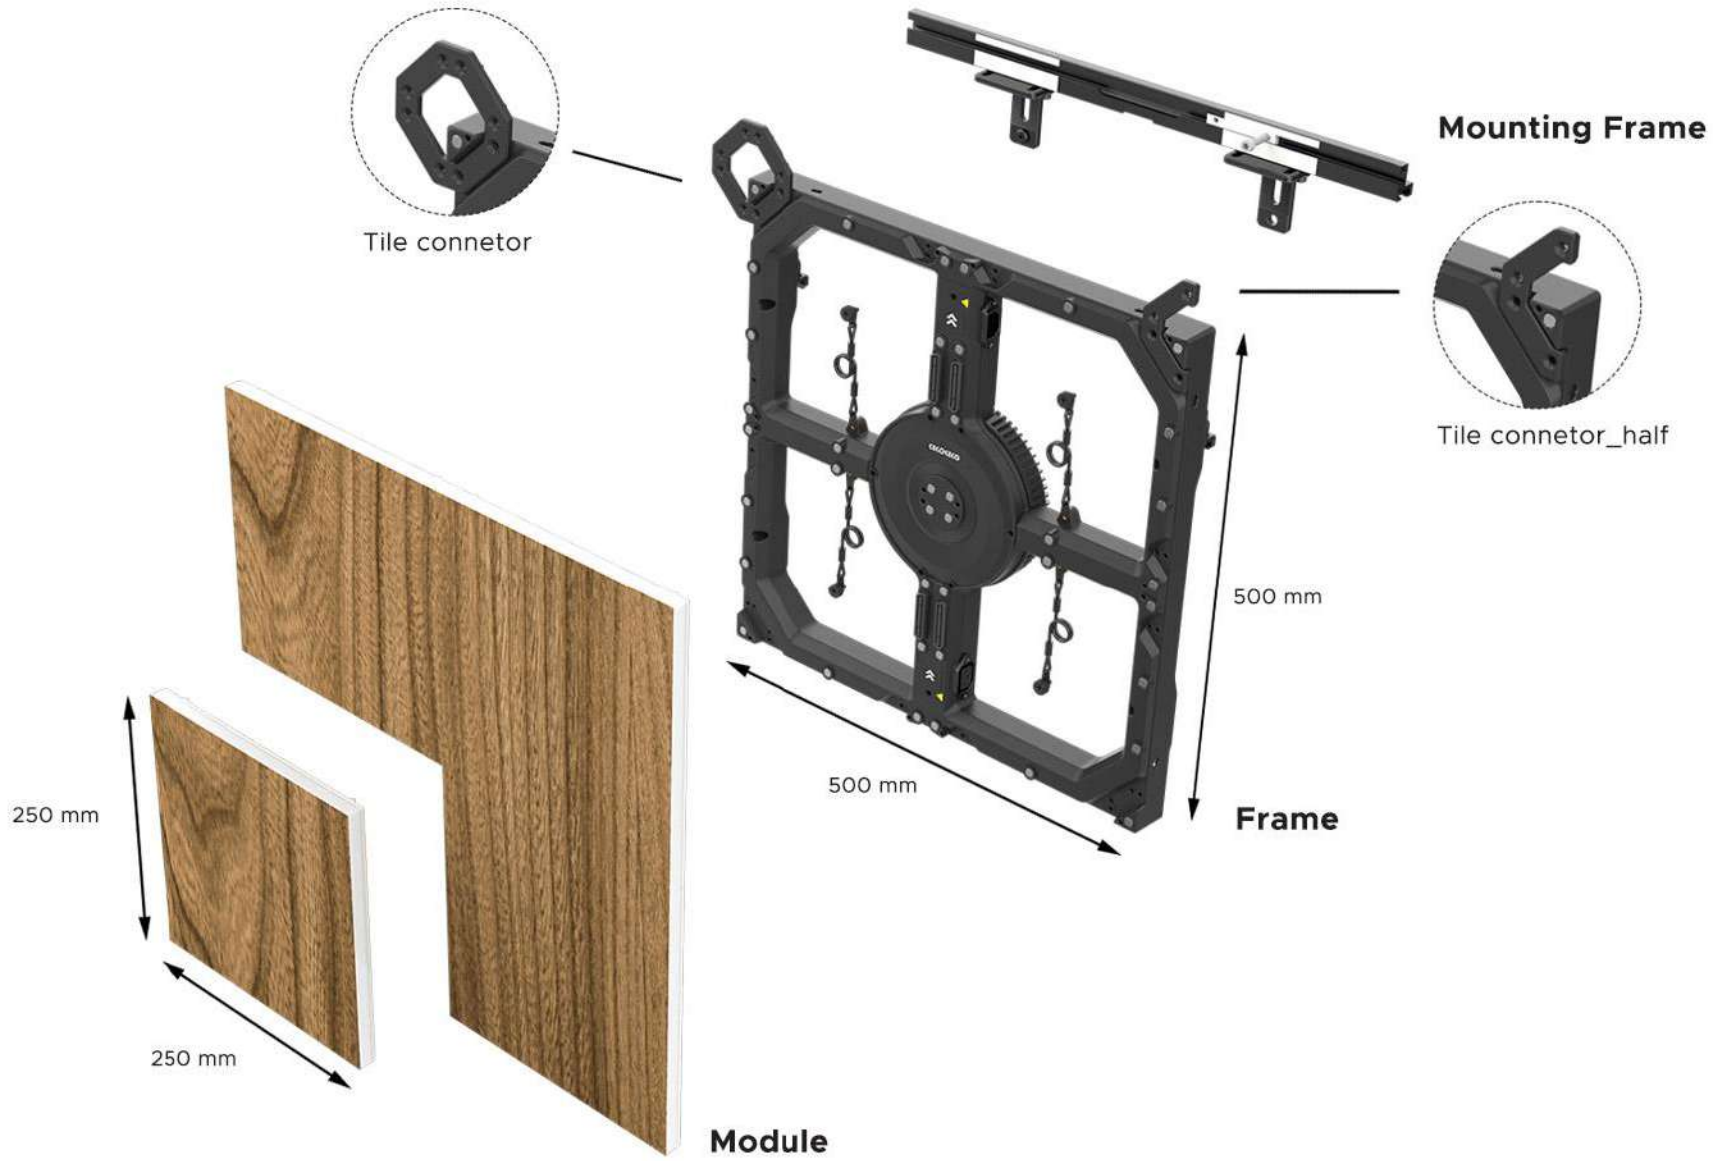
Tile connetor
Mounting Frame
Tile connetor_half
500 mm
500 mm
Frame
250 mm
250 mm
Module

o I

ArtMorph

P r -

R



R

A
2bV V

2
R

b r
9



r R

9

P

R

Wood collections

Stone collections

Textile collections



Metal collections

Y P

A 5YT T

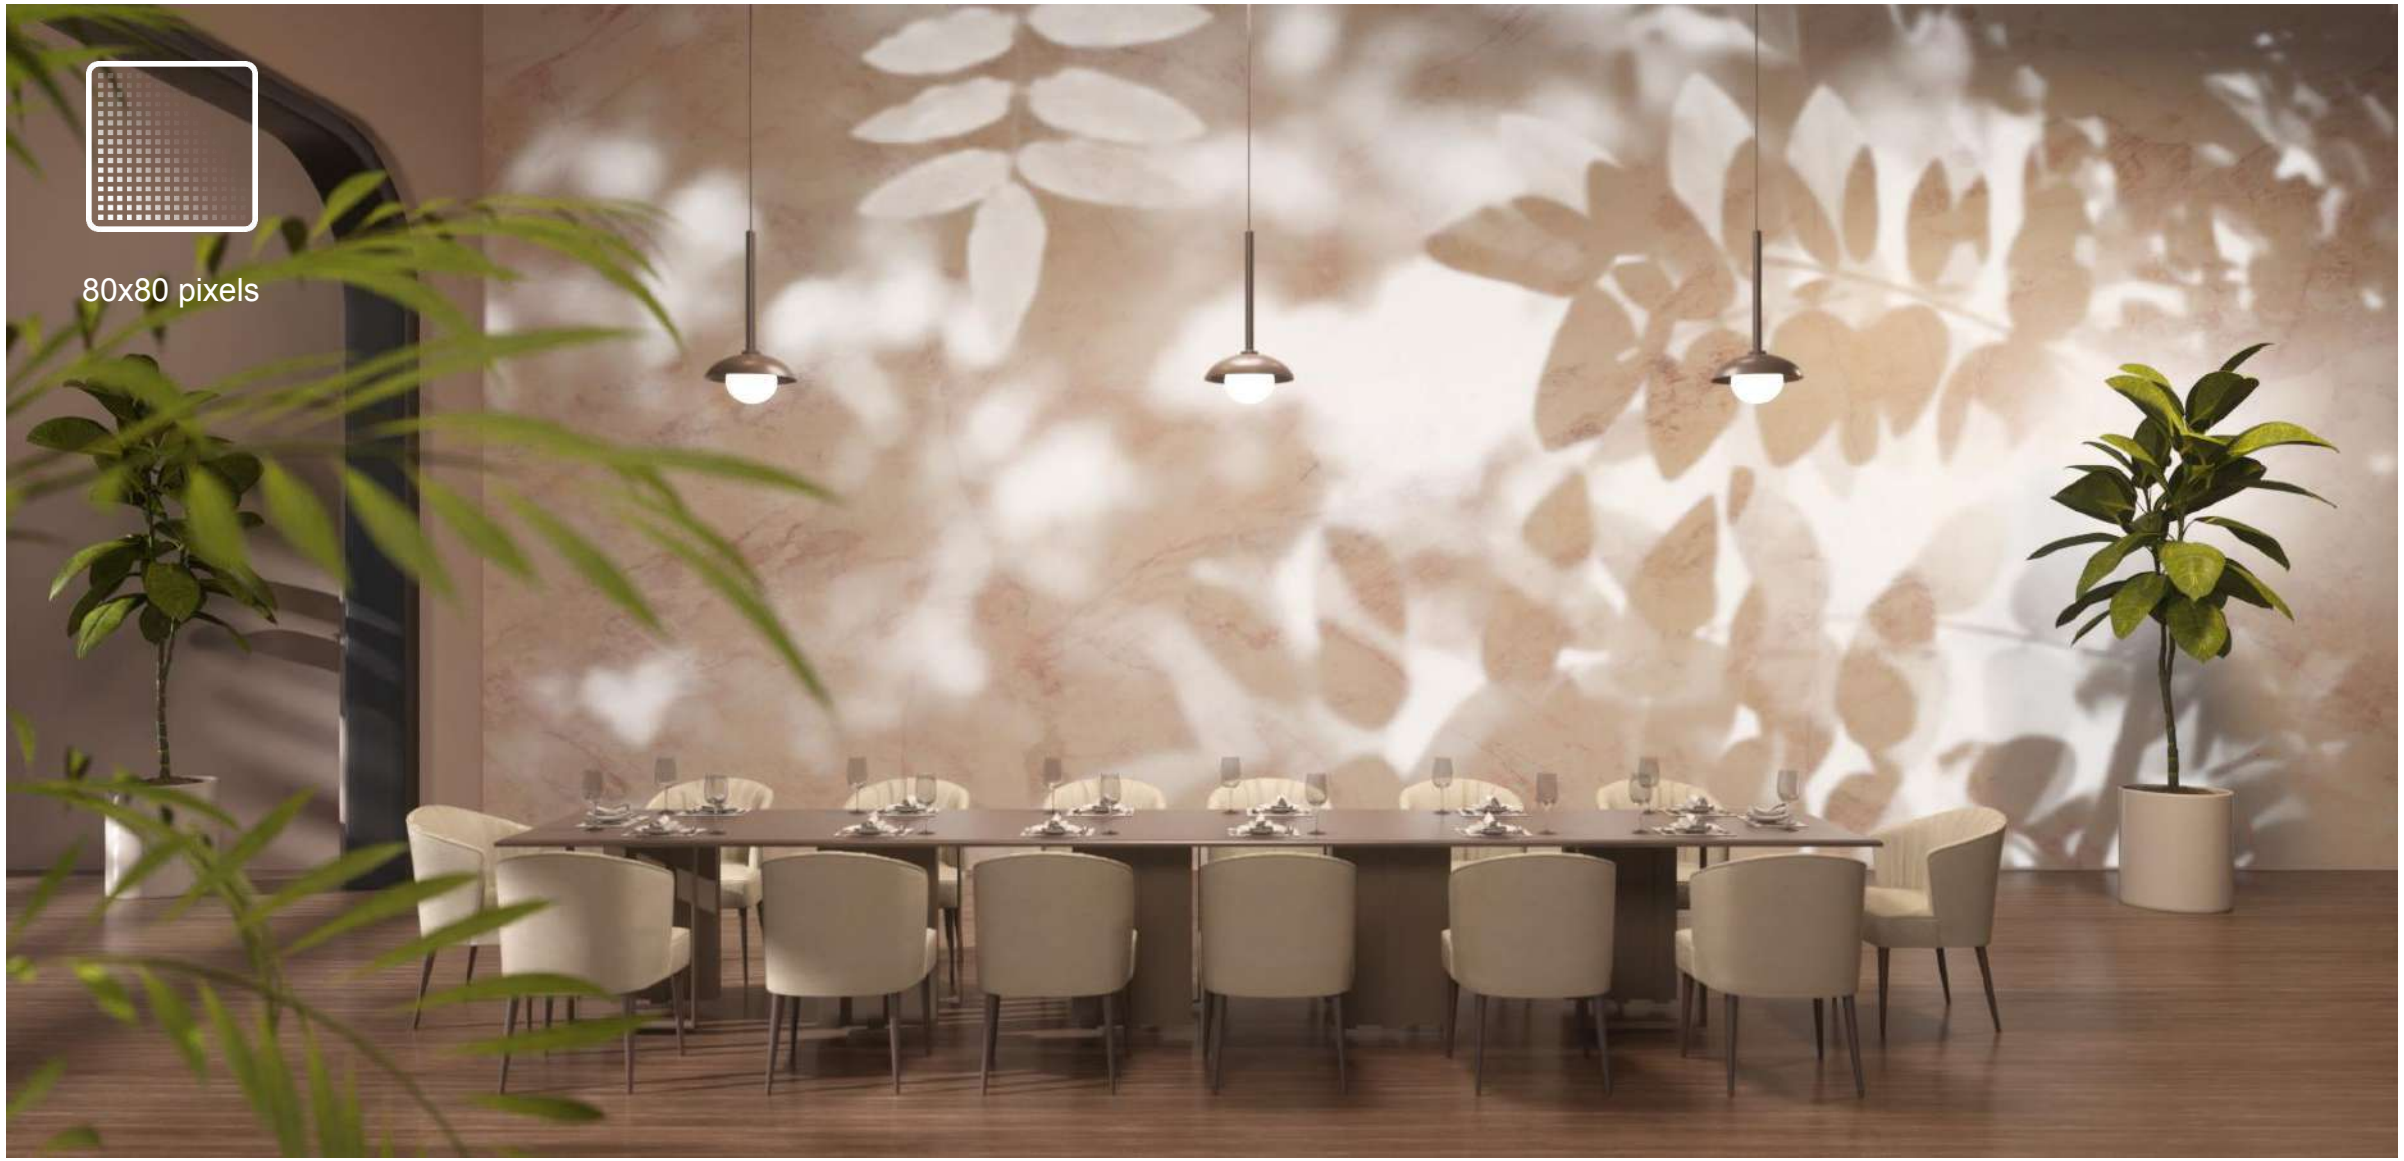

5 **P**

A 9

A 9

r

A 9

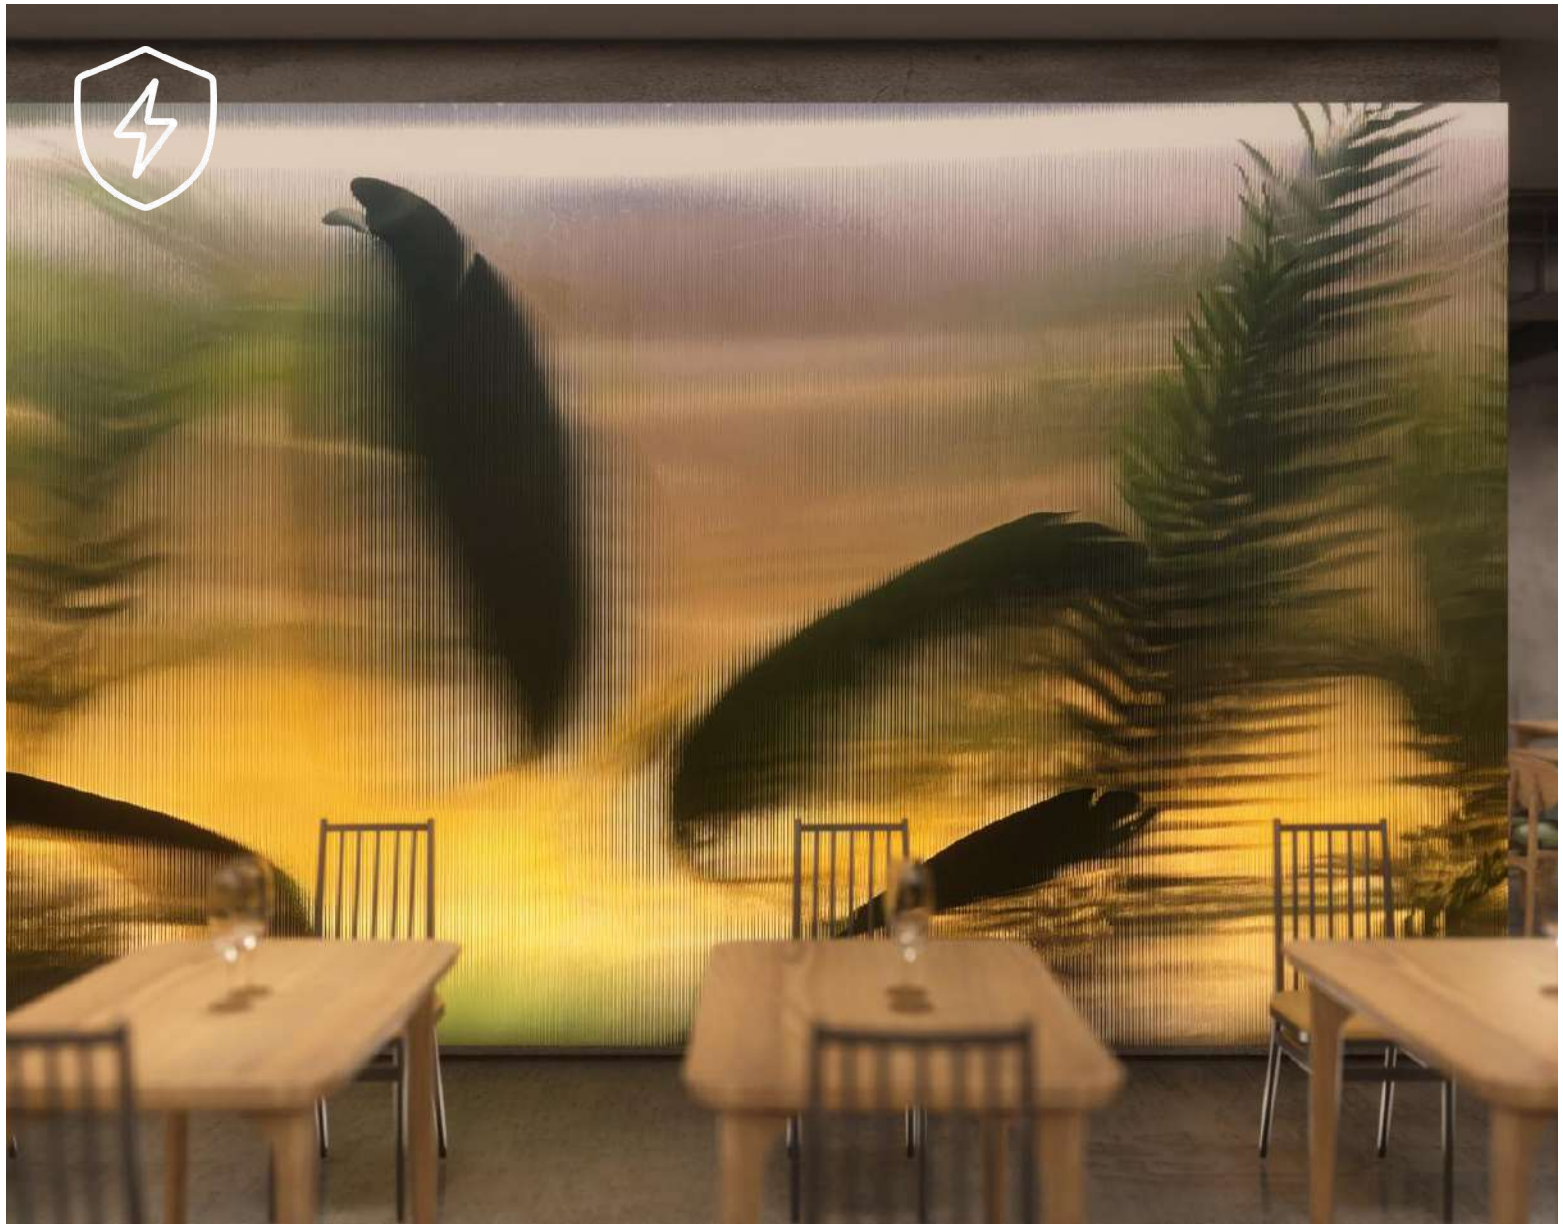

Y r -

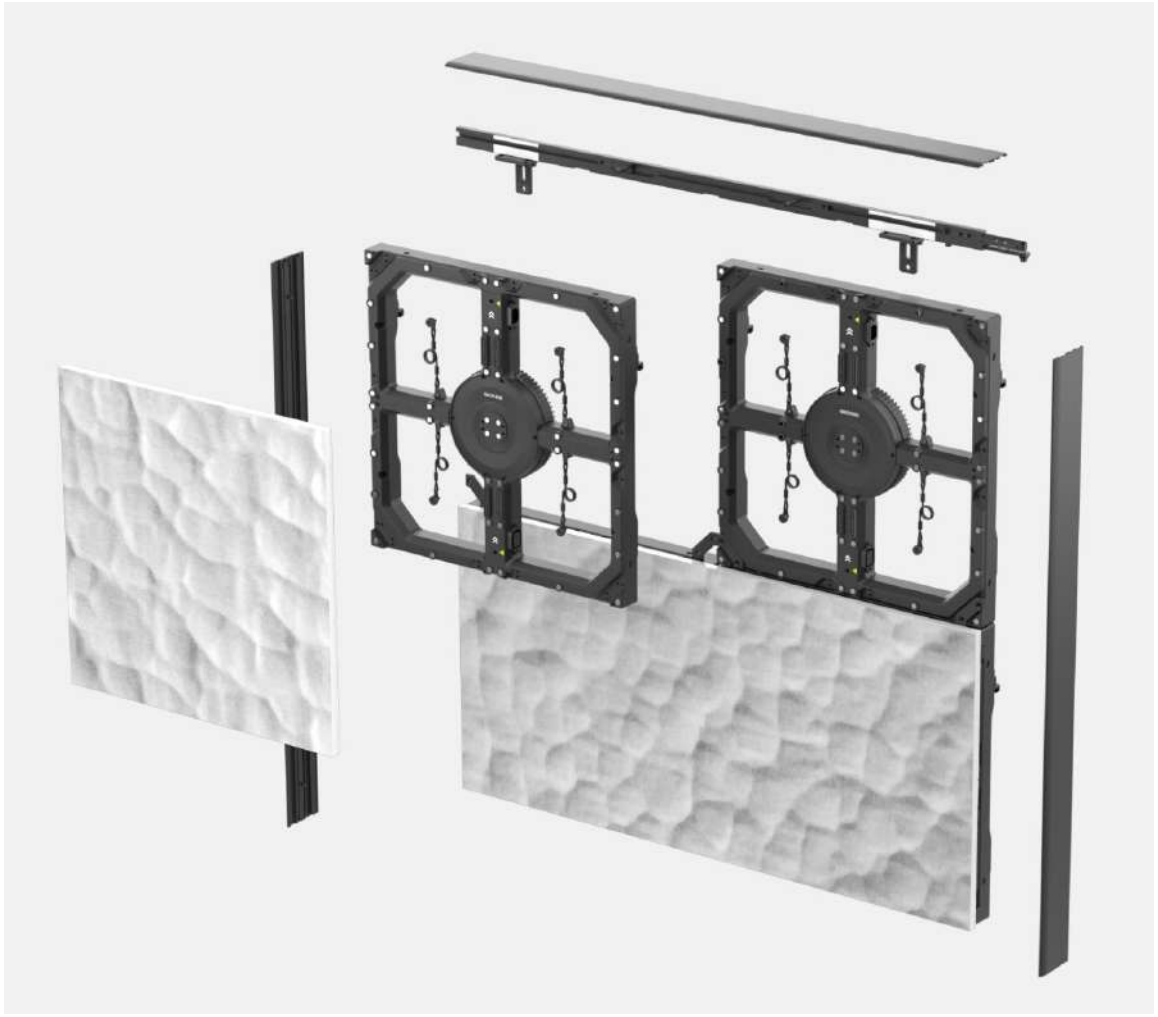

I A

r P

Y P

- m
-
-

P T A

b

- V qV9rr
- 9

P A

O O -

A 9 - b

b

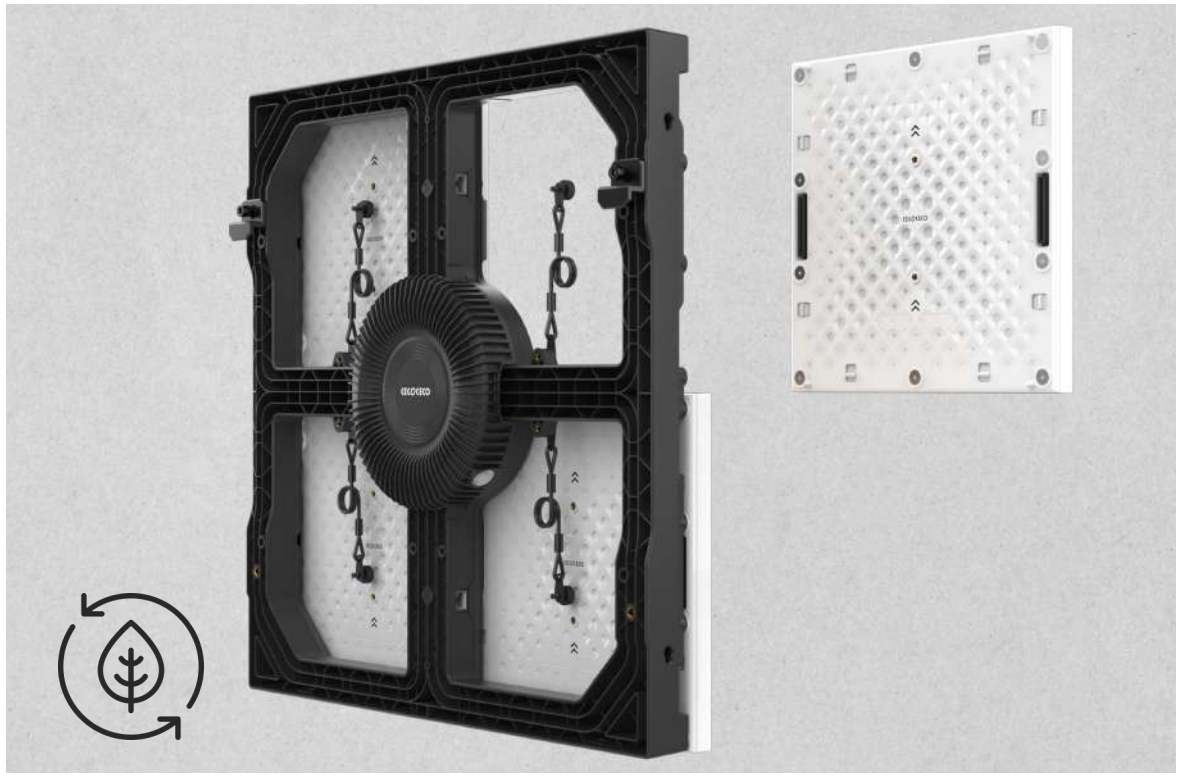

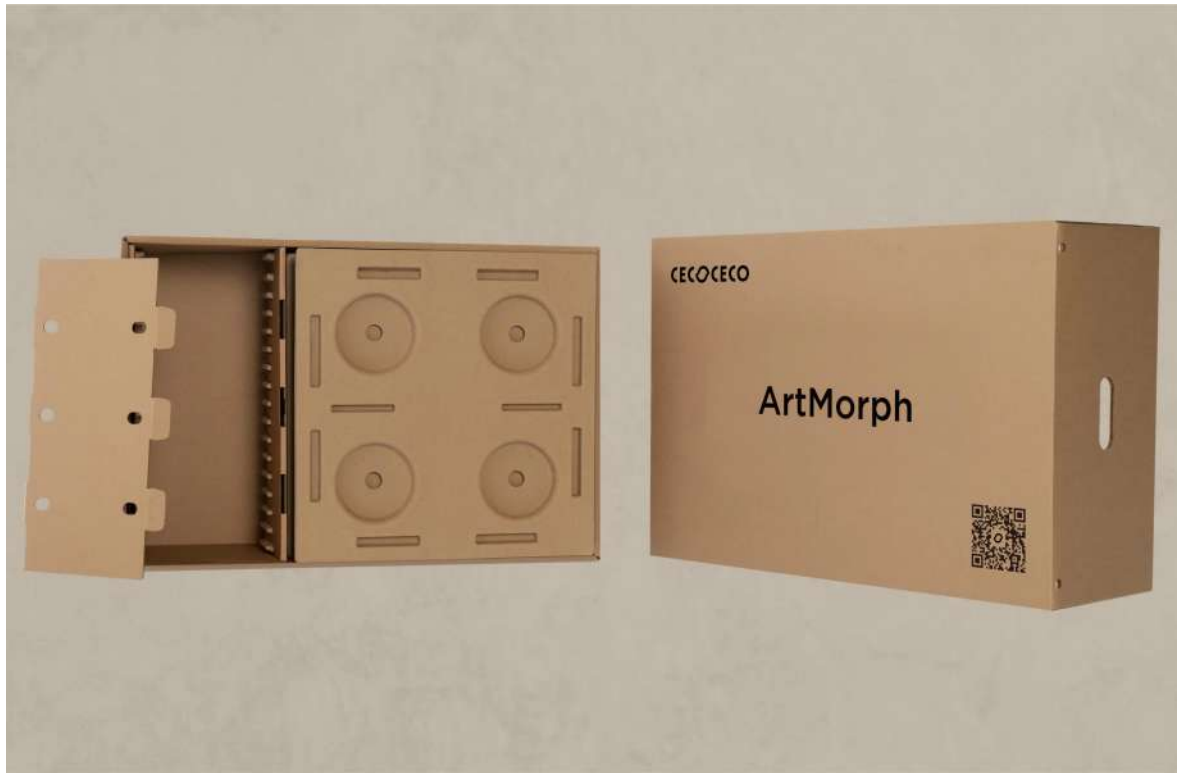

#SustainabilityMadeReal

5 **A**

2bV A 9

5
year

A

- q
-
- P
- m P
- R

Y
A -
Y
A 9 9 A 9 b
A 9

A - -

r

R A 9 9

A 9

m

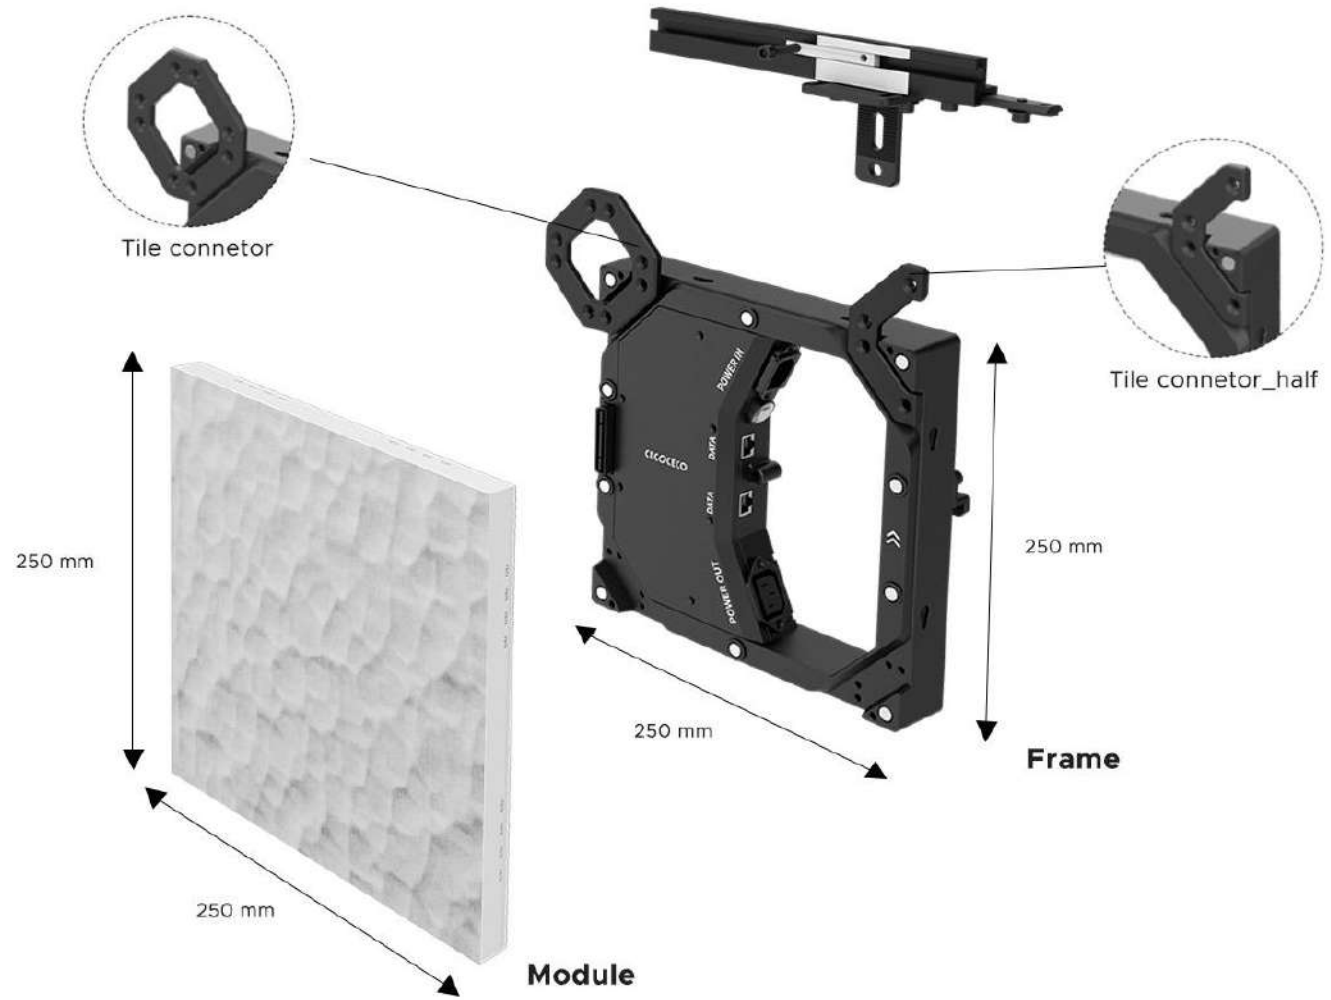
Tile connetor
Tile connetor_half
250 mm
250 mm
250 mm
250 mm
Module
Frame

r

A

A 9

p P

A 9

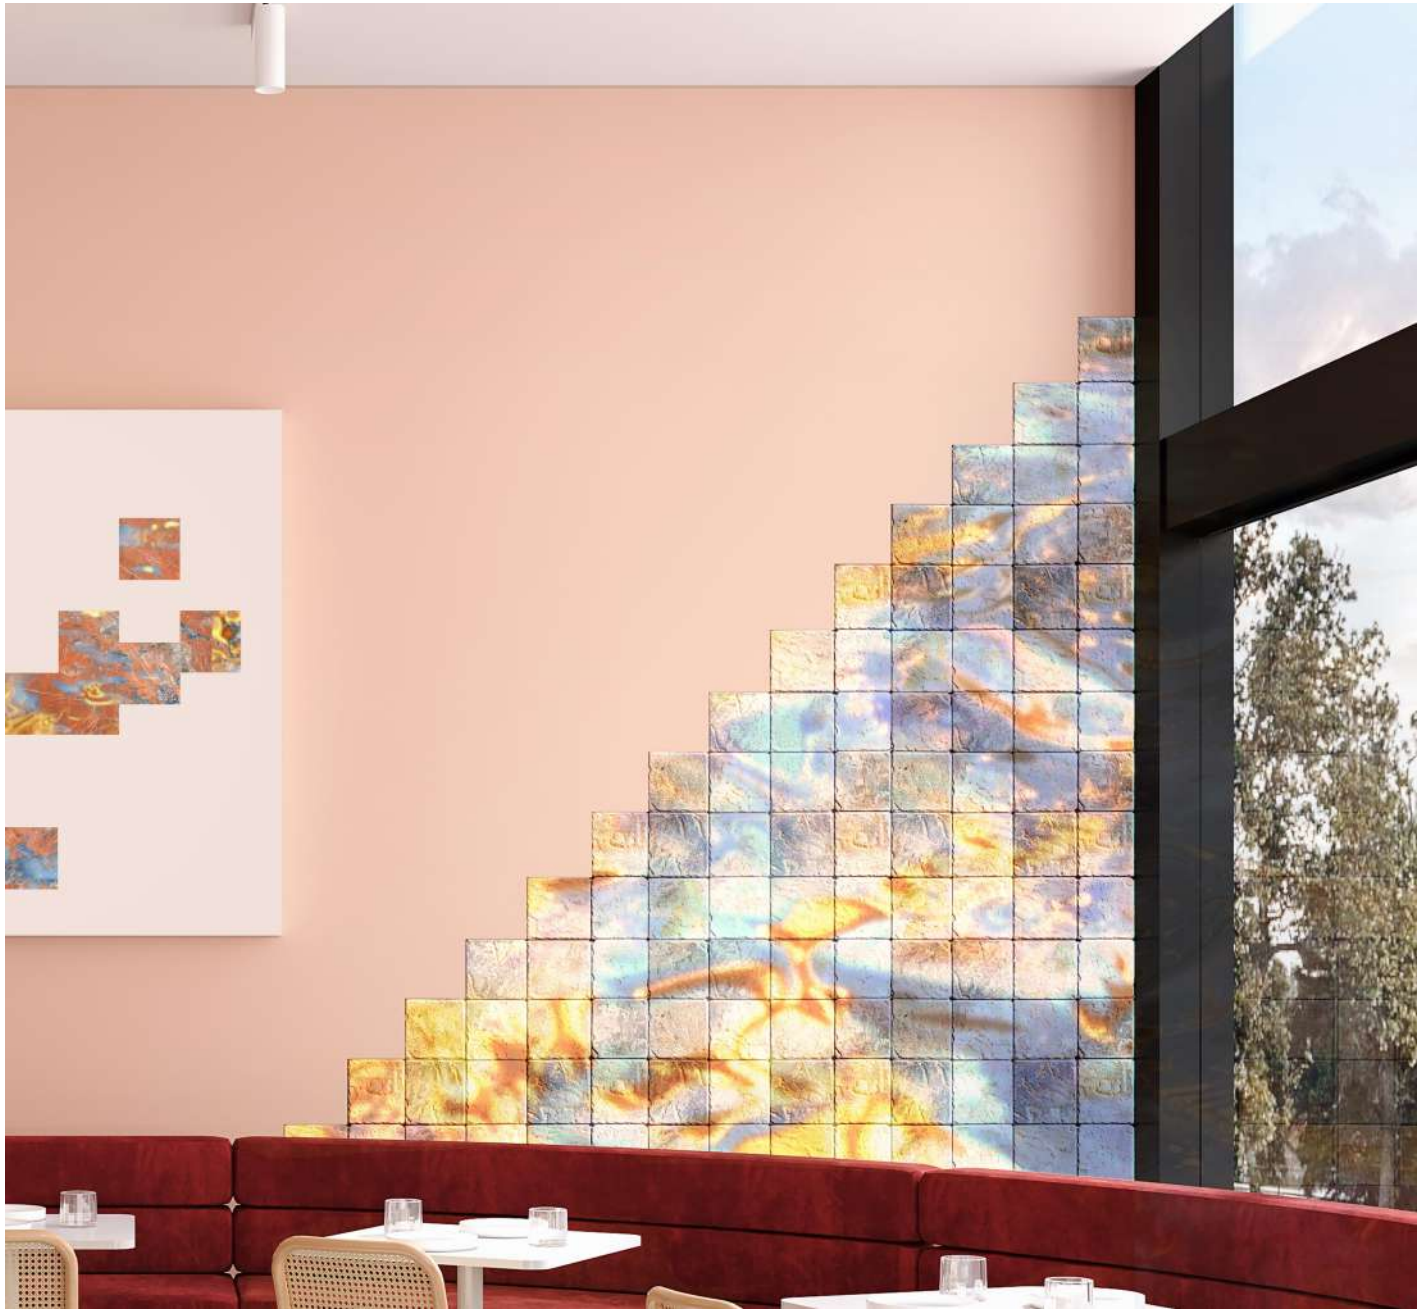

A

- R
- R A
-

A - Y

m b b R

A 9 b

P

P Y T

b °

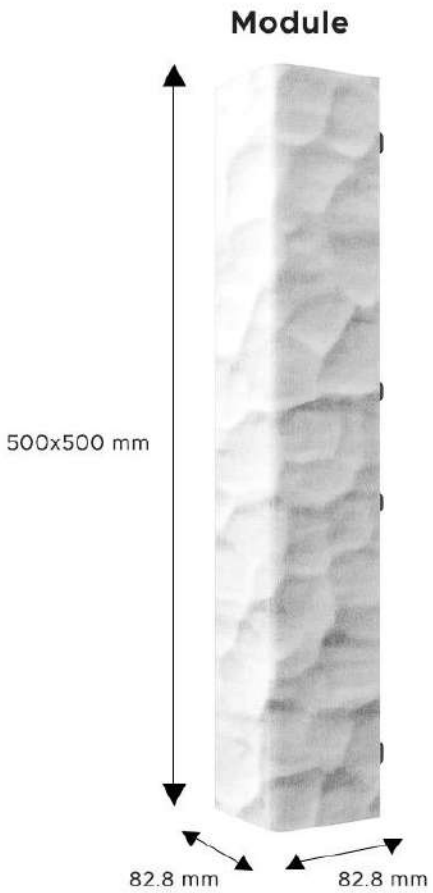
Module
500x500 mm
82.8 mm
82.8 mm

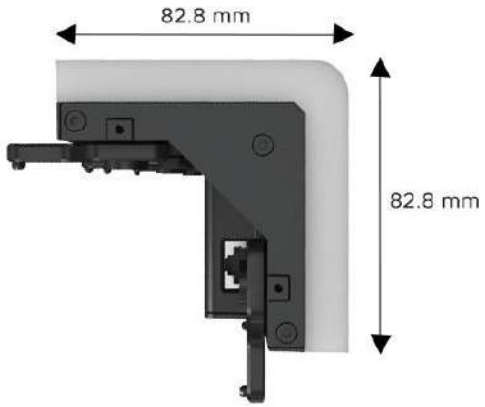
82.8 mm
82.8 mm

Frame
500x500 mm
82.8 mm
82.8 mm

Y

V

A 9

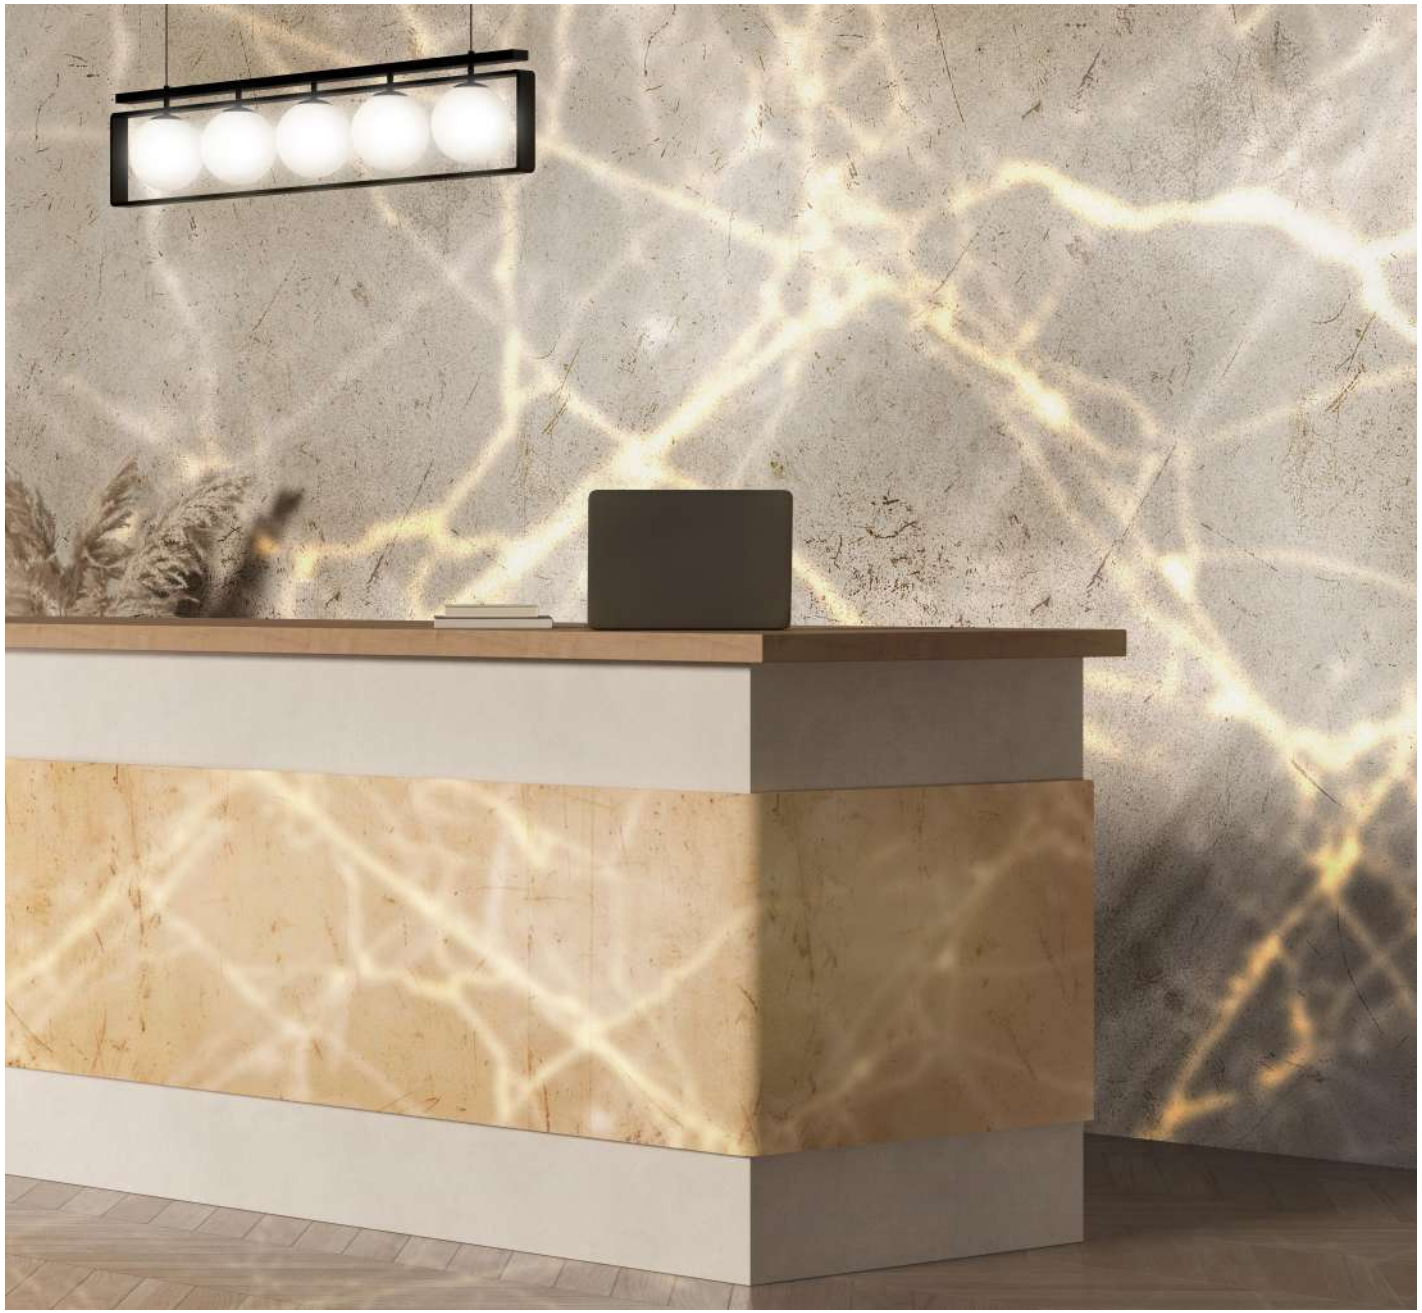

-

A 9 9

A

- b m
- R

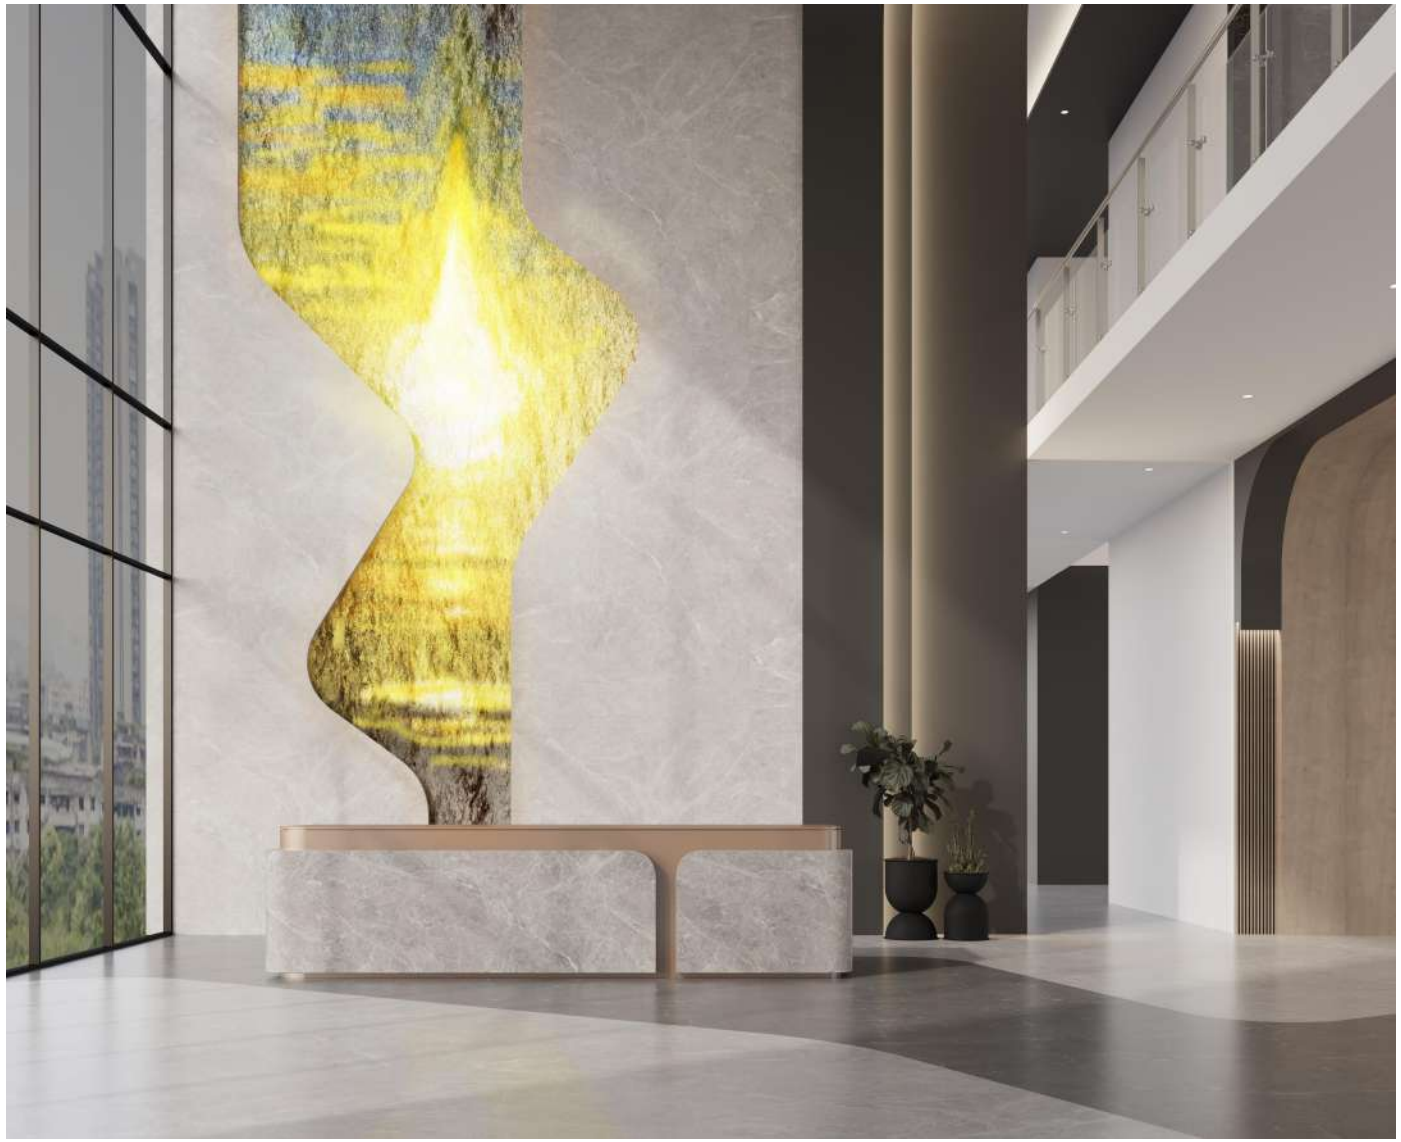

q 2

P

-

P

2

9 R

P

	ArtMorph	ArtMorph Mini	ArtMorph Edge
Module Size(WxHxD)	250x250x24.8 mm 9.84”x9.84”x0.97"	250x250x24.8 mm 9.84"x9.84"x0.97"	—
Tile Size(WxHxD)	500x500x77.8 mm 19.69”x19.69”x3.06”	250x250x77.8 mm 9.84"x9.84"x3.06"	82X82X500 mm 3.23"x3.23"x19.69"
Pixel/Tile	80x80 Pixel	40x40 Pixel	25x80 Pixel
Weight/Tile	7 kg	2.4 kg	1.6 kg
Max. Brightness(Nit or CD/m²)	4500 nits,no surface 700-1200 nits with surface-depending on the surface design		
Max. Power Consumption/m²	480 W		
Standby. Power Consumption/m²	10 W		
Operational Temp/Humidity	-20℃~45℃,10%~90% RH		
Storage Temp/Humidity	-40℃~60℃,10%~90% RH		
IP Rating (Front/Rear)	Indoor		

CECOCECO
b
A 9
R
@cecoceco.com