

HLINEAR

ACOUSTIC & TEXTURE

HLINEAR

BETTER LIGHTING , BETTER SERVICE

HLINEAR

Acoustic & Texture

- Attentive service •
- Quick response •
- Experienced projects •
- Various customizations •
- Designable app •
- Unlimited creativity •
- Valuable partnership •



ABOUT HLINEAR


HLINEAR, founded in 2017, is a forwardthinking lighting company that prides itself on innovative design and sustainability. At the core of our philosophy lies a commitment to creating LED fixtures that not only illuminate spaces but also enhance their acoustical comfort.

Our designs are a seamless blend of functionality and aesthetics, where LED lighting technology meets the acoustic benefits of sound-absorbing materials. We believe that lighting should not only be bright and efficient but also contribute to a healthier and more comfortable indoor environment. By integrating sound-absorbing cotton into our LED fixtures, we aim to reduce noise levels and create a more serene atmosphere in any given space.


Moreover, sustainability is a cornerstone of our operations. We strive to use eco-friendly materials and manufacturing processes, ensuring that our products have a minimal impact on the environment. Our LED lights are designed to be energy-efficient, lasting longer and consuming less power than traditional lighting solutions.

In essence, HLINEAR's vision is to revolutionize the lighting industry by offering innovative, environmentally friendly designs that enhance both visual and acoustical comfort. We believe that through our designs, we can create spaces that are not just brightly lit but also acoustically balanced, fostering a positive impact on people's well-being and productivity.


HLINEAR'S PROJECTS

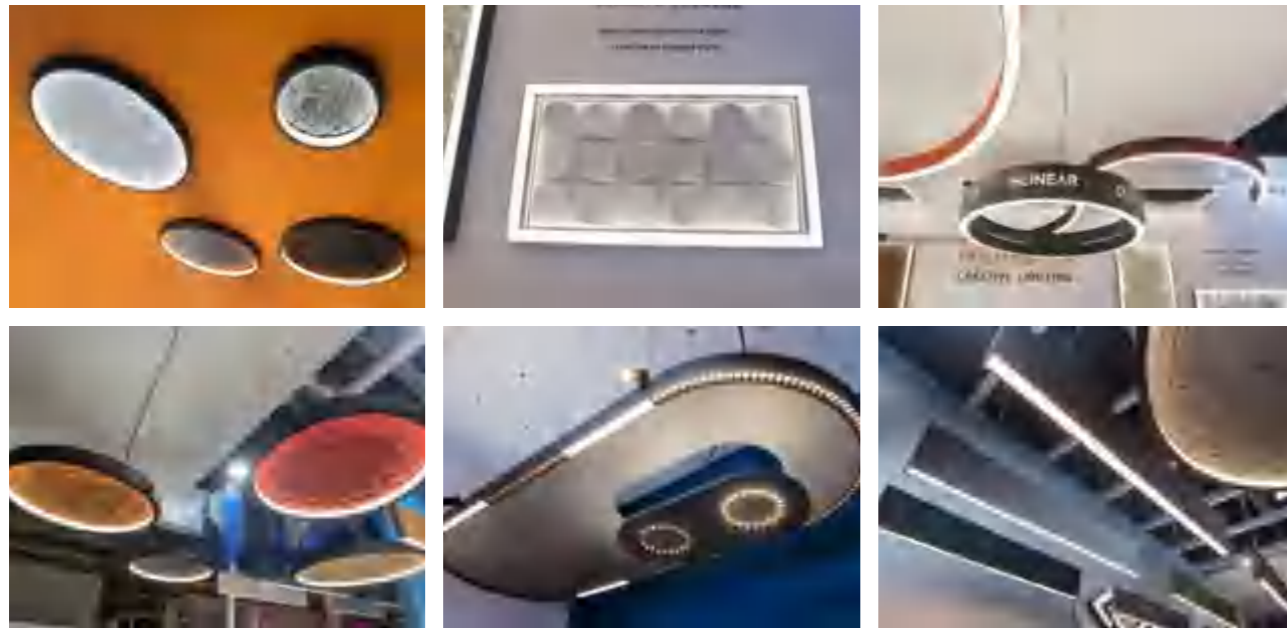


Acoustic & Texture series An extension of our product line seamlessly integrates 83 vibrant colors with HLINEAR's signature designs, enhancing and diversifying our product offerings.

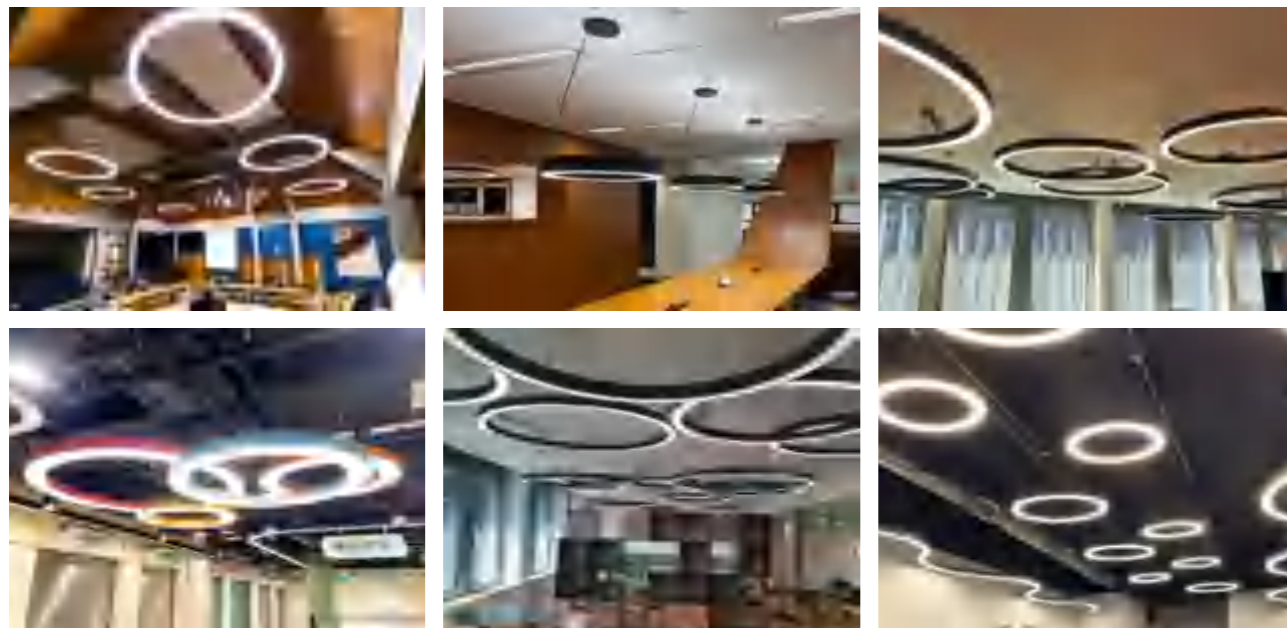

Circle series This is HLINEAR's most classic design series and a highly refined product, embodying the ultimate in simple artistic beauty.

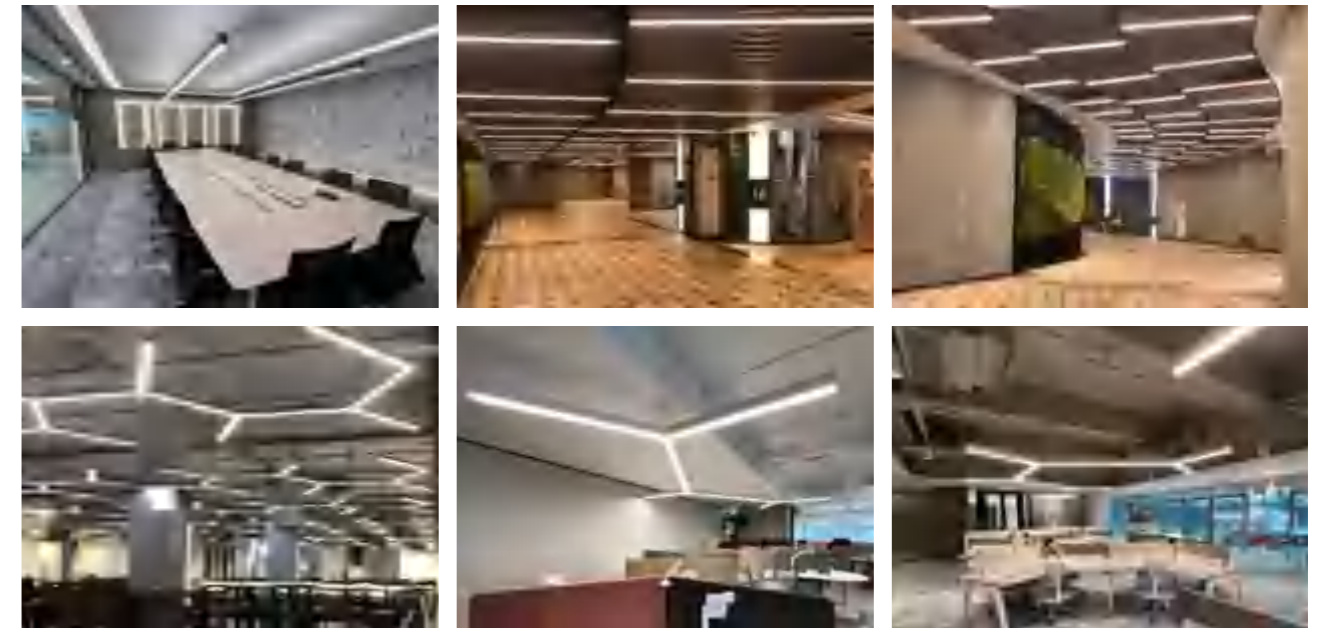

Linear series This series offers a variety of standard shapes with a fully customizable design, allowing you to create any desired shape to suit the space's requirements. Visual results can be previewed through the App demonstration.

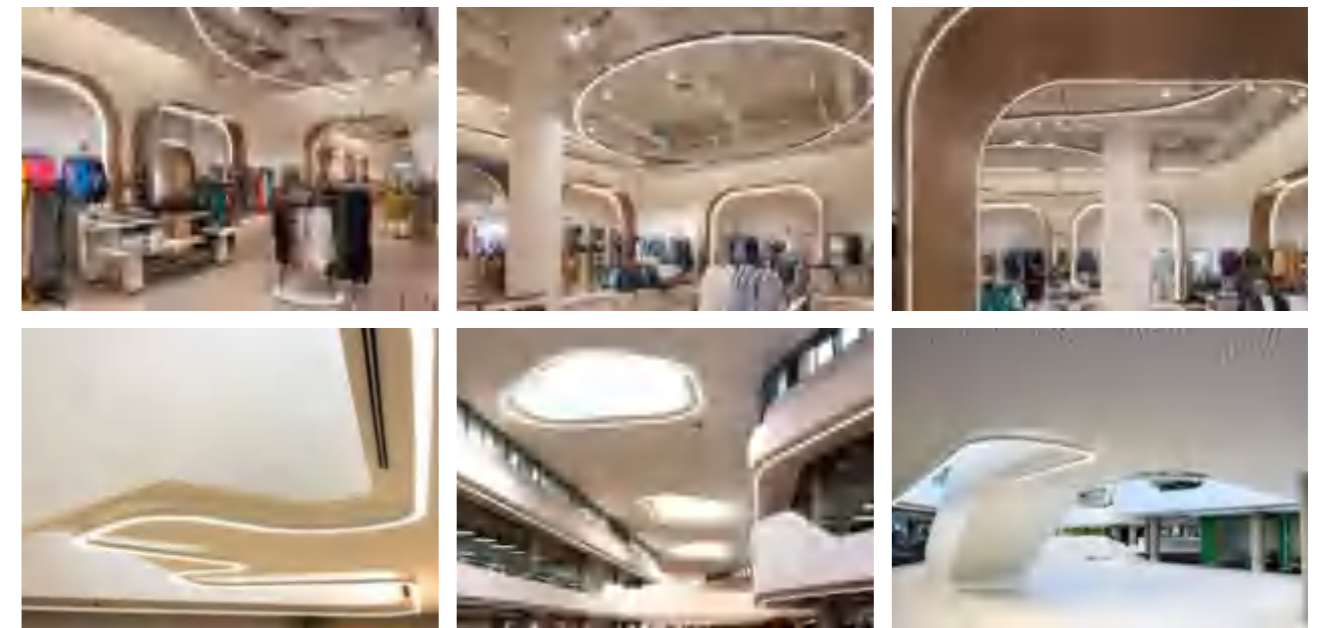

Circular series It represents the pinnacle of lighting art design, offering a range of standard shapes to choose from, achieving the perfect integration of space, lighting, and art. You can also visualize the results through the App preview.

MANUFACTURING & INSPECTION

HLINEAR seamlessly integrates product design, material performance, and manufacturing processes into its products to create unique lighting effects for clients. We are equipped not only with advanced processing equipment but also with an exceptional design team, extensive experience in customized production, and a commitment to high-quality standards.



SMT




Laser cutting



CNC



Texture board cutting

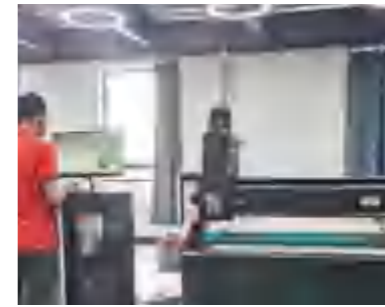

CNC for cover



Lights assembling



Polishing



Soldering



Bending



Lights aging



Spectrum testing



IES testing




Profiles assembling




Painting



Acoustic board cutting

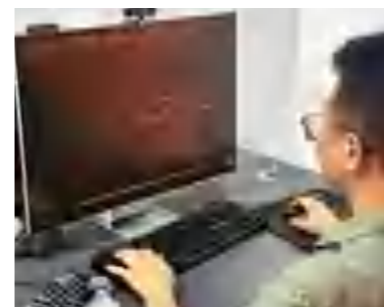

Projects drawing

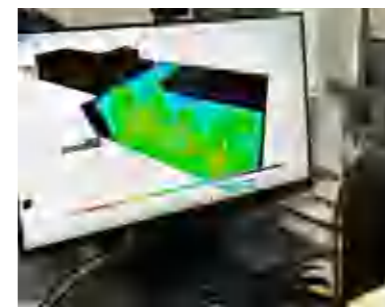

Lighting design



Finished products

HLINEAR & COOHOM

COOHOM is a highly comprehensive interior design software that also covers lighting design. It serves as a one-stop intelligent lighting solution that integrates design, marketing, and construction, helping lighting designers complete visual designs, diversify marketing efforts, and achieve digital implementation.

In COOHOM, you can use HLINEAR's lighting materials to quickly and easily create stunning lighting design solutions, even if you haven't studied lighting design professionally.



Cloud design

Cloud-based design significantly reduces equipment requirements while making solution sharing more convenient.



Rapid modeling

Imported drawings can be quickly modeled, and modifications are easy. A rich model library is also included, offering a wide variety of models.



Quick adjustments

Based on the actual HLINEAR lamps, you can freely modify parameters such as length, height, material, and color temperature.



Real-time preview

When modifying the design, you can see real-time changes in false color and lighting effects.



Free splicing

Using HLINEAR's corner models, you can freely splice components together. They will automatically snap into place, allowing you to customize the lines and shapes as you wish.



Lighting Scenario

When a scene involves multiple lighting fixtures that do not require simultaneous operation, you can manage the on/off control of each fixture by assigning them to different groups.




High-quality rendering

Intelligently positioned cameras enable fast, high-quality rendering.



Video export

Select a video template and make simple adjustments to render and export the video with one click.

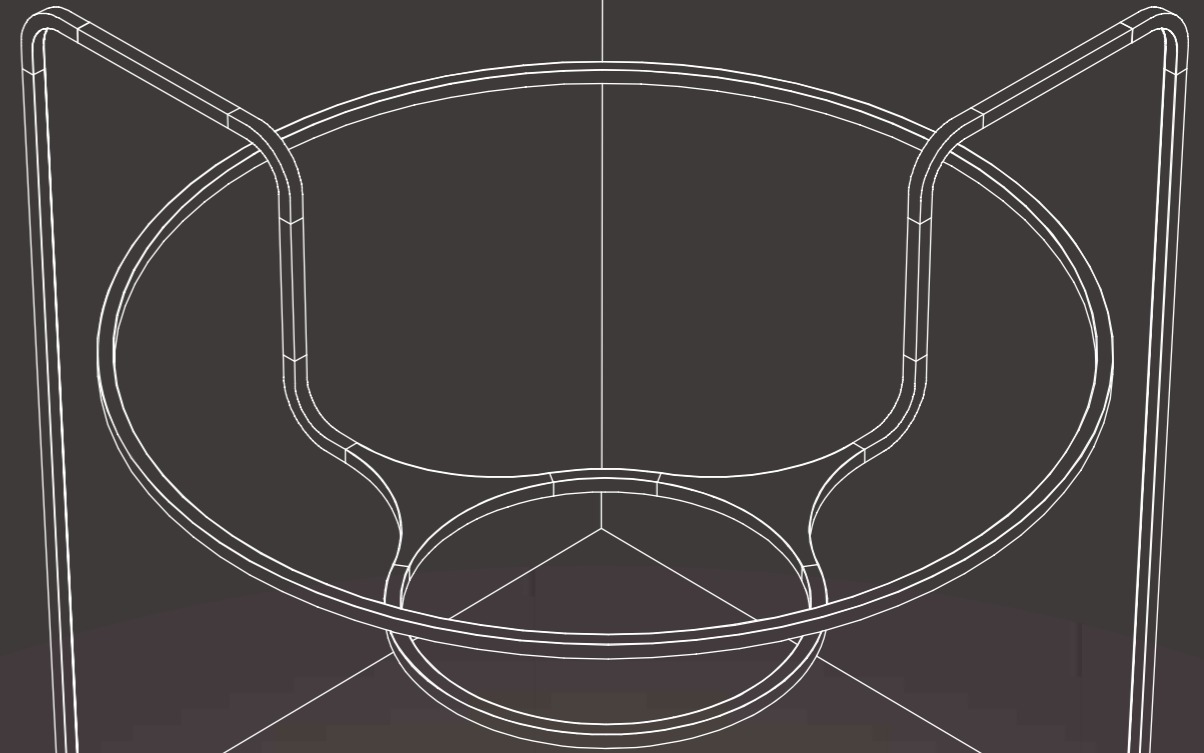

A cup of coffee's time, a project completed.



LinkedIn



Youtube

CERTIFICATION


All HLINEAR's products have been tested by renowned authoritative laboratory institutions and have passed various certifications, including ETL, CB, CE, SAA, SASO, 3C, REACH, RoHS, IP65, LM79 ect.

Additionally, we hold ISO 9001 and ISO 14001, ISO 45001 quality and environmental management certificates.



Patents


HLINEAR is dedicated to the research and development of products and technology. Currently, we have secured numerous invention patents.

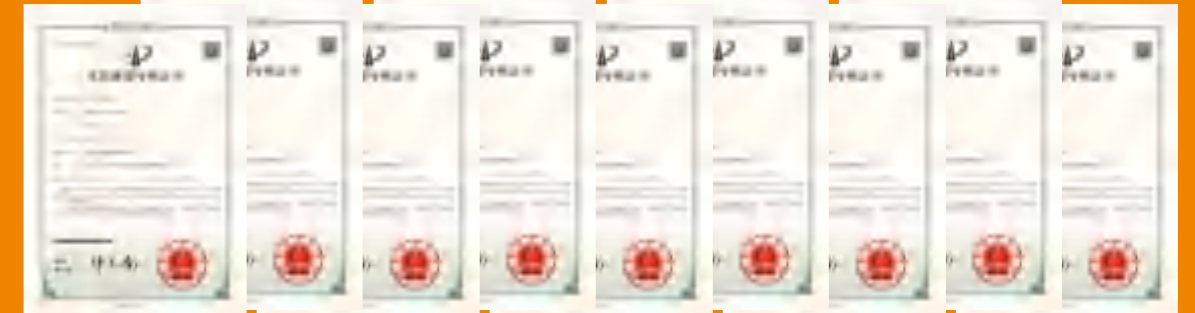

Certifications



ISO-9001 & ISO-14001 & ISO-45001 certifications

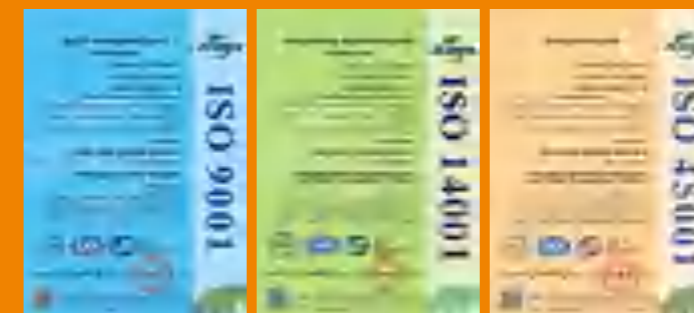

















































ACOUSTIC & TEXTURE LIGHTING

HLINEAR

- We are committed to ongoing technological innovation.
- We provide excellent quality assurance for our LED lights.
- We have various complete production line.
- We utilize environmentally friendly acoustic & texture materials.
- We have a well-established global market presence.
- We maintain a comprehensive after-sales service system.
- We ensure our products have a long lifespan and low maintenance costs.
- Our App allows for simultaneous space design, lighting design, and quotation.

The vibrant colors complement the acoustic insulation, creating a visually appealing and acoustically balanced space.

ACOUSTIC COLOURS

	HL-38		HL-21
	HL-04		HL-22
	HL-33		HL-23
	HL-34		HL-17
	HL-48		HL-46
	HL-35		HL-45
	HL-36		HL-25
	HL-32		HL-27
	HL-03		HL-30
	HL-02		HL-47
	HL-09		HL-29
	HL-10		HL-20
	HL-11		HL-24
	HL-08		HL-31
	HL-14		HL-01
	HL-26		HL-37
	HL-05		HL-39
	HL-06		HL-41
	HL-07		HL-28
	HL-12		HL-42
	HL-13		HL-40
	HL-15		HL-44
	HL-16		HL-43
	HL-18		
	HL-19		

Acoustic thickness
3mm/6mm/12mm/15mm/30mm/60mm/80mm






































HLINEAR's current Acoustic range showcases an impressive palette of 48 vibrant colors, significantly enriching the market with a multitude of design possibilities. Yet, this is just the beginning of our journey toward innovation and excellence.

We understand the profound influence of color in evoking emotions and enhancing the ambiance of any space. Our commitment to continuous improvement means we are excited to introduce new classic color schemes that resonate with contemporary design trends.

By diligently exploring color psychology and embracing diverse cultural perspectives, we aim to create color collections that align seamlessly with market demands and consumer preferences.

We warmly invite feedback and insights from our users and designers, as your ideas inspire our evolution. Through our relentless pursuit of innovation, we are dedicated to ensuring that HLINEAR's Acoustic series delivers not only a vibrant visual experience but also a uniquely personalized lighting solution for every space.

TEXTURE COLOURS

	TE-01 3-5mm*		TE-26 2-7mm
	TE-02 3-5mm		TE-27 2-7mm
	TE-03 3-5mm		TE-28 2-7mm
	TE-04 3-5mm		TE-29 3-7mm
	TE-05 3-5mm		TE-30 3-5mm
	TE-06 3-5mm		TE-31 3-10mm
	TE-07 3-5mm		TE-32 3-5mm
	TE-08 3-7mm		TE-33 3-12mm
	TE-09 3-7mm		TE-34 3-12mm
	TE-10 3-10mm		TE-35 3-12mm
	TE-11 3-7mm		
	TE-12 3-12mm		
	TE-13 3-12mm		
	TE-14 3-12mm		
	TE-15 3-12mm		
	TE-16 4-6mm		
	TE-17 4-6mm		
	TE-18 3-6mm		
	TE-19 3-6mm		
	TE-20 4-8mm		
	TE-21 4-6mm		
	TE-22 3-5mm		
	TE-23 4-8mm		
	TE-24 3-6mm		
	TE-25 4-8mm		

* Texture thickness

Type: 3-5mm the lowest thickness is 3mm and the highest thickness is 5mm.



HLINEAR seamlessly integrates premium materials such as travertine, wood, and earth into our lighting fixtures, delivering a sophisticated and immersive visual experience. The refined texture of travertine introduces a sense of luxury and warmth, while the rich wood grain adds a timeless, inviting aesthetic.

In contrast, the raw, organic essence of earthy materials imparts a natural authenticity to the design. By incorporating these textures, we not only enhance the visual appeal of our products but also create a meaningful connection to nature and sustainability.

This harmonious blend of natural materials and cutting-edge lighting technology positions our fixtures as both highly functional and aesthetically compelling, offering a unique, emotionally resonant experience that aligns with modern design sensibilities.

PROFILE COLOURS

	Powder Coated Matt Black		Powder Coated Light Green
	Powder Coated Matt White		Powder Coated Pure Green
	Powder Coated Bright Silver		Sand Blash Anodized Grey
	Powder Coated Black Grey		Sand Blash Painted Gold
	Powder Coated Slate Grey		Paint Spraying Yellow
	Powder Coated Telegrey 4		Sand Blash Painted Marsala Red
	Powder Coated Pearl Mouse Grey		Paint Spraying Marsala Red
	Powder Coated White Aluminium		Anodized Brush Black
	Powder Coated Greey White		Anodized Brush Grey
	Powder Coated Beige		Anodized Brush Rose Gold
	Powder Coated Sand Yellow		Anodized Brush Plating Copper
	Powder Coated Sulfur Yellow		Anodized Brush Gold (Bright)
	Powder Coated Signal Yellow		Anodized Brush Gold (Matt)
	Powder Coated Pastell Orange		Plating Gold
	Powder Coated Shinning Gold Color		Electrophoresis Gold Color
	Powder Coated Khakigrau		Electrophoresis Champagne Color
	Powder Coated Brown		Bead brasted broze with anti-fingerprint finishing
	Powder Coated Copper Color		PANTONE 7575C
	Powder Coated Black Red		We-transfer printing Wooden Grain
	Powder Coated Heather Violet Purple		
	Powder Coated Traffic Red		
	Powder Coated Matt Grey		
	Powder Coated Pastel Blue		
	Powder Coated Brilliant Blue		
	Powder Coated Signal Blue		



HLINEAR offers a diverse range of colors achieved through various manufacturing processes, including Powder Coating for a durable and even finish, Sand Blast Painting for a textured and rugged appearance, Anodized Brushing for a refined and sleek look with increased corrosion resistance, Electrophoresis for a smooth and even coating with excellent adhesion, and Plating for a decorative and protective metallic surface.

These techniques provide HLINEAR with the flexibility to cater to different aesthetic and functional requirements, ensuring that customers can find a product that not only meets their performance needs but also matches their visual preferences.

L6080 series



Circle P32



Rectangle P33



Oval P34



Eye P35



Belief P36



Galaxy P37



Quadrate P38



Triangle P39



Hexagon P40




Rhombus P41

L6060-3D



L6060-3D P42

L64120



L64120 P50

LXX80-3.0



LXX80 3.0 P53

Indirect series



L2530 P70



L3535 P71



L2540 P72



L2540 V2.0 P73



L2555 P74



L3150 P75



L3760 P76



L3760 V2.0 P77



L2075 P78



L60100 P79



L5050 P80




L6060 P81


L42XX / L64XX / L80XX



L42XX P57



L64XX P58



L80XX P59

Circular series



S | Wrapped P84



Circle | Wrapped P88



Circle | Filled P89



Circle | Hat P90



Belief | Wrapped P91



Belief | Filled P92



Belief | Hat P93



Oval | Wrapped P94



Oval | Filled P95



Oval | Hat P96



Eye | Wrapped P97



Eye | Filled P98



Eye | Hat P99



Galaxy | Wrapped P102



Galaxy | Filled P103



Galaxy | Hat P104



Faith | Wrapped P106



Faith | Filled P107

Linear series



Line | Wrapped P110



Hexagon | Wrapped P114



Hexagon | Filled P115



Hexagon | Hat P116



Rhombus | Wrapped P117



Rhombus | Filled P118



Rhombus | Hat P119



Quadrate | Wrapped P122



Quadrate | Filled P123



Quadrate | Hat P124



Triangle | Wrapped P125




Triangle | Filled P126



Triangle | Hat P127

Lens series



Line P130



S P131



Circle P133



Triangle P135



Galaxy P136



Quadrat P137



Belief P138



Faith P139



Hexagon P140



Rhombus P141



Oval P142



Eye P143

Louver series



Linear louver P146



Linear louver P147



Honeycomb louver P148



Honeycomb louver P149

Decoration series



Belief P152



Circle P153



Eye P154



Galaxy P155



Galaxy V2.0 P156



Galaxy V3.0 P157



Hexagon P158



Oval P159



Quadrat P160



Rhombus P161



Triangle P162

Moon series



Taurus P166



Aries P167



Gemini P168



Cancer P169



Leo P170



Virgo P171



Scorpio P172



Sagittarius P173



Capricorn P174



Pisces P175



Galaxy P176



Libra P177

Moon recessed series



Taurus P178



Aries P179



Gemini P180



Cancer P181



Leo P182



Virgo P183



Scorpio P184



Sagittarius P185



Capricorn P186




Pisces P187




Galax P188



Libra P189

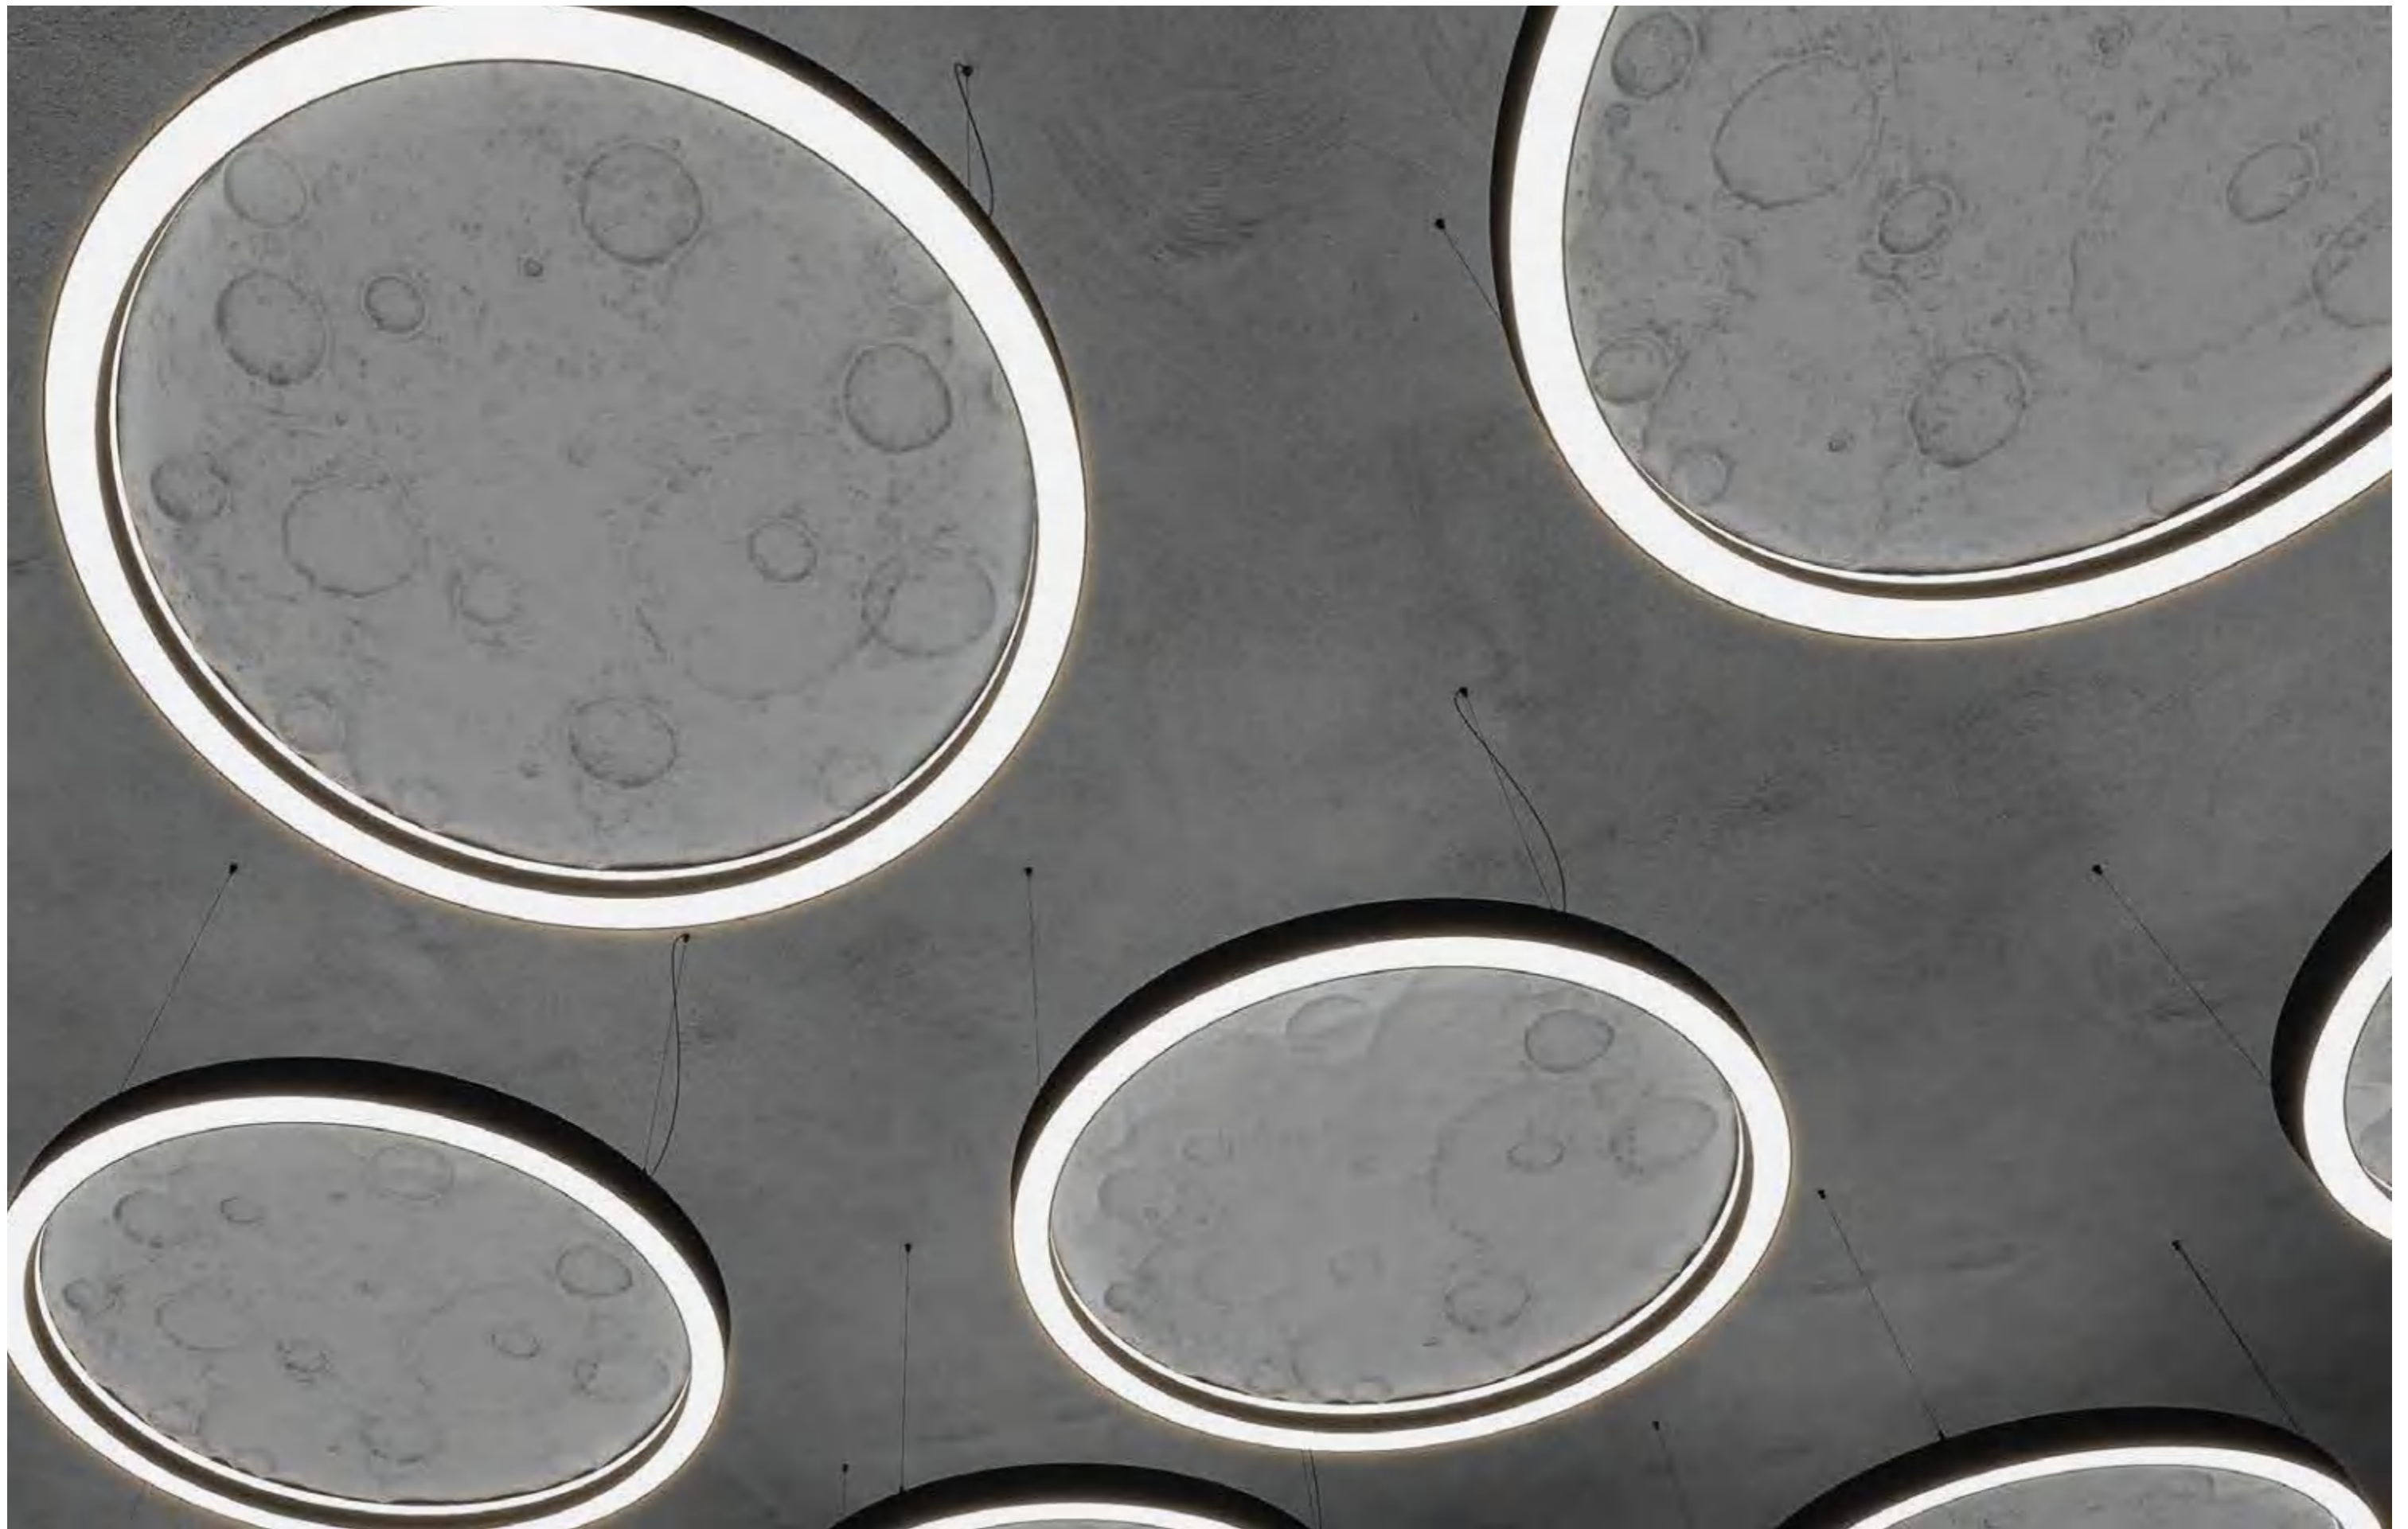

L6080 | Circle

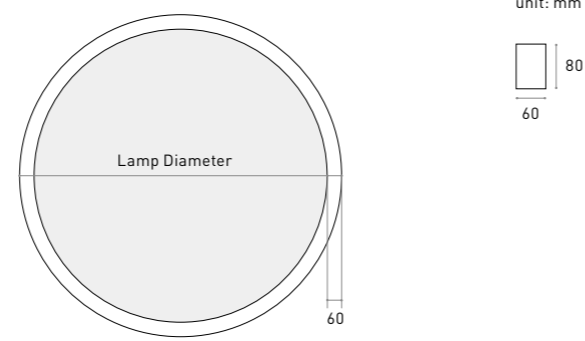

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE



LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L6080	450	20+5	1500
L6080	660	30+7.5	2250
L6080	900	40+10	3000
L6080	1060	50+12.5	3750
L6080	1200	60+15	4500

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

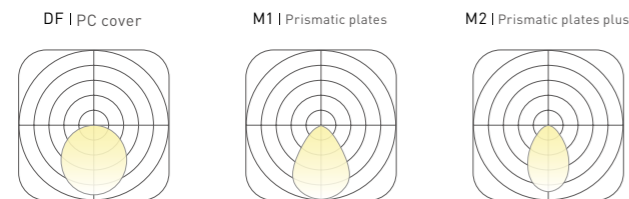

L6080 | Rectangle

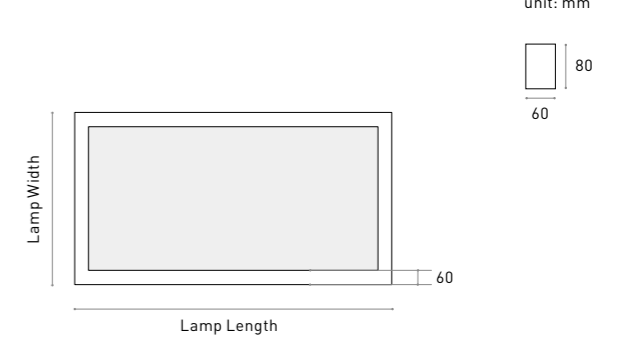

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE


LAMPS PARAMETER

Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	1200	600	72+18	5400

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

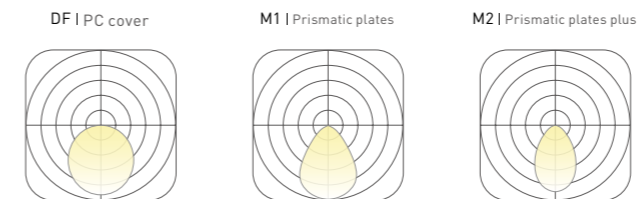

L6080 | Oval

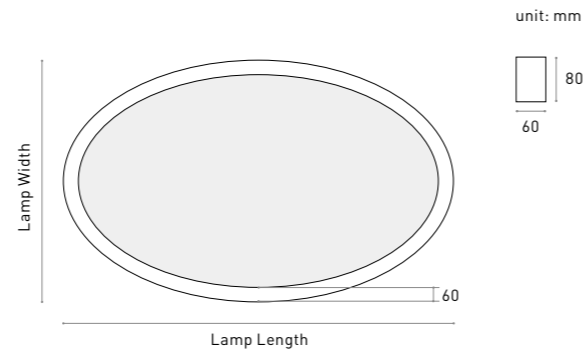

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE



LAMPS PARAMETER

Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	900	556	30+7.5	2250
L6080	1200	740	40+10	3000

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

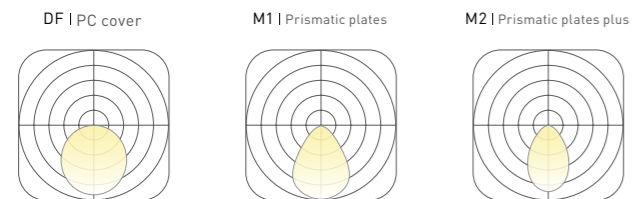

L6080 | Eye

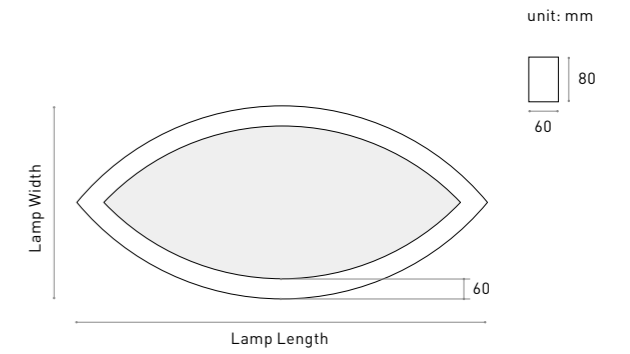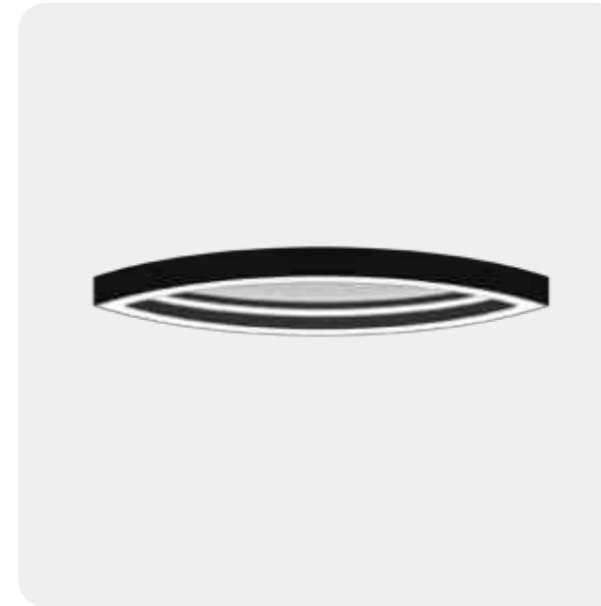

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE


LAMPS PARAMETER

Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	600	229	20+5	1500
L6080	900	406	30+7.5	2250
L6080	1200	563	40+10	3000

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

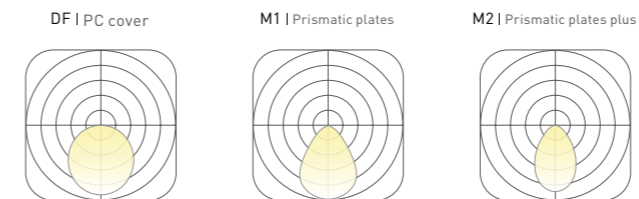

L6080 | Belief

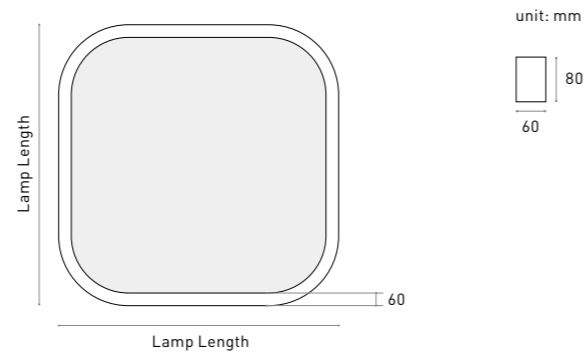

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE


LAMPS PARAMETER

Model	Length(mm)	Power (w)	Luminous (lm)
L6080	900	50+12.5	3750
L6080	1032	60+15	4500
L6080	1200	70+17.5	5250

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

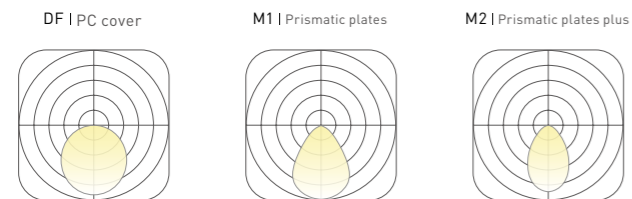

L6080 | Galaxy

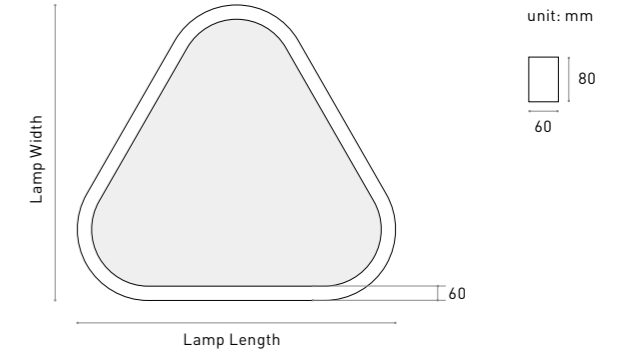

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE


LAMPS PARAMETER

Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	600	559	30+7.5	2250
L6080	900	833	40+10	3000
L6080	1200	1099	60+15	4500

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

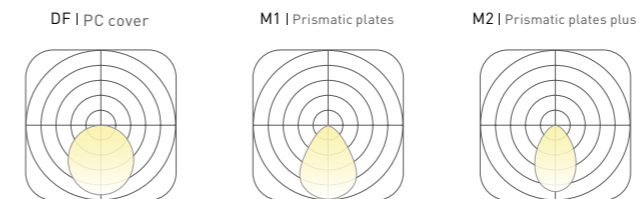

L6080 | Quadrate

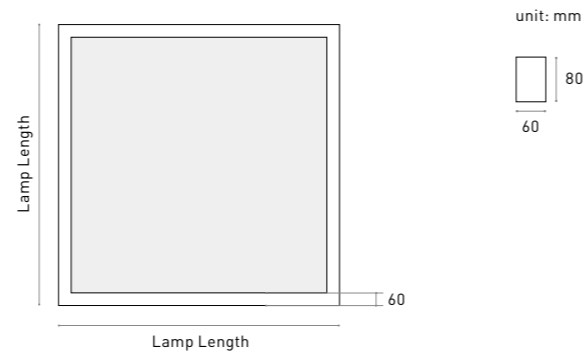

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE



LAMPS PARAMETER

Model	Length(mm)	Power (w)	Luminous (lm)
L6080	600	40+10	3000
L6080	816	55+13	4080
L6080	900	60+15	4500
L6080	1116	70+17.5	5250
L6080	1200	80+20	6000

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

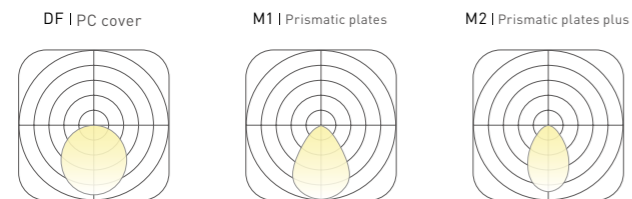

L6080 | Triangle

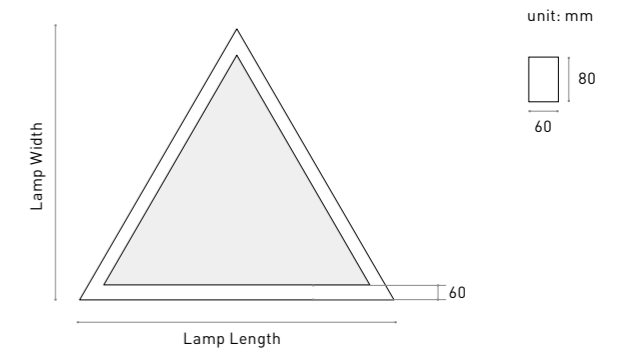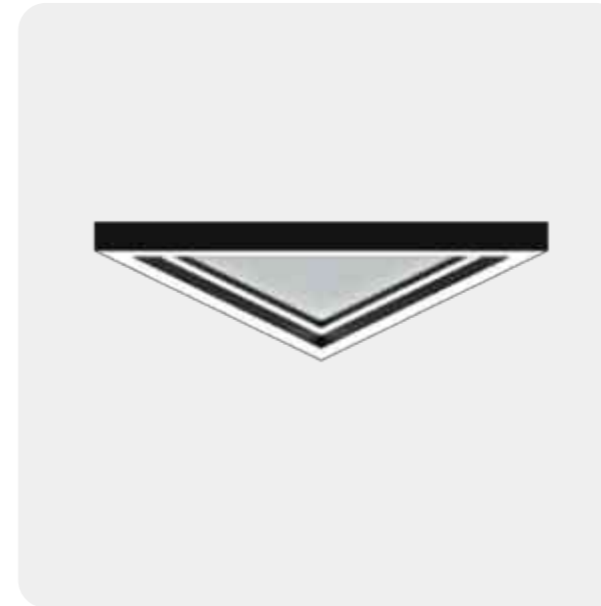

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE



LAMPS PARAMETER

Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	600	520	30+7.5	2250
L6080	900	779	50+12.5	3750
L6080	1200	1039	60+15	4500

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

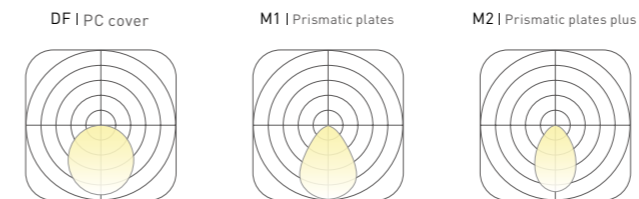

L6080 | Hexagon

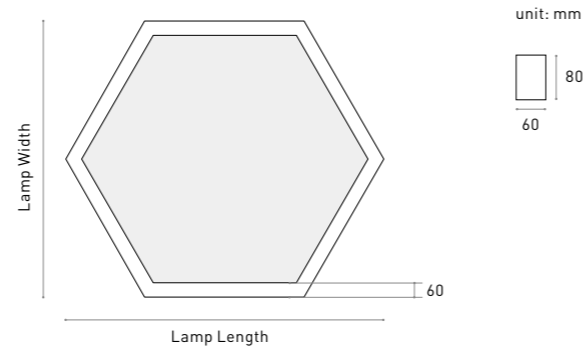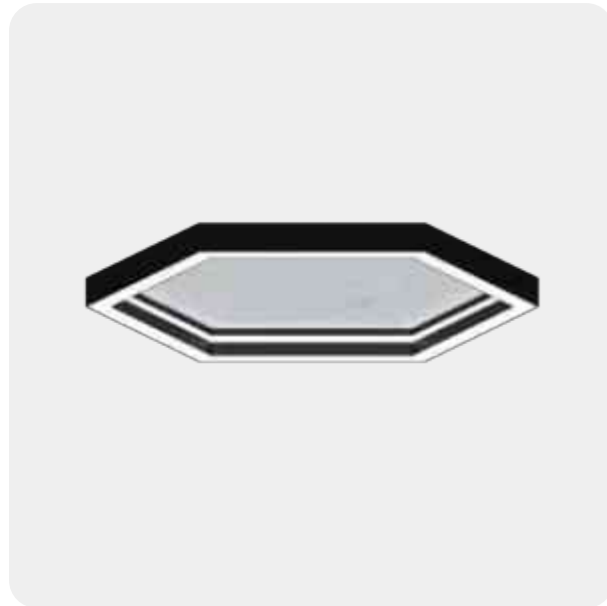

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE


LAMPS PARAMETER

Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	600	519	25+6	1860
L6080	750	649	30+7.5	2250
L6080	900	779	30+7.5	2250
L6080	1050	909	45+11	3360
L6080	1200	1039	60+15	4500

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

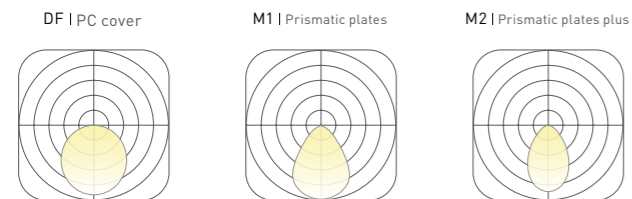

L6080 | Rhombus

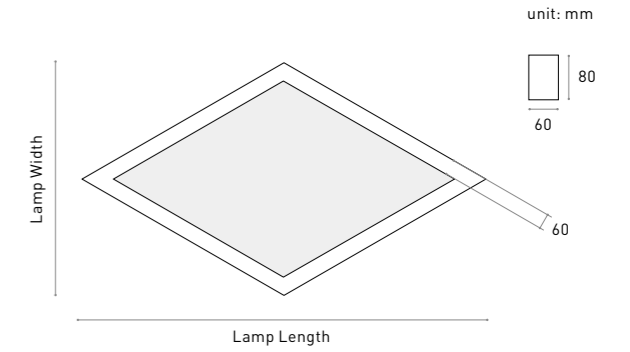

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down&Inner , UP&Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	60-80lm/W
Profile	W60mm*H80mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE

LAMPS PARAMETER


Model	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
L6080	848	489	30+7.5	2250
L6080	1200	692	50+12.5	3750

*Lumens @ 4000K , CRI>80 , PC , Down&Inner

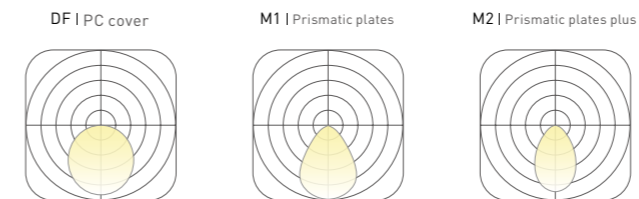



L6060-3D

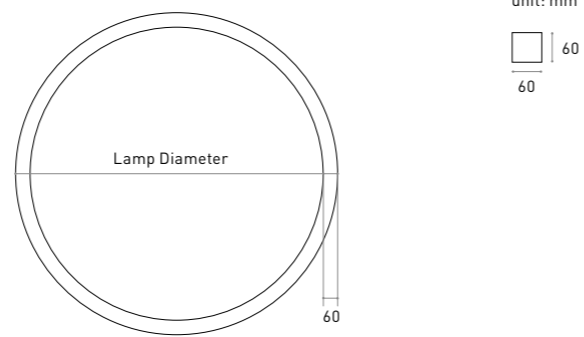

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Profile	W60mm*H60mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L6060	450	20	2000
L6060	660	30	3000
L6060	900	40	4000
L6060	1060	50	5000
L6060	1200	60	6000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

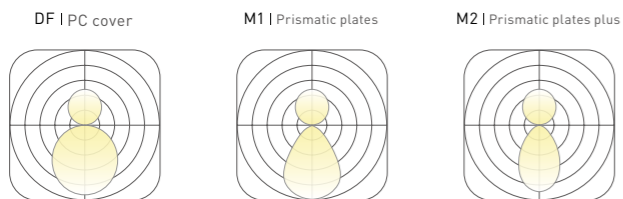


Circular corners

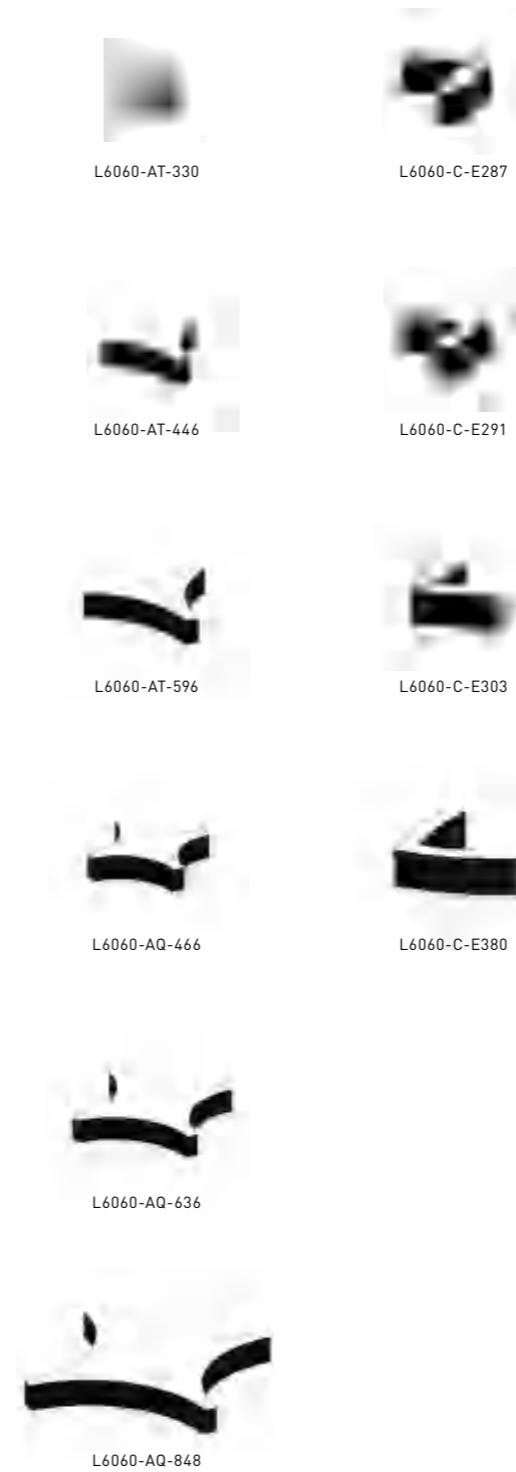

Linear corners

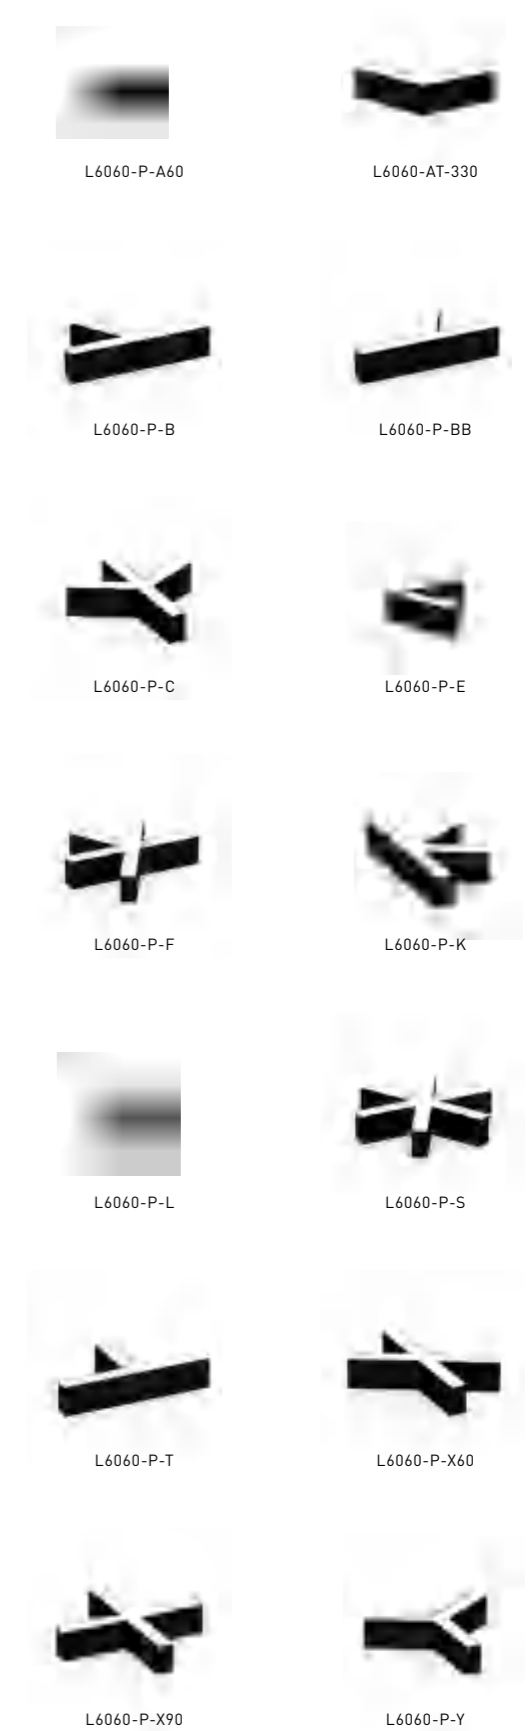


Circular corners

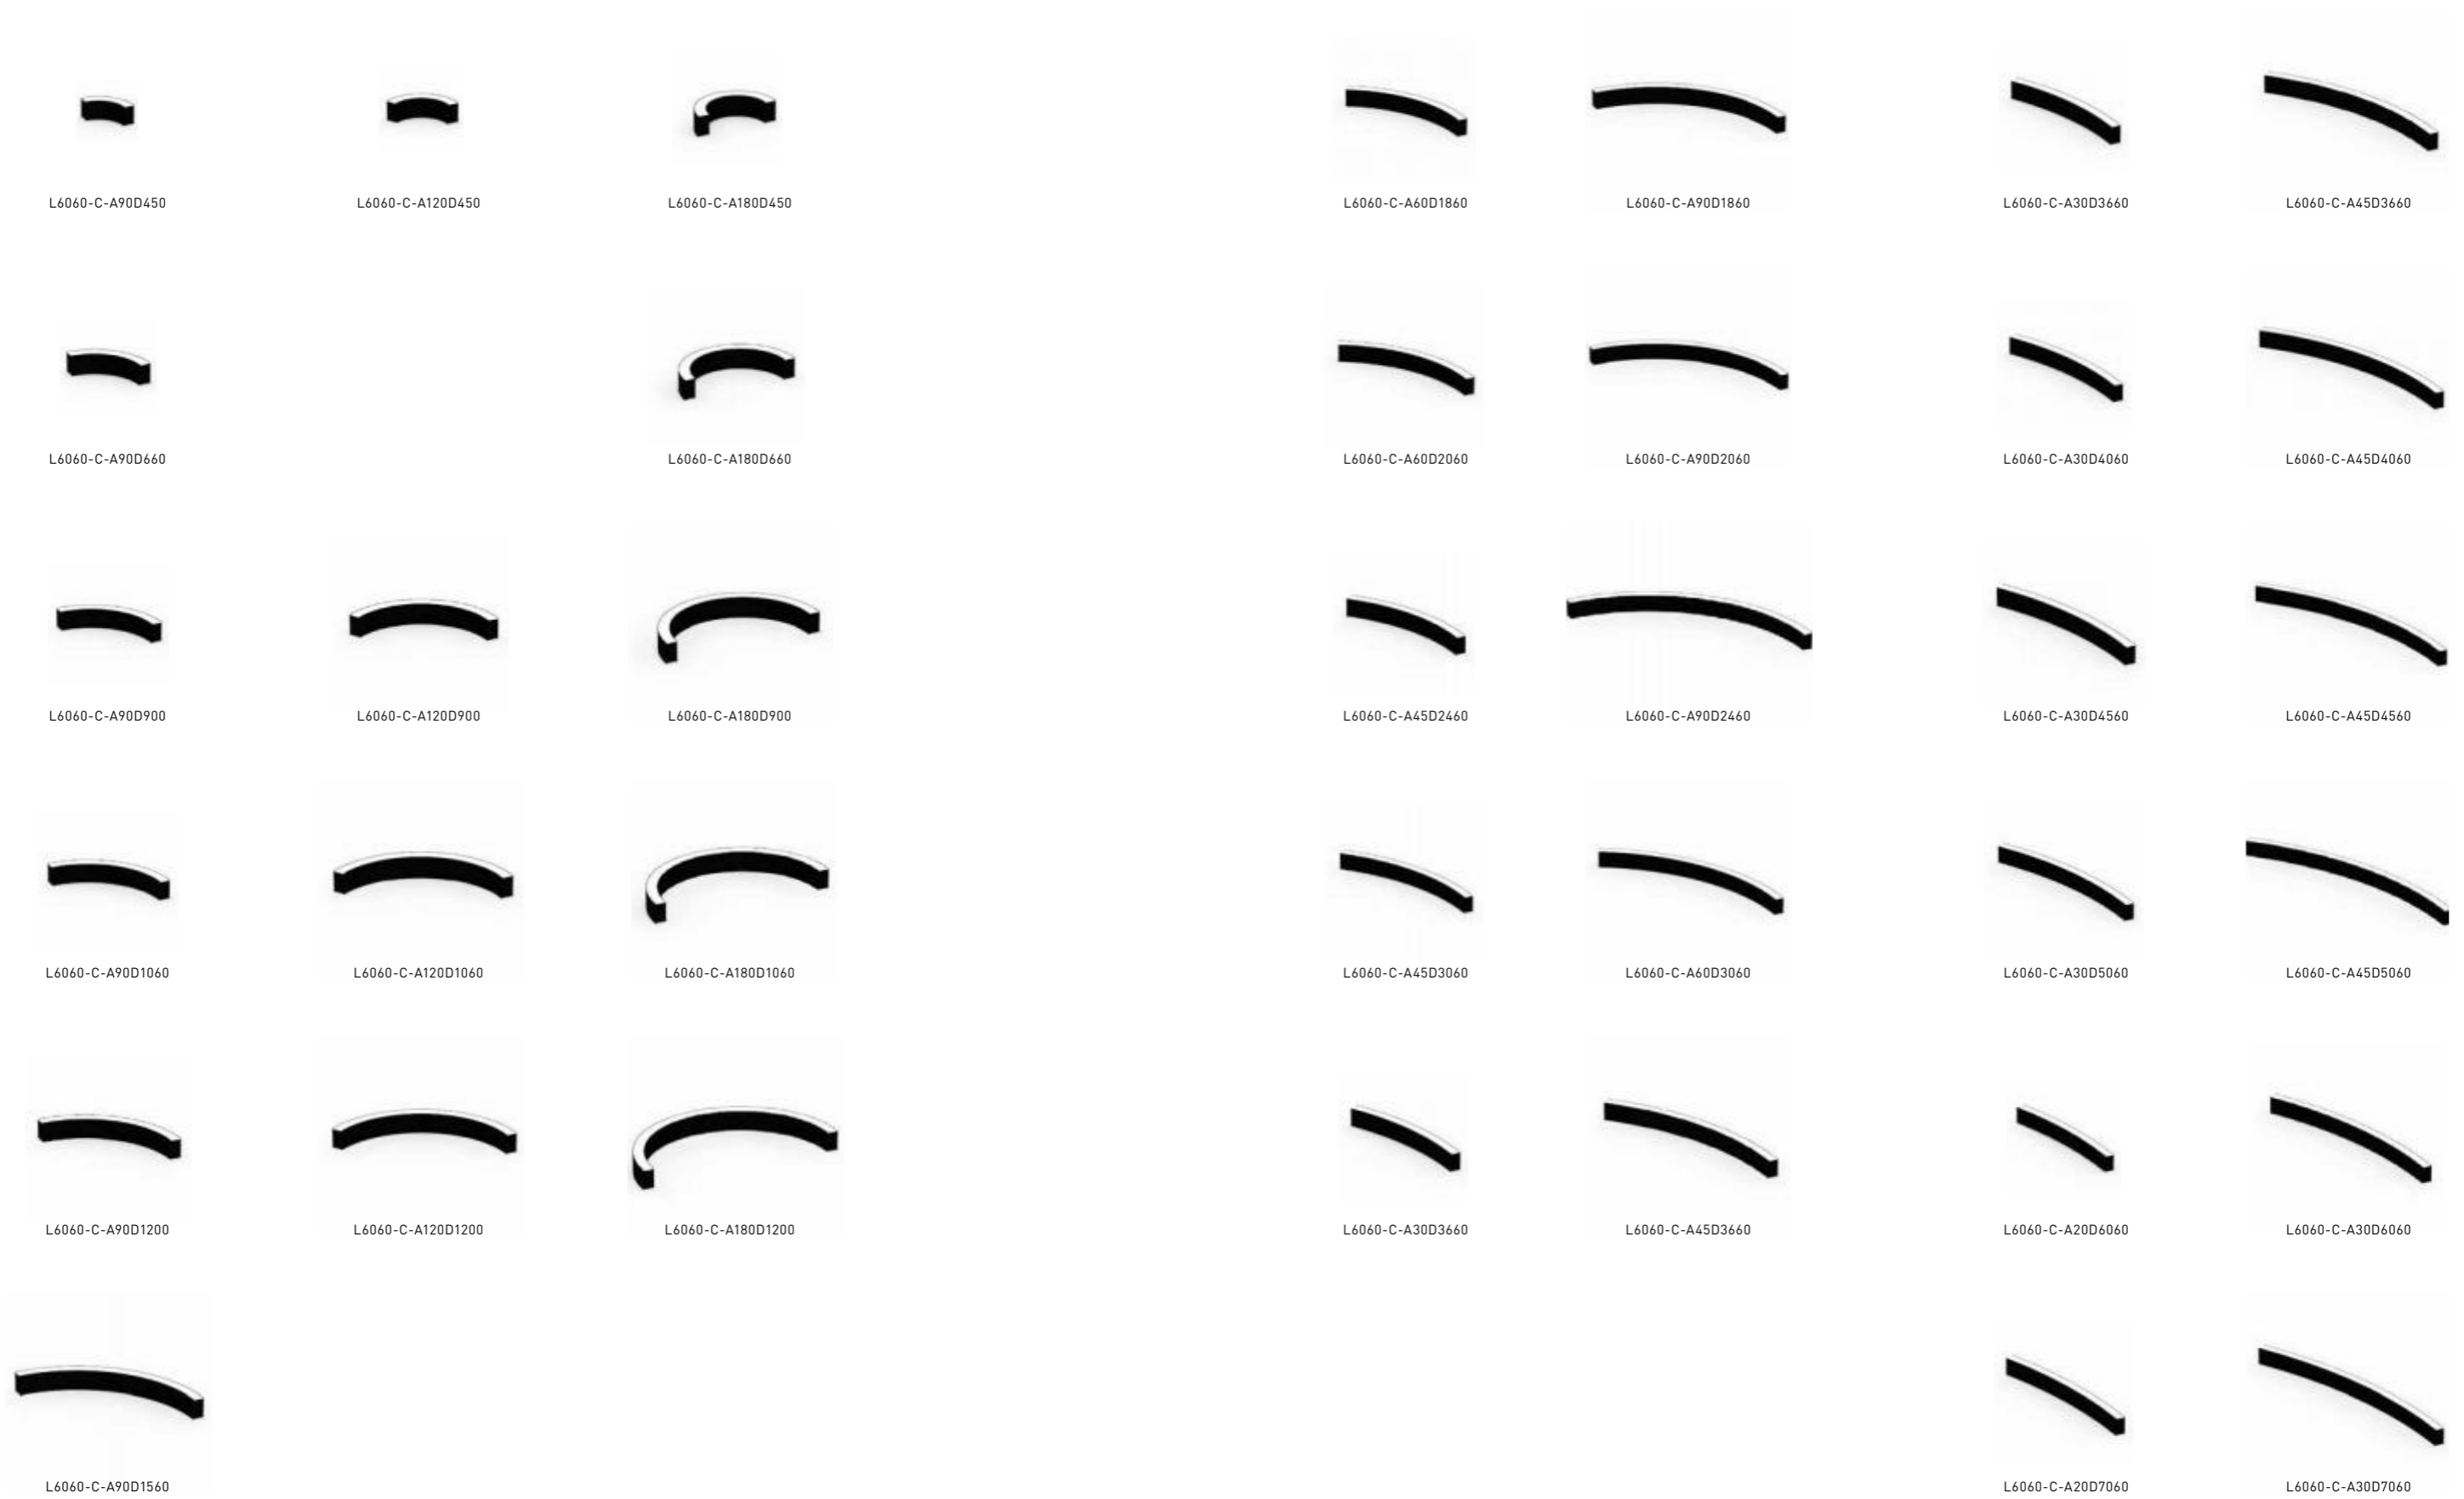


More customized cases



Application of circular corners

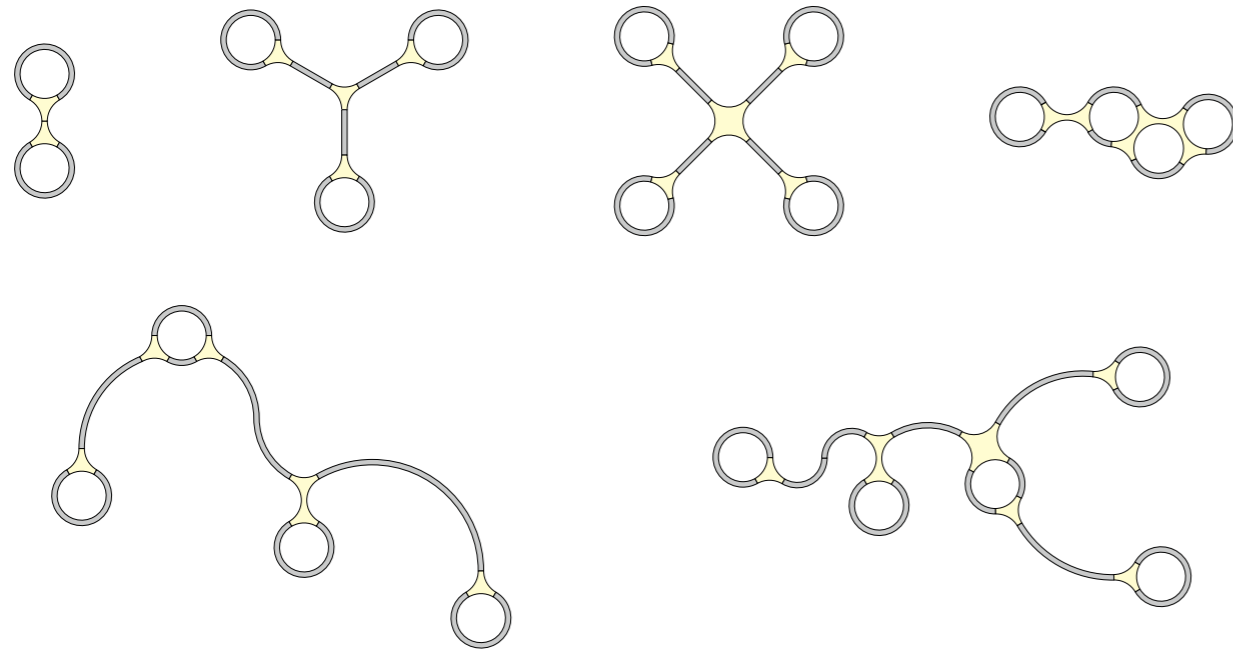


Application of linear corners

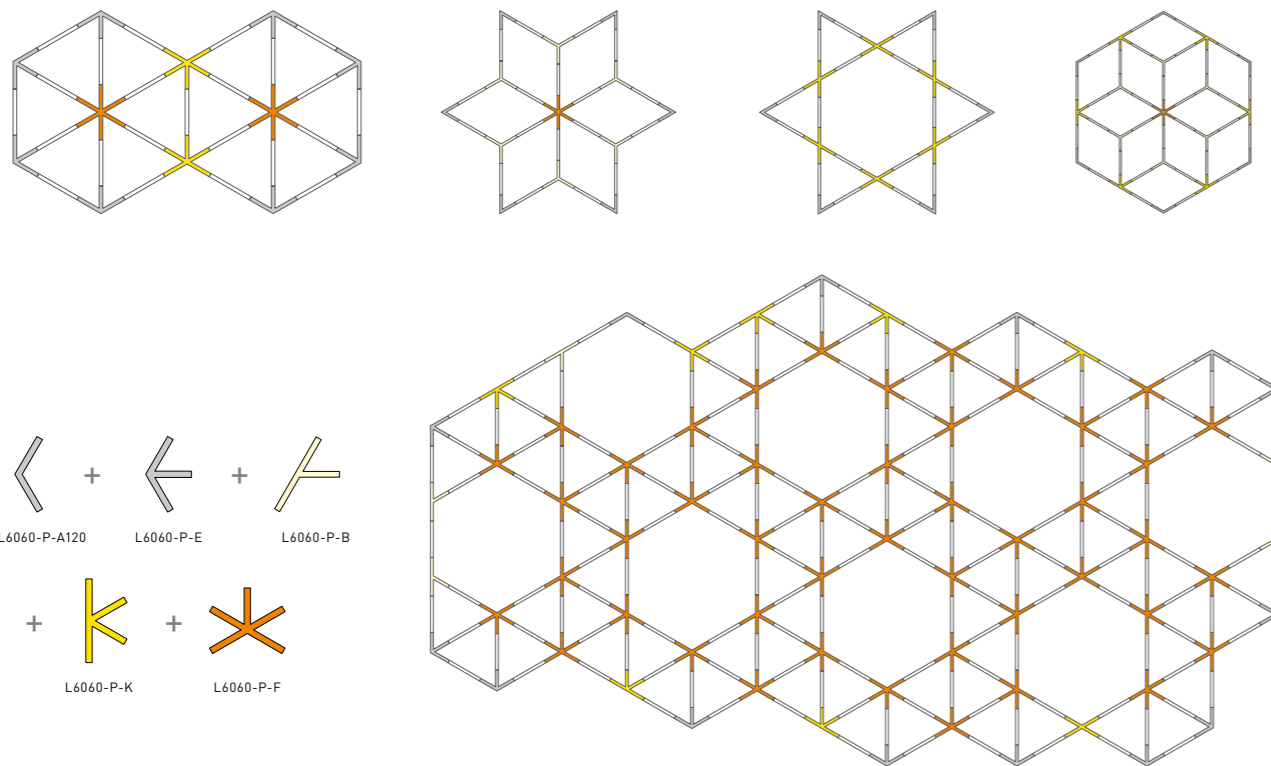

Application of linear corners

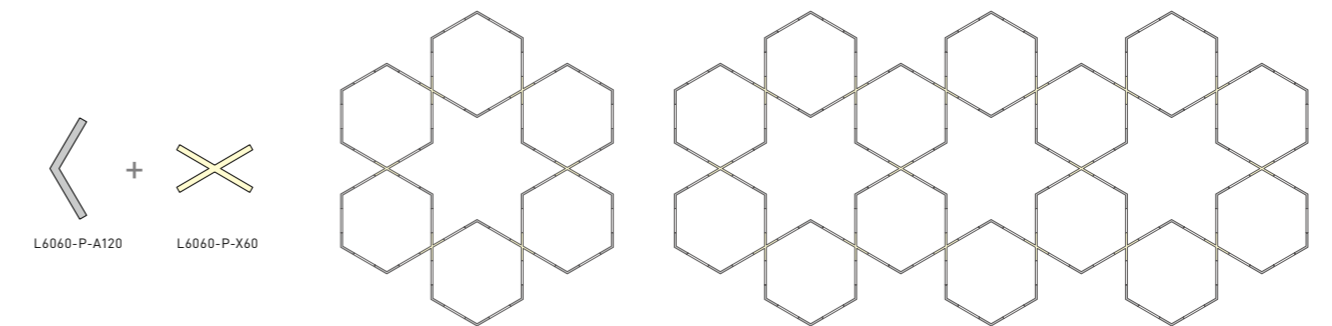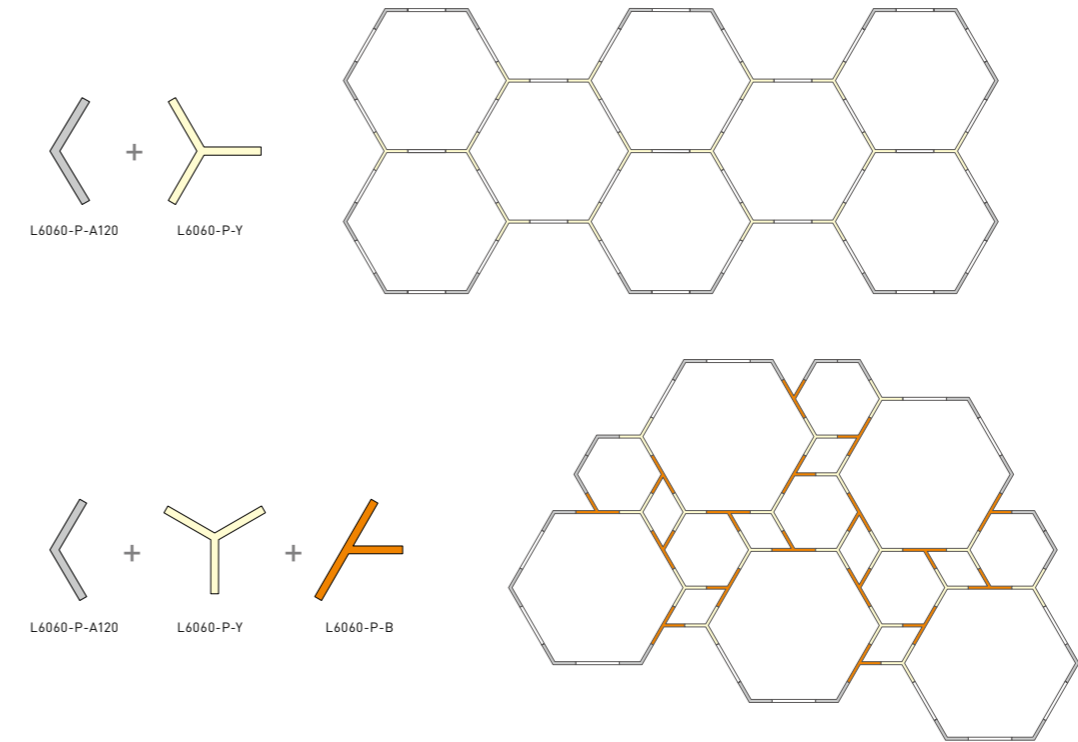


Application of circular&linear corners

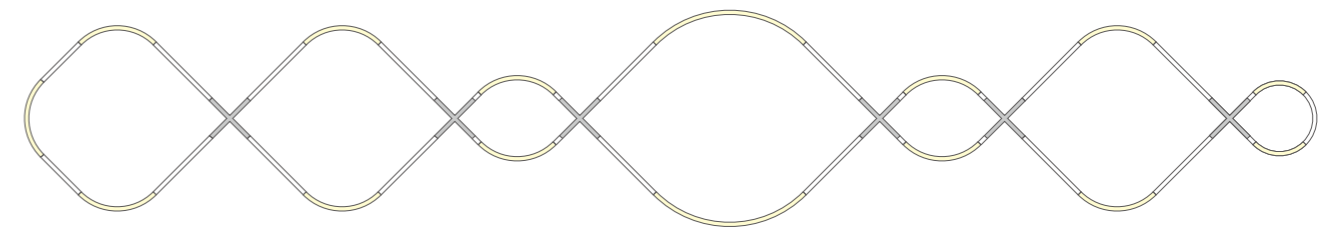



L64120 | Circle

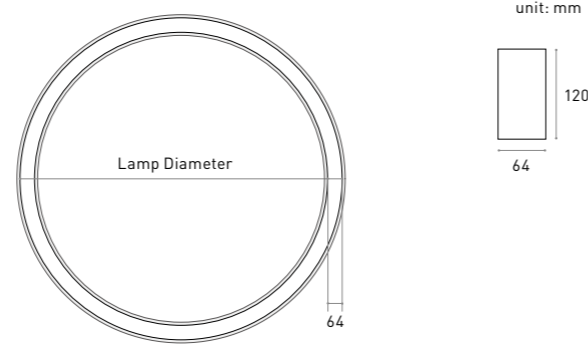

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Up&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Profile	W64mm*H120mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L64120	454	20	2000
L64120	664	30	3000
L64120	904	40	4000
L64120	1064	50	5000
L64120	1200	60	6000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

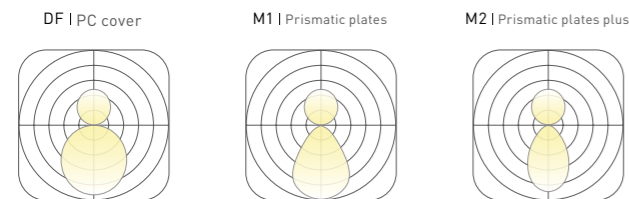

LXX80 | Circle

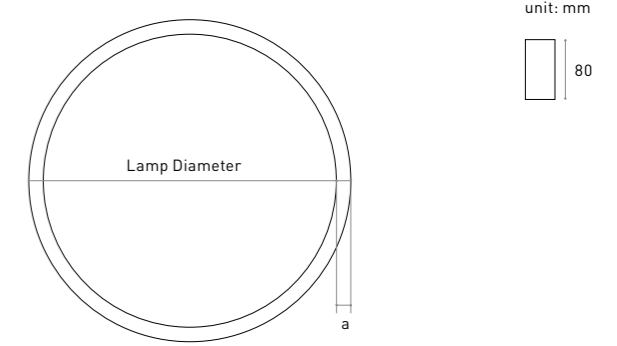

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Up&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Profile	H80mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE

LAMPS PARAMETER

a(mm)	Diameter(mm)	Power (w)	Luminous (lm)
40	450	10	1000
40	600	15	1500
40	740	20	2000
40	900	25	2500
40	1000	30	3000
40	1200	35	3500
60	450	20	2000
60	660	30	3000
60	900	40	4000
60	1060	50	5000
60	1200	60	6000
80	680	30	3000
80	900	50	5000
80	1200	80	8000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

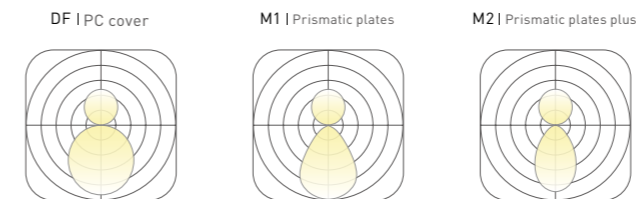





L42XX

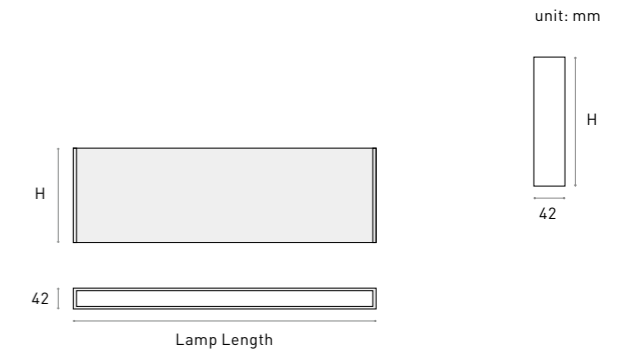

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Texture** [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 TE-03 TE-04 TE-05 Silver Black White


BASIC PARAMETER

Lighting direction	Up&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	200-600mm
Power	10 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

Model	Length(mm)	Power (w)	Luminous (lm)
L42XX	500	5	500
L42XX	600	6	600
L42XX	700	7	700
L42XX	800	8	800
L42XX	900	9	900
L42XX	1000	10	1000
L42XX	1100	11	1100
L42XX	1200	12	1200
L42XX	1300	13	1300
L42XX	1400	14	1400
L42XX	1500	15	1500
L42XX	1600	16	1600
L42XX	1700	17	1700
L42XX	1800	18	1800
L42XX	1900	19	1900
L42XX	2000	20	2000
L42XX	2100	21	2100
L42XX	2200	22	2200
L42XX	2300	23	2300
L42XX	2400	24	2400

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

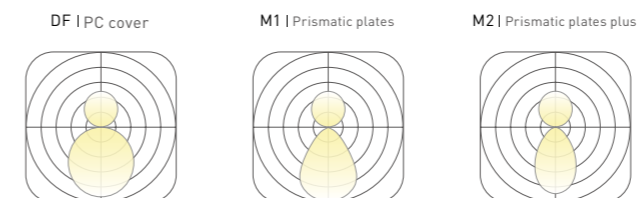

L64XX

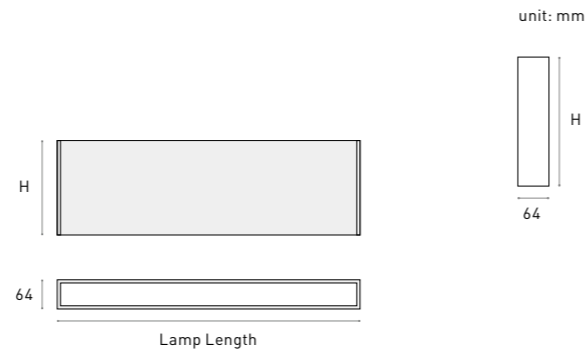



COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

L80XX

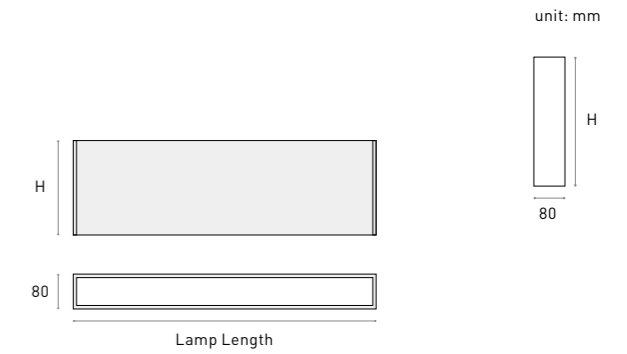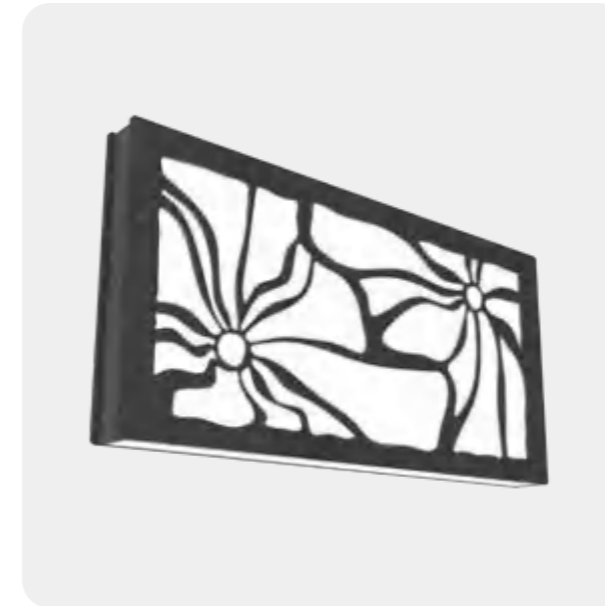

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Up&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	200-600mm
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS REACH FREE

LAMPS PARAMETER

Model	Length(mm)	Power (w)	Luminous (lm)
L64XX	500	10	1000
L64XX	600	12	1200
L64XX	700	14	1400
L64XX	800	16	1600
L64XX	900	18	1800
L64XX	1000	20	2000
L64XX	1100	22	2200
L64XX	1200	24	2400
L64XX	1300	26	2600
L64XX	1400	28	2800
L64XX	1500	30	3000
L64XX	1600	32	3200
L64XX	1700	34	3400
L64XX	1800	36	3600
L64XX	1900	38	3800
L64XX	2000	40	4000
L64XX	2100	42	4200
L64XX	2200	44	4400
L64XX	2300	46	4600
L64XX	2400	48	4800

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

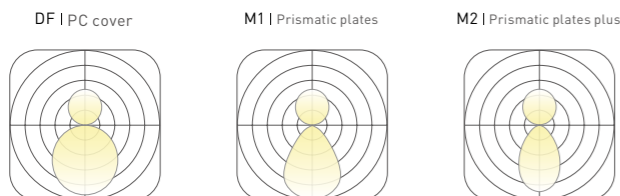


BASIC PARAMETER

Lighting direction	Up&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	200-600mm
Power	30 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS REACH FREE

LAMPS PARAMETER

Model	Length(mm)	Power (w)	Luminous (lm)
L80XX	500	15	1500
L80XX	600	18	1800
L80XX	700	21	2100
L80XX	800	24	2400
L80XX	900	27	2700
L80XX	1000	30	3000
L80XX	1100	33	3300
L80XX	1200	36	3600
L80XX	1300	39	3900
L80XX	1400	42	4200
L80XX	1500	45	4500
L80XX	1600	48	4800
L80XX	1700	51	5100
L80XX	1800	54	5400
L80XX	1900	57	5700
L80XX	2000	60	6000
L80XX	2100	63	6300
L80XX	2200	66	6600
L80XX	2300	69	6900
L80XX	2400	72	7200

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting


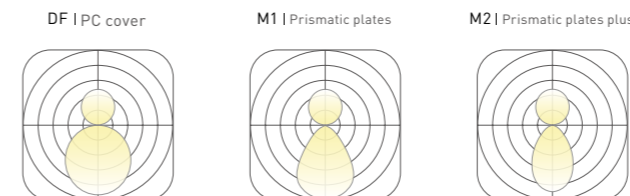


Acoustic content reference

Logo and slogan type





Decorative Art Patterns type

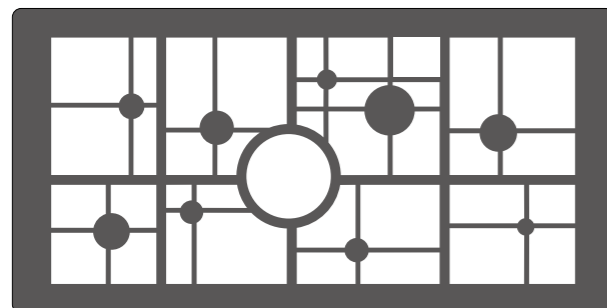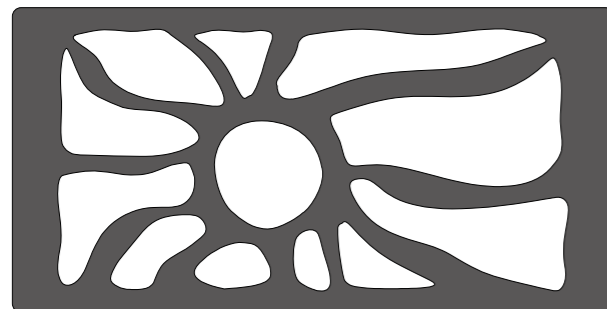

*The above patterns are available for reference, welcome to customize your own patterns.


Geometric figure type

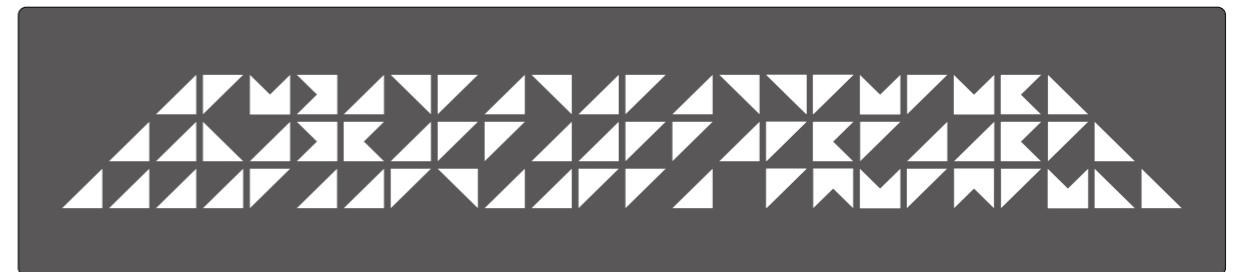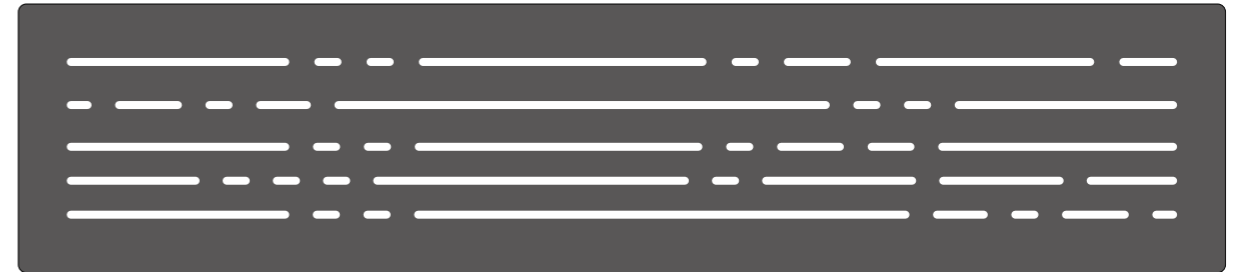










More concepts

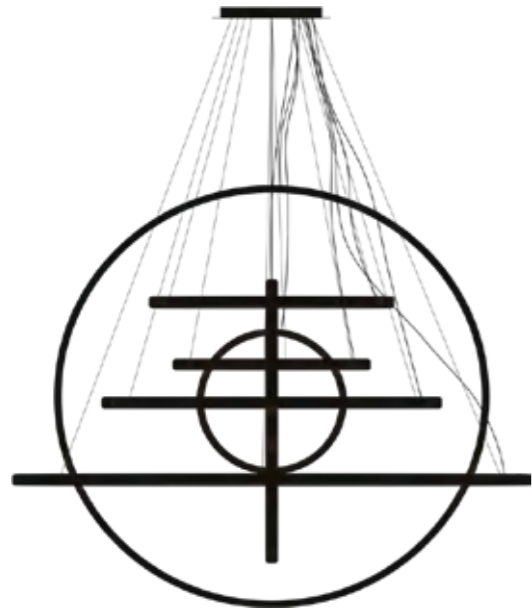




ETERNITY

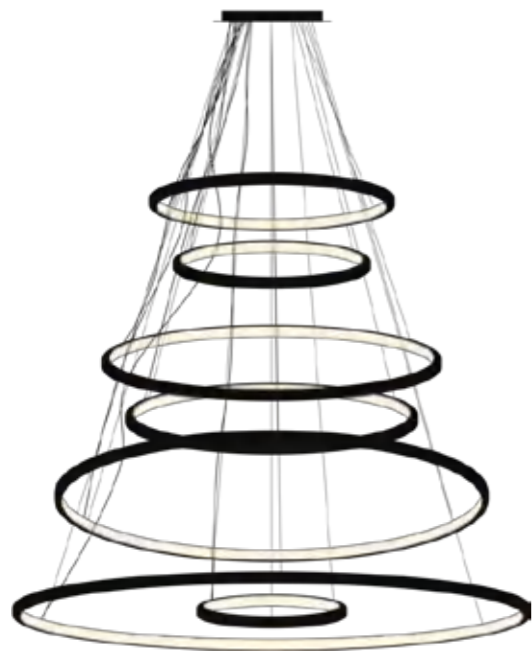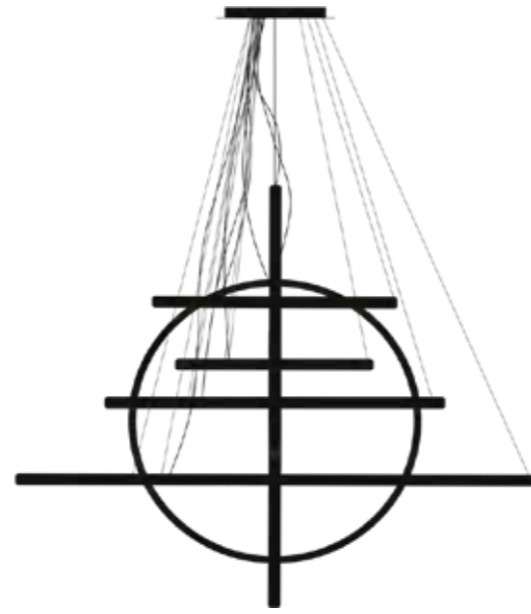


TIME

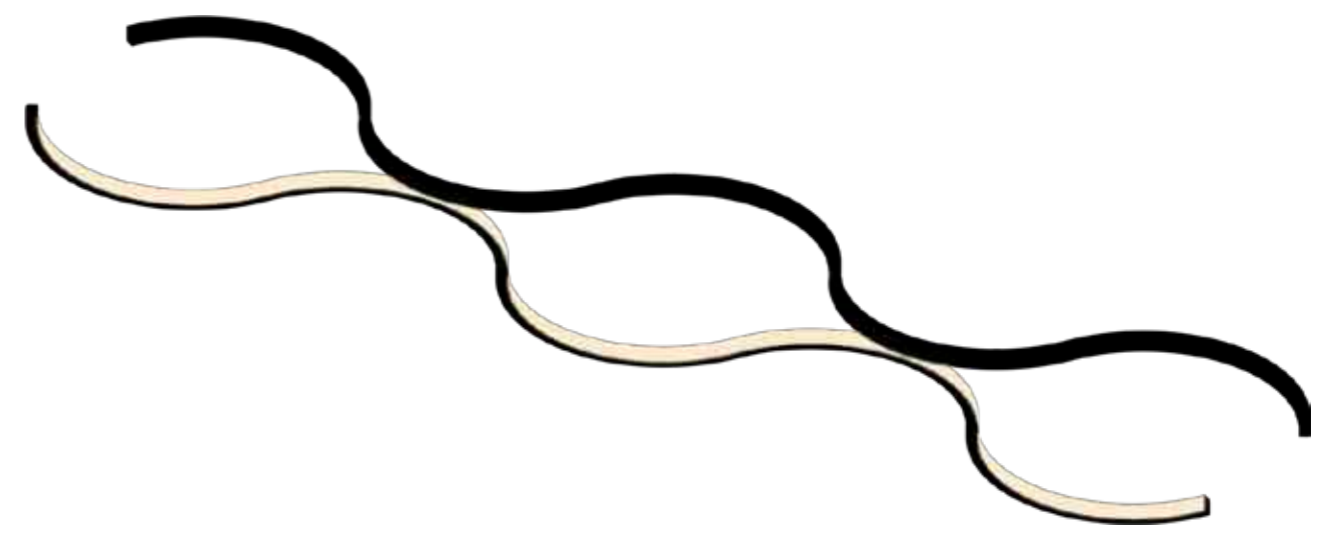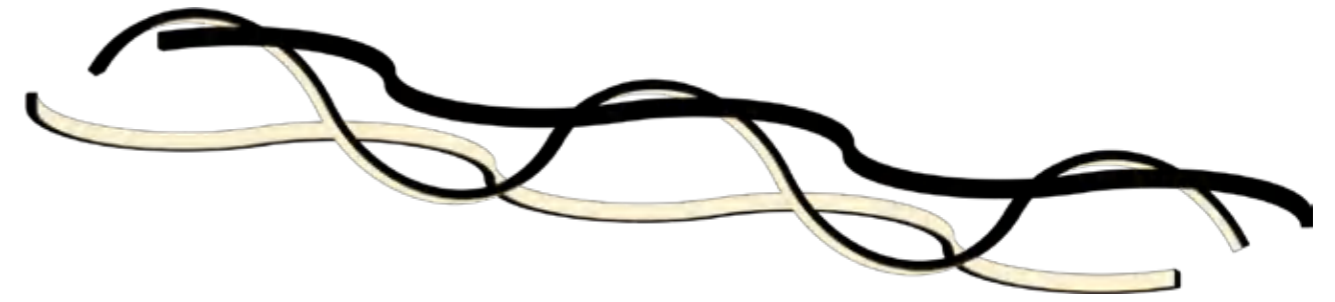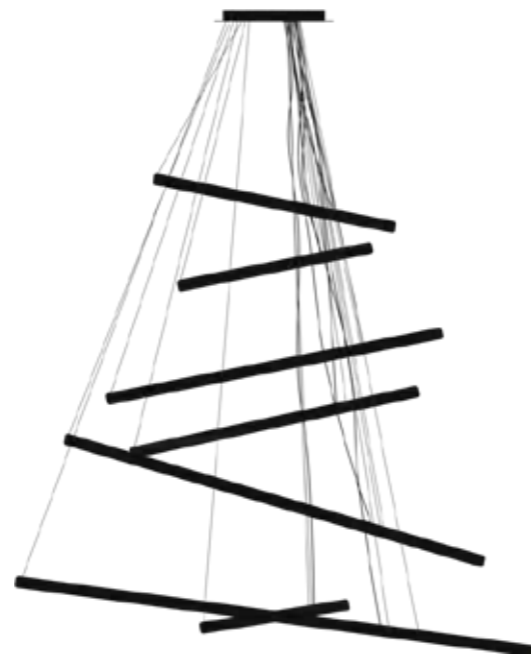

Eg:

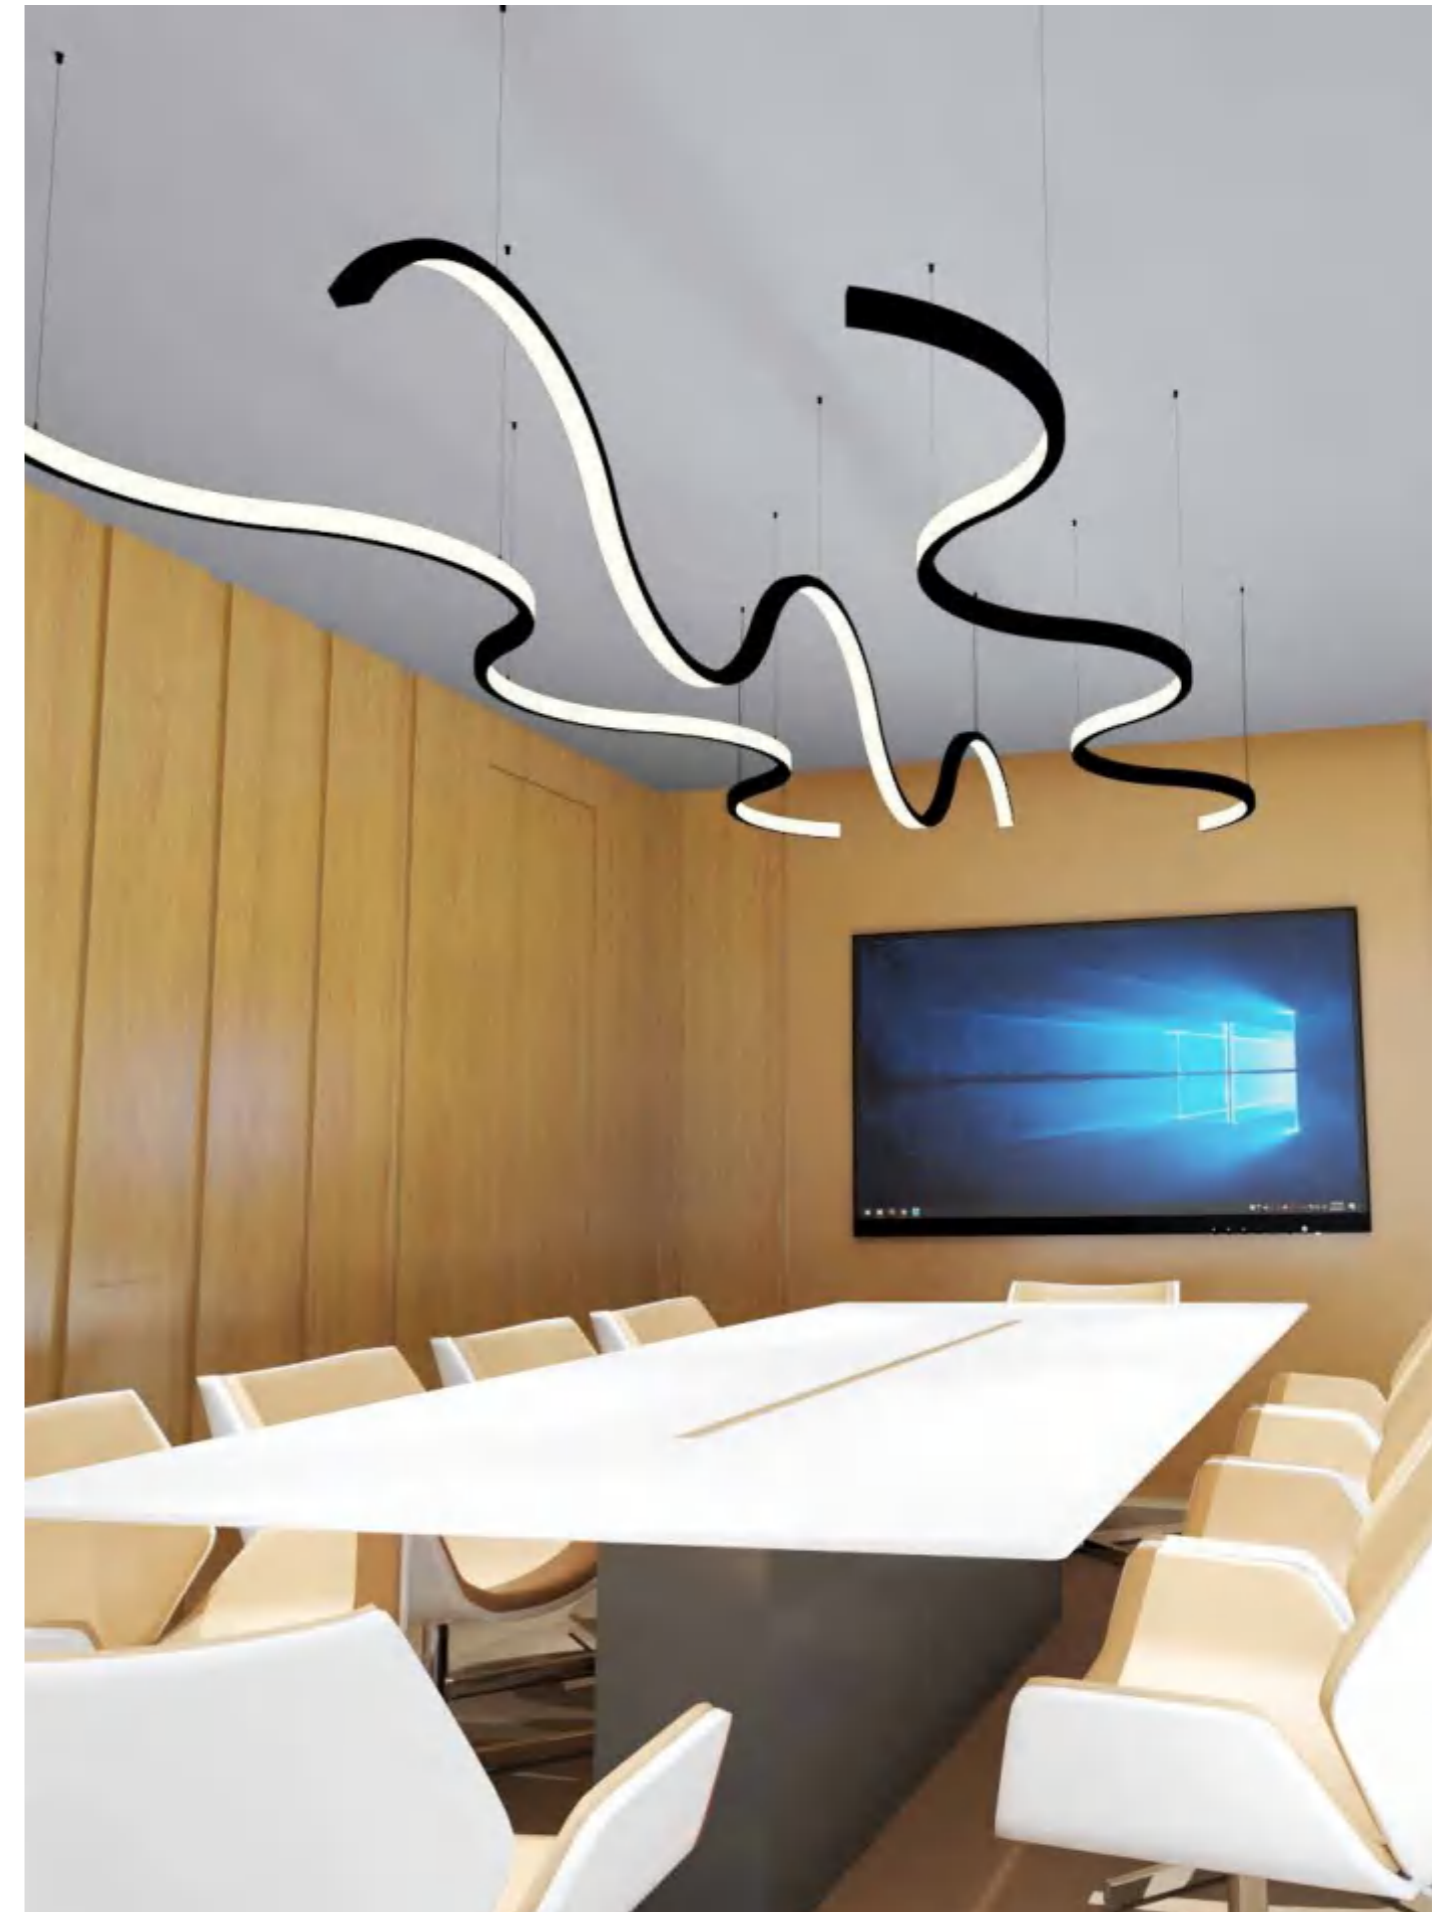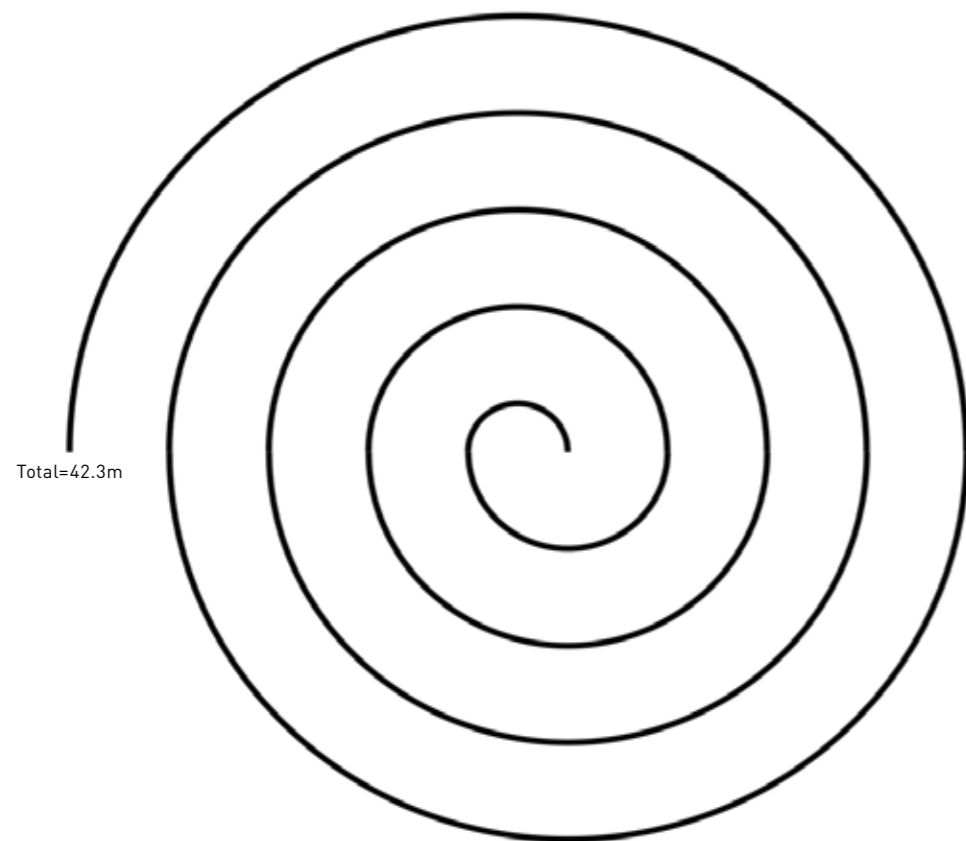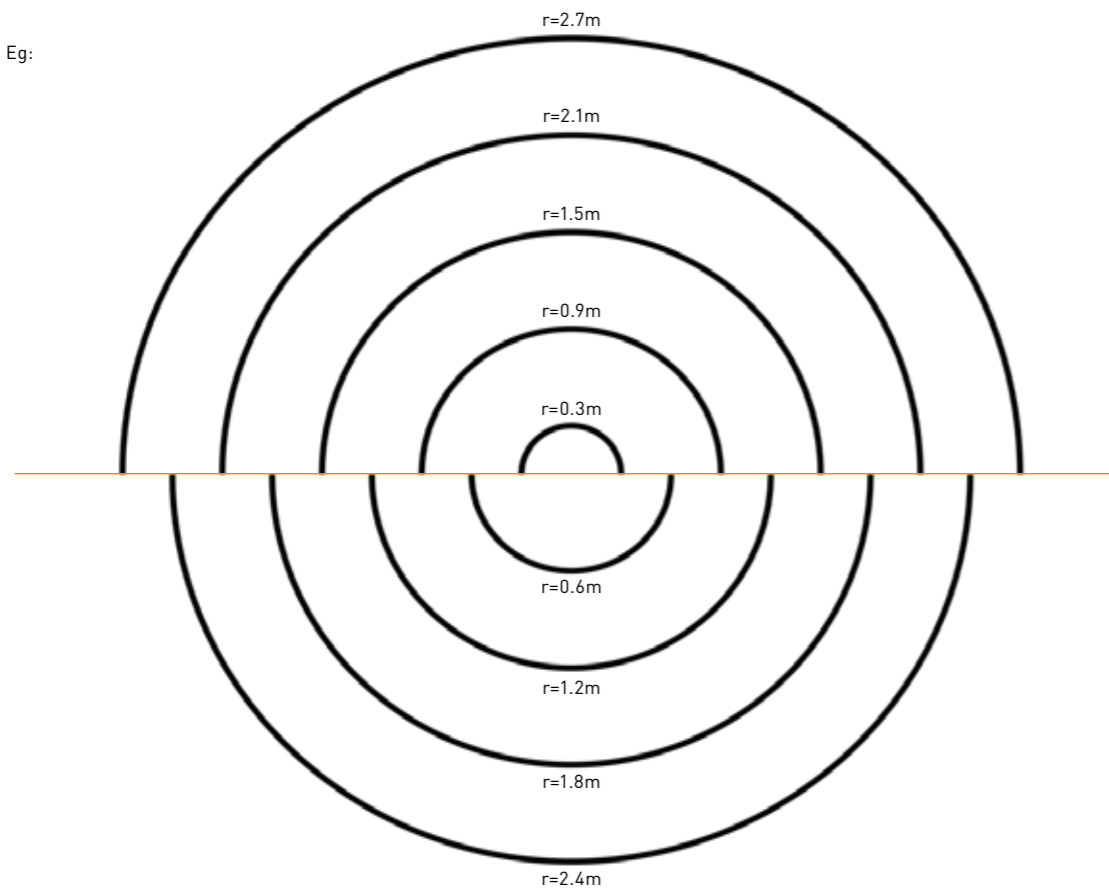

Indirect | L2530

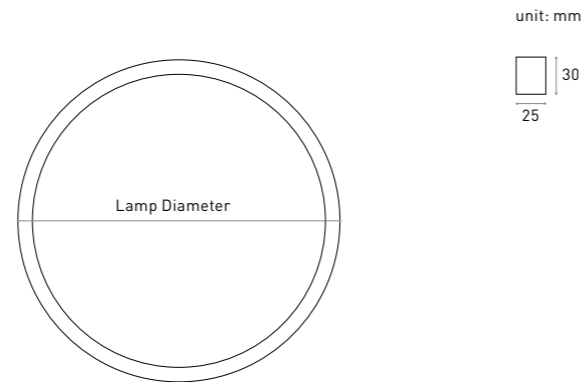


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

Indirect | L3535

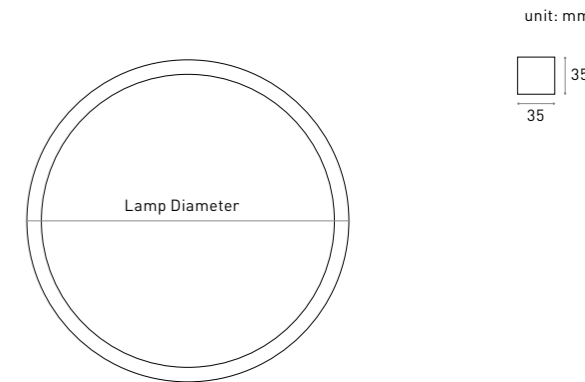

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	10 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE

LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L2530	480	23	900
L2530	640	30	1200
L2530	800	38	1500
L2530	960	45	1800
L2530	1120	53	2100

*Lumens @ 4000K , CRI>80 , PC , Inner



BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	10 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L3535	480	23	900
L3535	640	30	1200
L3535	800	38	1500
L3535	960	45	1800
L3535	1120	53	2100

*Lumens @ 4000K , CRI>80 , PC , Inner

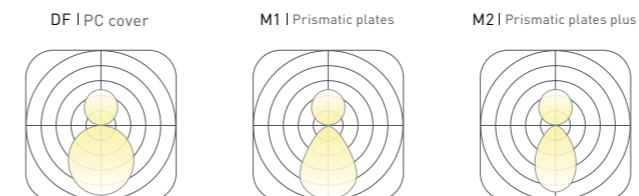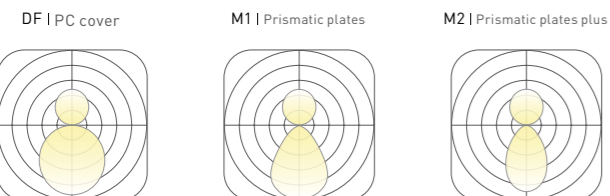

Indirect | L2540

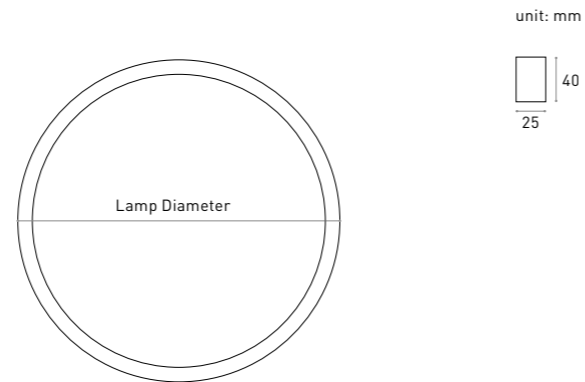

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	10 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L2540	480	23	900
L2540	640	30	1200
L2540	800	38	1500
L2540	960	45	1800
L2540	1120	53	2100

*Lumens @ 4000K , CRI>80 , PC , Inner

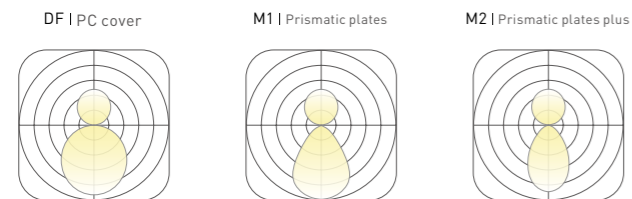

Indirect | L2540 V2.0

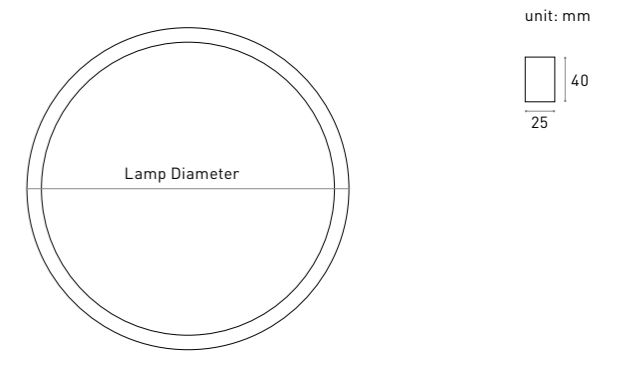

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	10 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L2540	480	23	900
L2540	640	30	1200
L2540	800	38	1500
L2540	960	45	1800
L2540	1120	53	2100

*Lumens @ 4000K , CRI>80 , PC , Inner

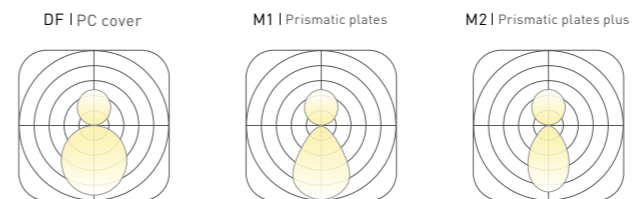

Indirect | L2555

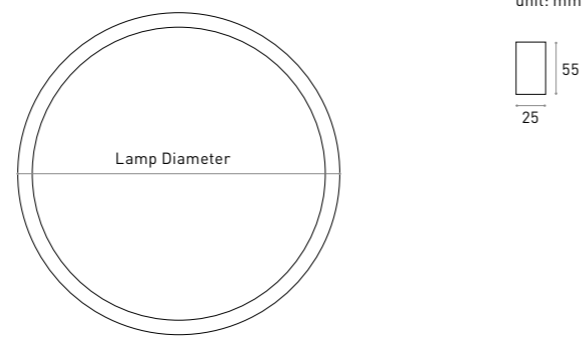


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

Indirect | L3150

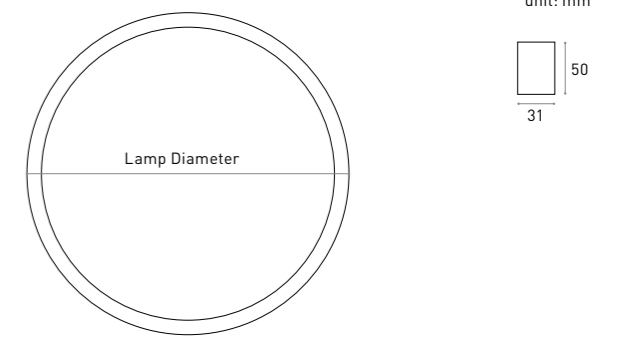

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	10 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE

LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L2555	480	23	900
L2555	640	30	1200
L2555	800	38	1500
L2555	960	45	1800
L2555	1120	53	2100

*Lumens @ 4000K , CRI>80 , PC , Inner



BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	15 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L3150	480	30	1200
L3150	640	40	1600
L3150	800	50	2000
L3150	960	60	2400
L3150	1120	70	2800

*Lumens @ 4000K , CRI>80 , PC , Inner

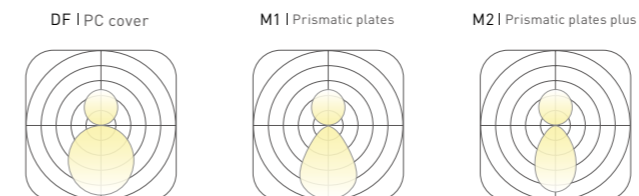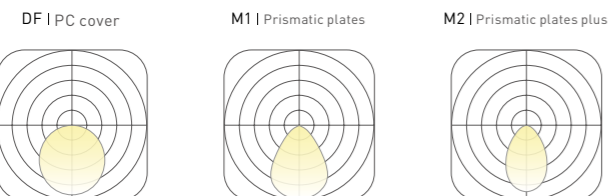

Indirect | L3760

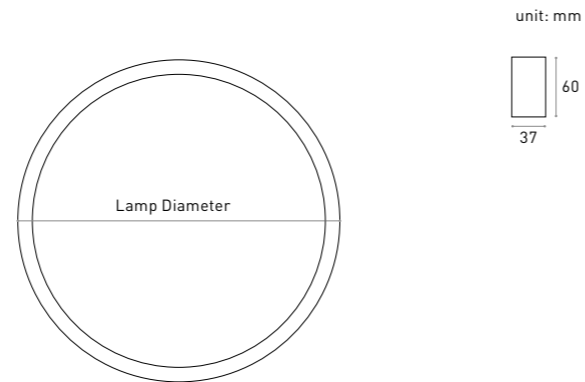

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L3760	480	38	1520
L3760	640	50	2000
L3760	800	63	2500
L3760	960	75	3000
L3760	1120	88	3500

*Lumens @ 4000K , CRI>80 , PC , Inner

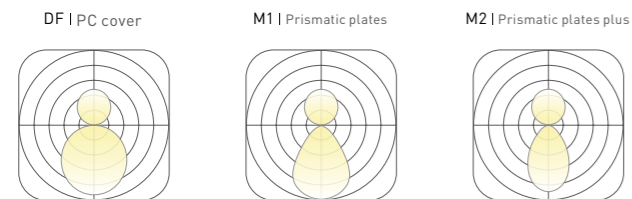

Indirect | L3760 V2.0

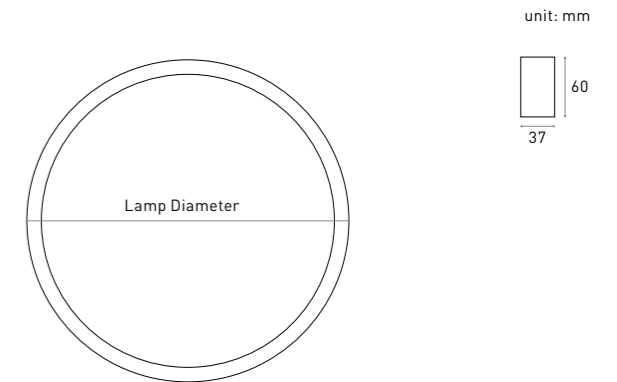

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L3760	480	38	1520
L3760	640	50	2000
L3760	800	63	2500
L3760	960	75	3000
L3760	1120	88	3500

*Lumens @ 4000K , CRI>80 , PC , Inner

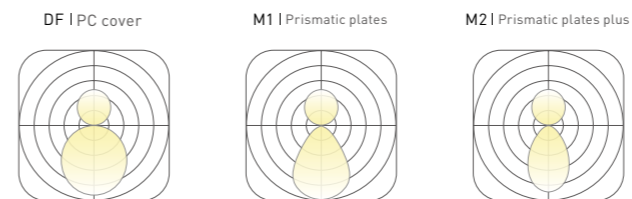

Indirect | L2075

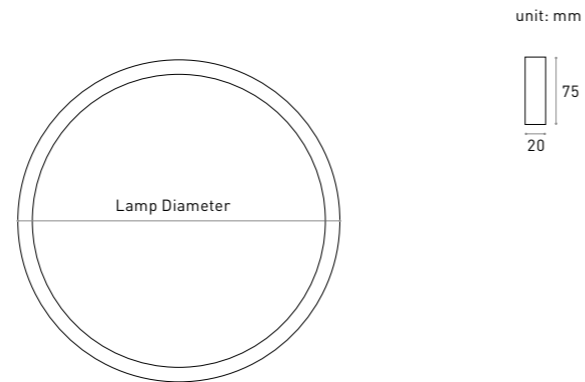


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White




BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	20 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L2075	480	38	1520
L2075	640	50	2000
L2075	800	63	2500
L2075	960	75	3000
L2075	1120	88	3500

*Lumens @ 4000K , CRI>80 , PC , Inner

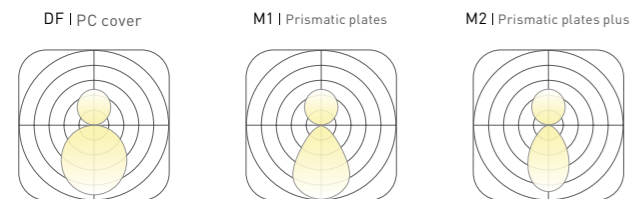

Indirect | L60100

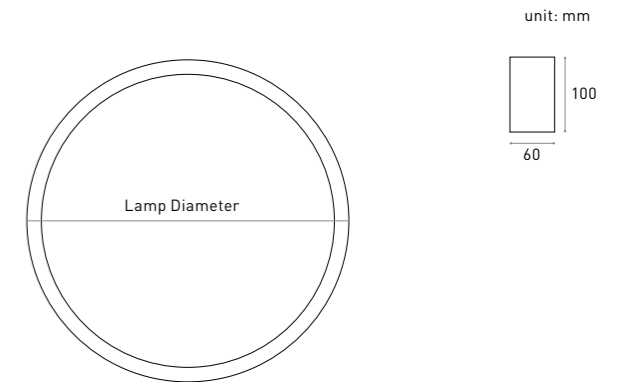


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White




BASIC PARAMETER

Lighting direction	Inner , Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	30 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE



LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L60100	480	46	1840
L60100	640	60	2400
L60100	800	76	3040
L60100	960	90	3600
L60100	1120	106	4240

*Lumens @ 4000K , CRI>80 , PC , Inner

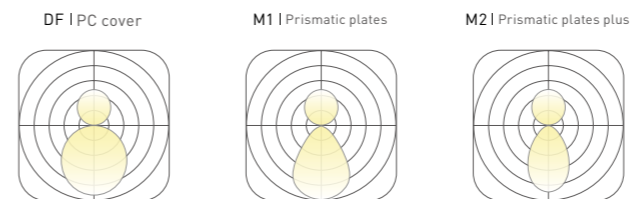

Indirect | L5050

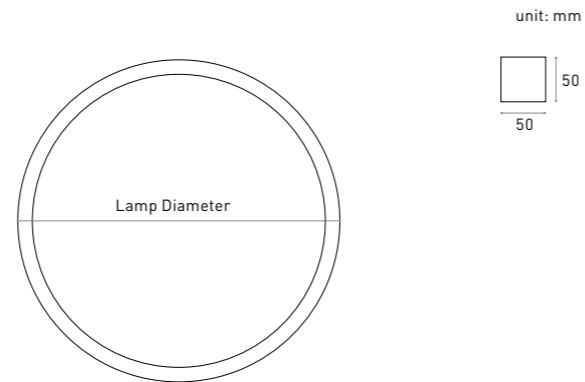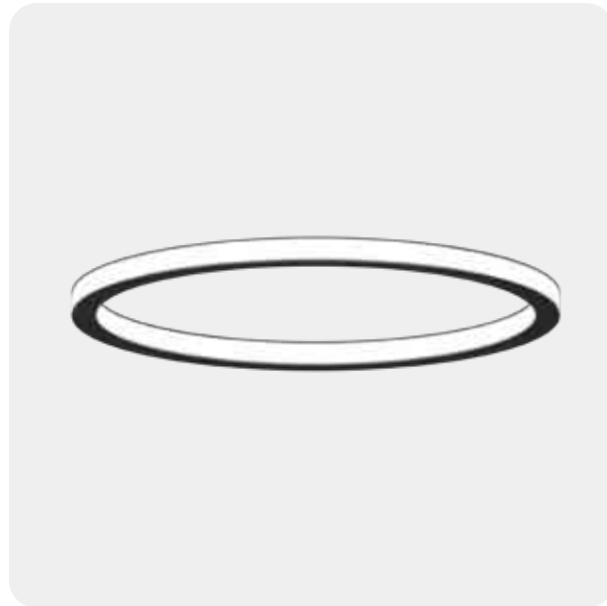

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner&Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	30 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE



LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L5050	526	45	1800
L5050	685	60	2400
L5050	846	75	3000
L5050	1003	90	3600
L5050	1162	105	4200

*Lumens @ 4000K , CRI>80 , PC

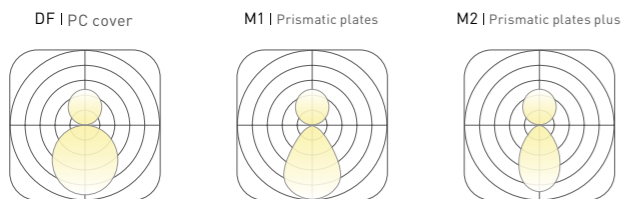

Indirect | L6060

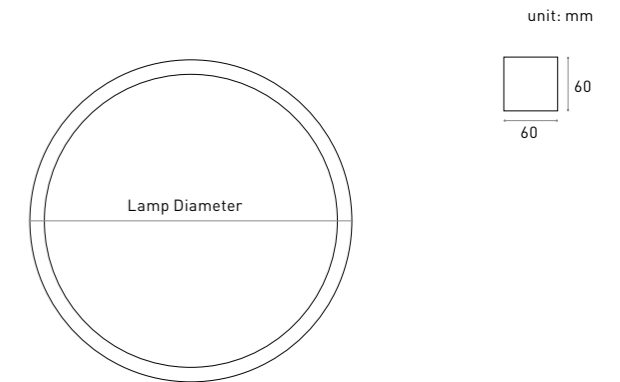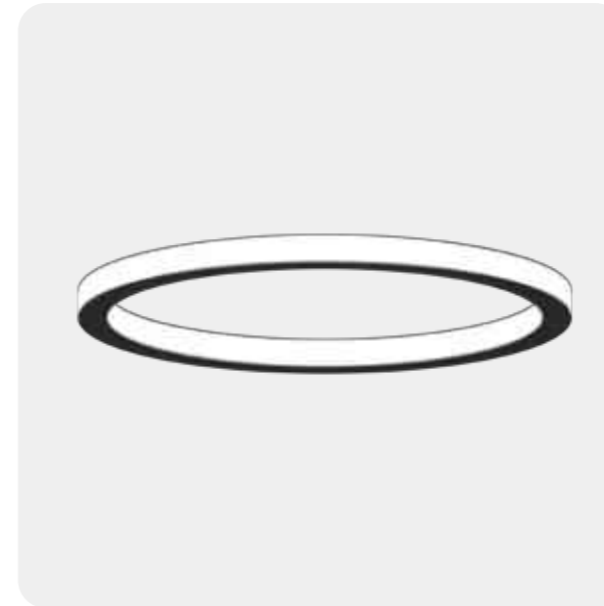

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner&Outer
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Power	40 W/m
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Model	Diameter(mm)	Power (w)	Luminous (lm)
L6060	536	64	2560
L6060	695	84	3360
L6060	856	108	4320
L6060	1013	128	5120
L6060	1172	148	5920

*Lumens @ 4000K , CRI>80 , PC

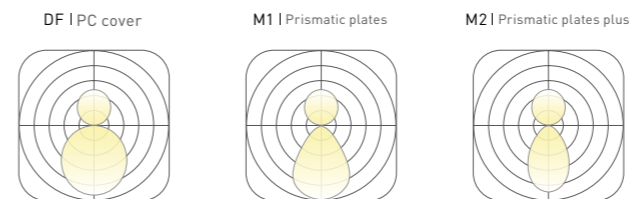

S | Wrapped

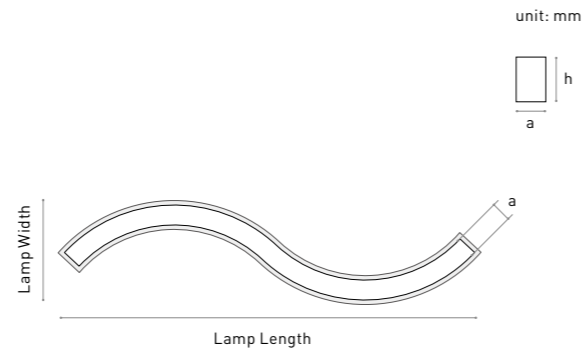

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI ENERGY FREE

LAMPS PARAMETER


a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	610	118	5	500
40	820	148	7.5	750
40	1250	270	13	1300
60	600	131	10	1000
60	895	173	15	1500
80	910	190	15	1500

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting


PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		


DF | PC cover




M1 | Prismatic plates



M2 | Prismatic plates plus



Circle | Wrapped

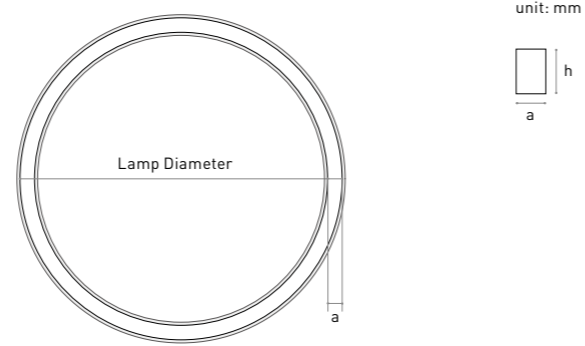


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

Circle | Filled

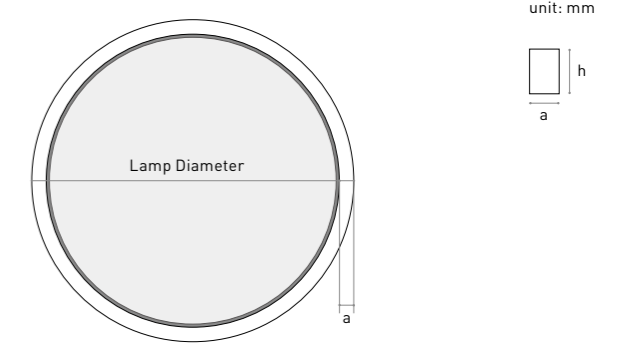

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE

LAMPS PARAMETER

a(mm)	Diameter(mm)	Power (w)	Luminous (lm)
40	450	10	1000
40	600	15	1500
40	740	20	2000
40	900	25	2500
40	1000	30	3000
40	1200	35	3500
60	450	20	2000
60	660	30	3000
60	900	40	4000
60	1060	50	5000
60	1200	60	6000
80	680	30	3000
80	900	50	5000
80	1200	80	8000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE

LAMPS PARAMETER


a(mm)	Diameter(mm)	Power (w)	Luminous (lm)
40	450	10	1000
40	600	15	1500
40	740	20	2000
40	900	25	2500
40	1000	30	3000
40	1200	35	3500
60	450	20	2000
60	660	30	3000
60	900	40	4000
60	1060	50	5000
60	1200	60	6000
80	680	30	3000
80	900	50	5000
80	1200	80	8000

* Lumens @ 4000K , CRI>80 , PC , Down lighting

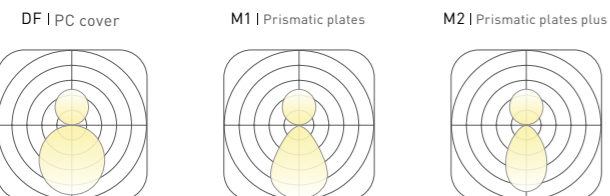

PROFILE


a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

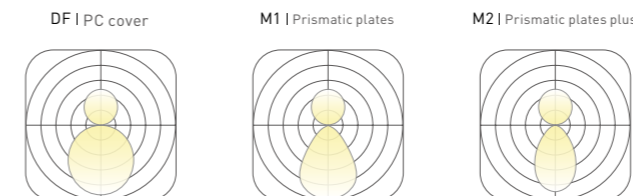

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

Circle | Hat

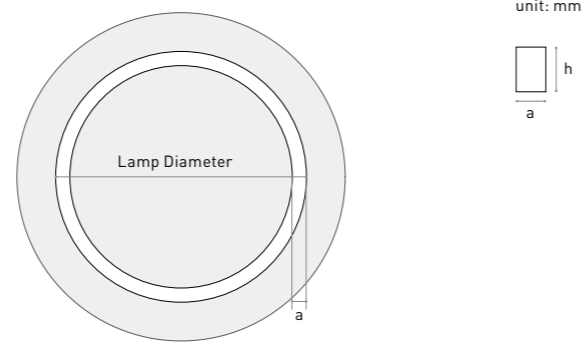

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Diameter(mm)	Power (w)	Luminous (lm)
40	450	10	1000
40	600	15	1500
40	740	20	2000
40	900	25	2500
40	1000	30	3000
60	450	20	2000
60	660	30	3000
60	900	40	4000
60	1060	50	5000
80	680	30	3000
80	900	50	5000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

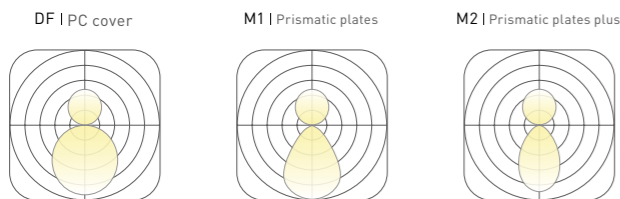

Belief | Wrapped

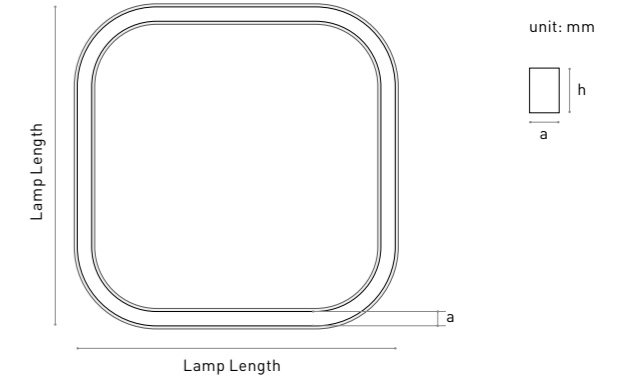

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	900	20	2000
40	1032	25	2500
40	1116	35	3500
40	1200	40	4000
60	900	50	5000
60	1032	60	6000
60	1200	70	7000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

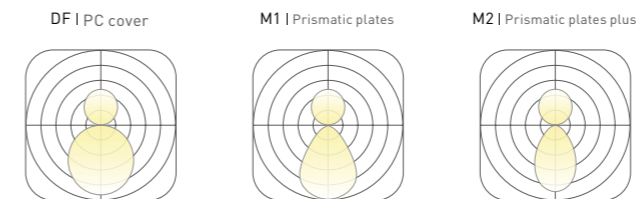

Belief | Filled

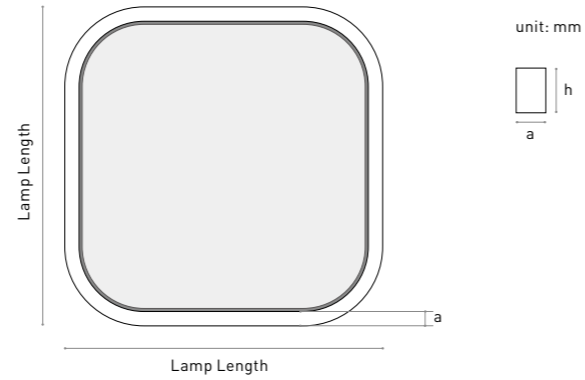


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

Belief | Hat

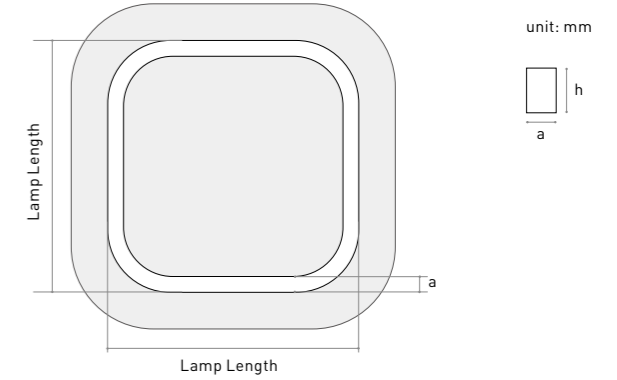

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE

LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	900	20	2000
40	1032	25	2500
40	1116	35	3500
40	1200	40	4000
60	900	50	5000
60	1032	60	6000
60	1200	70	7000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE



LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	900	20	2000
40	1032	25	2500
40	1116	35	3500
60	900	50	5000
60	1032	60	6000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

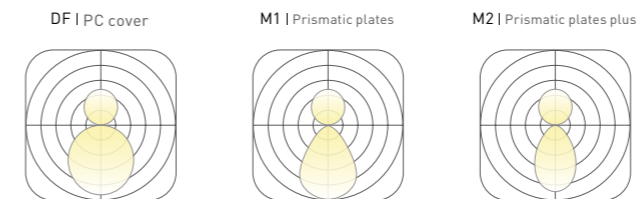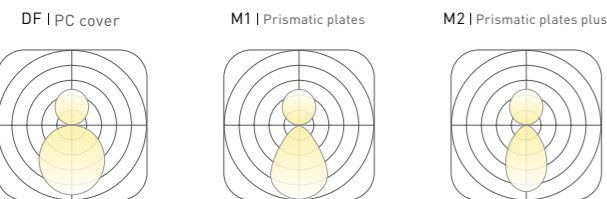

Oval | Wrapped

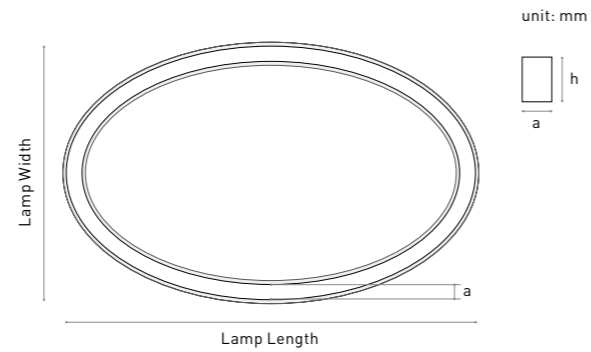

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	900	556	15	1500
40	1050	650	20	2000
40	1200	740	24	2400
40	1340	840	28	2800
40	1500	930	30	3000
40	1650	1020	32	3200
40	1800	1110	35	3500
40	1940	1200	40	4000
60	900	556	30	3000
60	1200	740	40	4000
60	1500	930	50	5000
60	1730	1070	70	7000
60	1940	1200	80	8000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

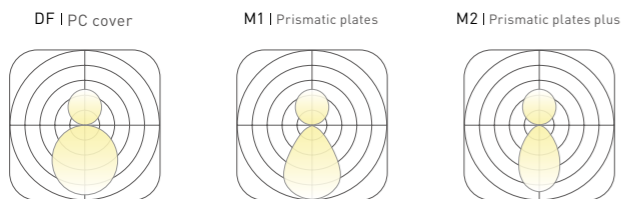

Oval | Filled

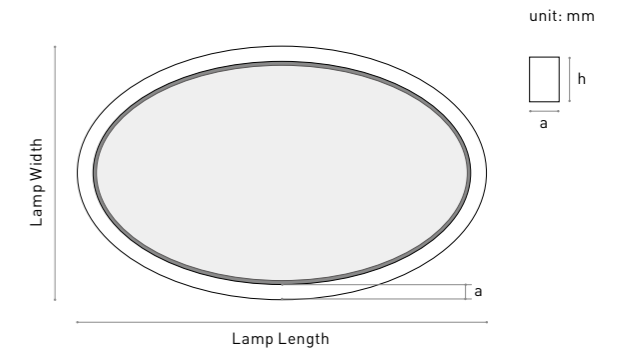

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	900	556	15	1500
40	1050	650	20	2000
40	1200	740	24	2400
40	1340	840	28	2800
40	1500	930	30	3000
40	1650	1020	32	3200
40	1800	1110	35	3500
40	1940	1200	40	4000
60	900	556	30	3000
60	1200	740	40	4000
60	1500	930	50	5000
60	1730	1070	70	7000
60	1940	1200	80	8000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

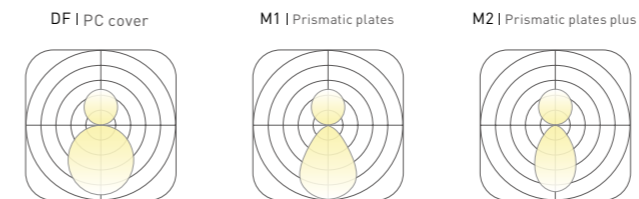

Oval | Hat

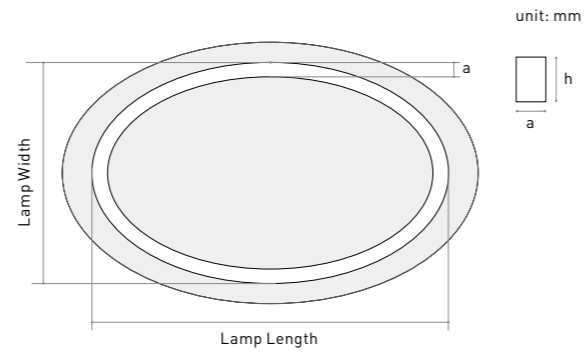

COLOURS Choose from three color libraries

Acoustic Click to library **Profile** Click to library

HL-04 HL-05 HL-06 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	900	556	15	1500
40	1050	650	20	2000
60	900	556	30	3000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

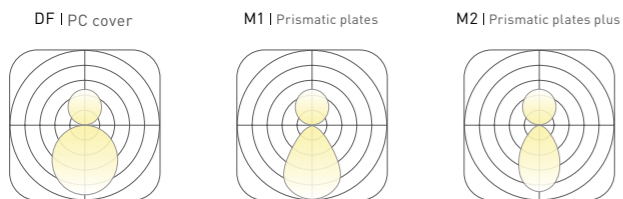

Eye | Wrapped

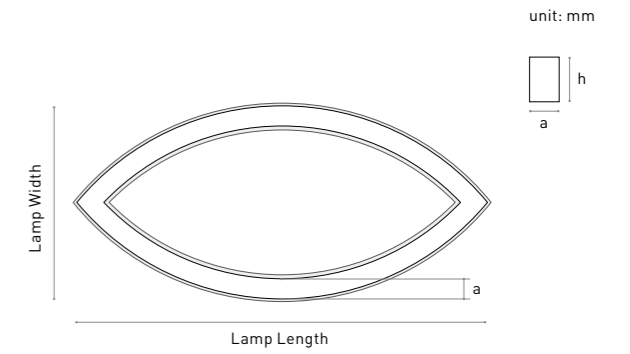

COLOURS Choose from three color libraries

Acoustic Click to library **Texture** Click to library **Profile** Click to library

HL-04 HL-05 HL-06 TE-03 TE-04 TE-05 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
60	600	229	20	2000
60	900	406	30	3000
60	1200	563	40	4000
60	1500	648	50	5000
60	1800	783	60	6000
60	2000	744	70	7000
60	2400	897	80	8000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

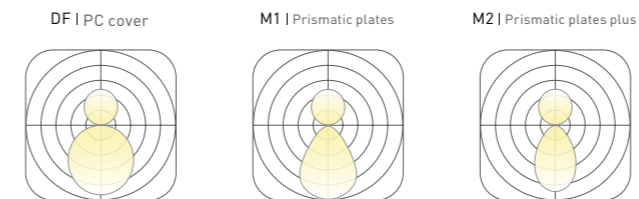

Eye | Filled

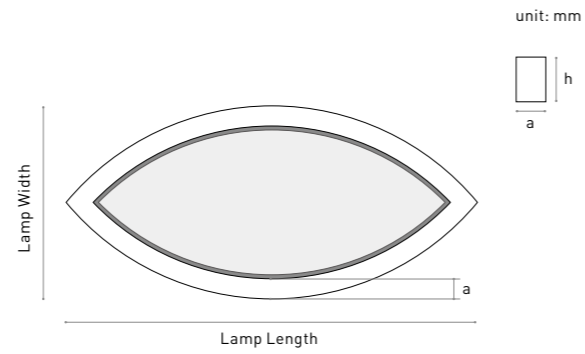

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
60	600	229	20	2000
60	900	406	30	3000
60	1200	563	40	4000
60	1500	648	50	5000
60	1800	783	60	6000
60	2000	744	70	7000
60	2400	897	80	8000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

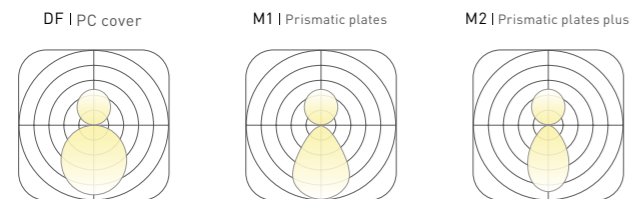

Eye | Hat

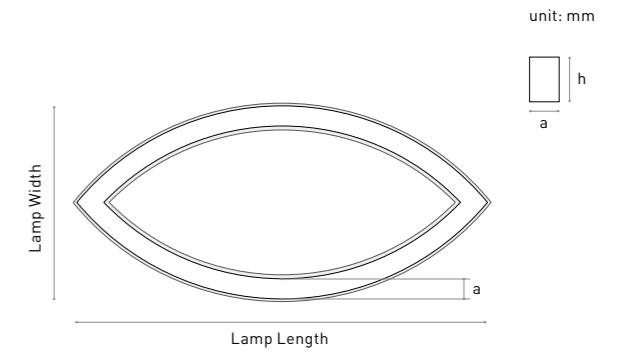

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
60	600	229	20	2000
60	900	406	30	3000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting


PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

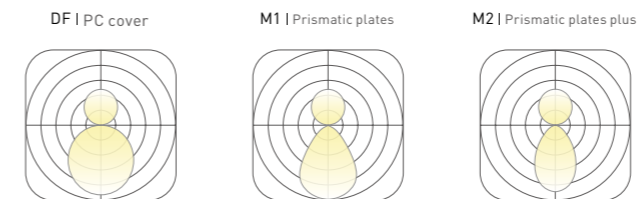



Galaxy | Wrapped

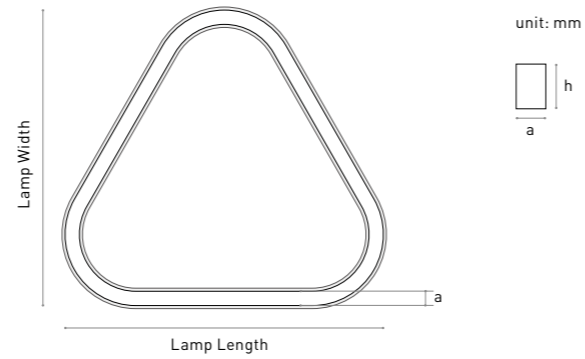

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	559	15	1500
40	900	833	20	2000
40	1200	1099	30	3000
60	600	559	30	3000
60	900	833	40	4000
60	1200	1099	60	6000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

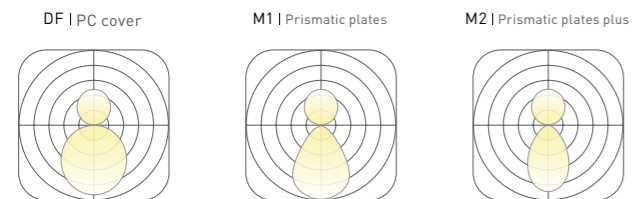

Galaxy | Filled

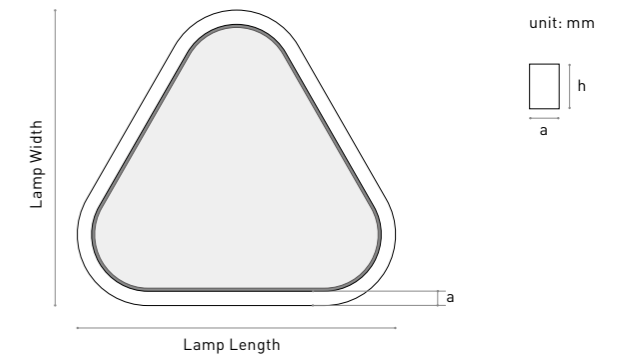

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	559	15	1500
40	900	833	20	2000
40	1200	1099	30	3000
60	600	559	30	3000
60	900	833	40	4000
60	1200	1099	60	6000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

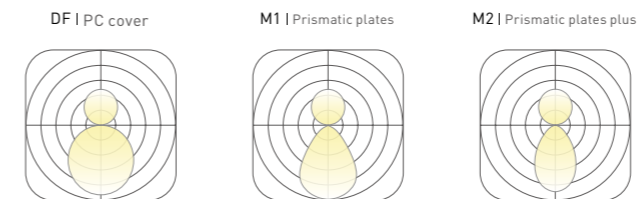

Galaxy | Hat

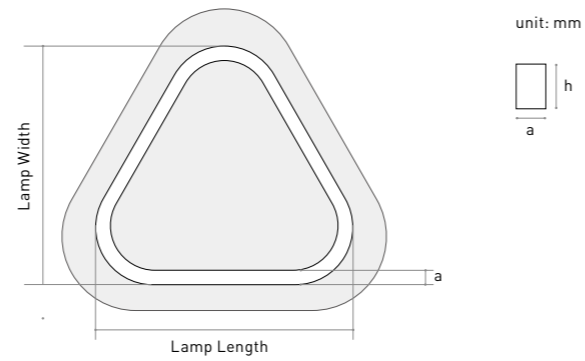

COLOURS Choose from three color libraries

Acoustic Click to library **Profile** Click to library

HL-04 HL-05 HL-06 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE

LAMPS PARAMETER


a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	559	15	1500
40	900	833	20	2000
60	600	559	30	3000
60	900	833	40	4000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting


PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		


DF | PC cover




M1 | Prismatic plates



M2 | Prismatic plates plus



Faith | Wrapped

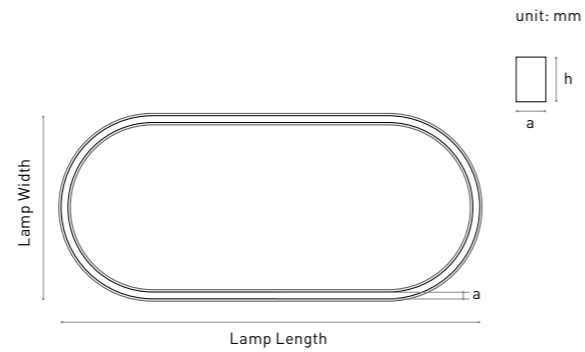

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	1250	450	28	2800
40	1500	600	36	3600
40	1740	740	42	4200
40	2000	900	50	5000
40	2300	1000	58	5800
40	2700	1200	68	6800
60	1350	450	60	6000
60	1660	660	74	7400
60	2100	900	92	9200
60	2460	1060	110	11000
60	2800	1200	128	12800
80	1680	680	126	12600
80	2100	900	156	15600
80	2800	1200	204	20400


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

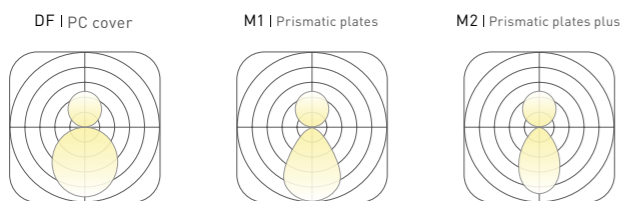

Faith | Filled

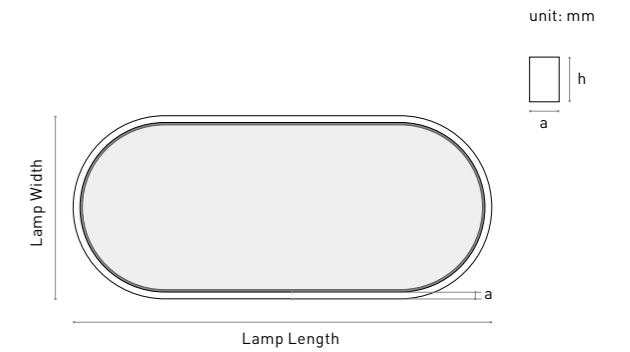

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	1250	450	28	2800
40	1500	600	36	3600
40	1740	740	42	4200
40	2000	900	50	5000
40	2300	1000	58	5800
40	2700	1200	68	6800
60	1350	450	60	6000
60	1660	660	74	7400
60	2100	900	92	9200
60	2460	1060	110	11000
60	2800	1200	128	12800
80	1680	680	126	12600
80	2100	900	156	15600
80	2800	1200	204	20400



*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

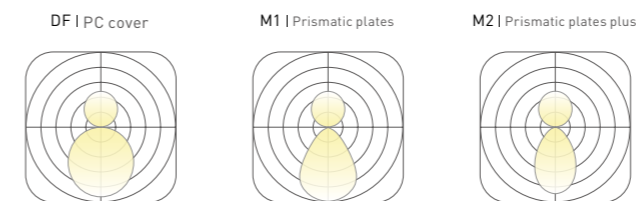

Line | Wrapped

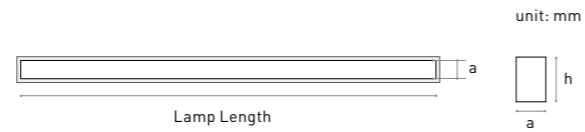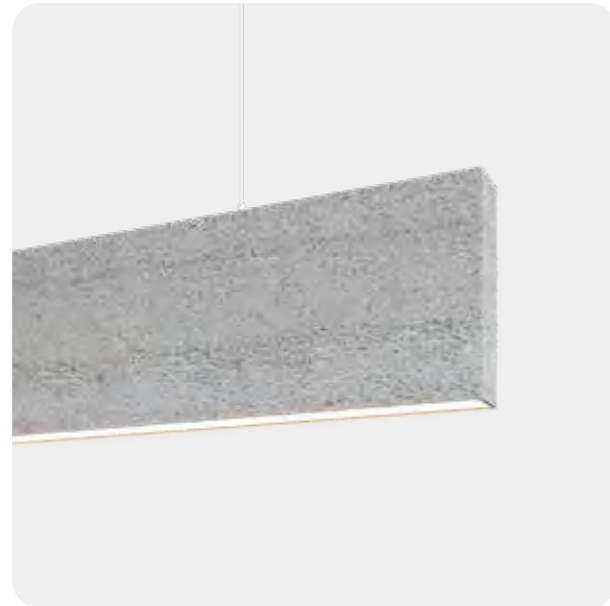

PROFILE											
a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

COLOURS Choose from three color libraries

Acoustic Click to library HL-04 HL-05 HL-06

Texture Click to library TE-03 TE-04 TE-05


Profile Click to library Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	500	4	400
40	600	4.5	450
40	900	7	700
40	1000	7.5	750
40	1200	9	900
40	1500	11.5	1150
40	1800	14	1400
40	2000	15.5	1550
60	500	9	900
60	600	10	1000
60	900	16	1600
60	1000	17	1700
60	1200	21	2100
60	1500	26	2600
60	1800	31	3100
60	2000	35	3500
80	500	13	1300
80	600	16	1600
80	900	24	2400
80	1000	27	2700
80	1200	32	3200
80	1500	41	4100
80	1800	49	4900
80	2000	54	5400

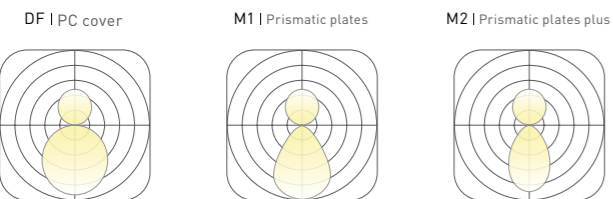



Hexagon | Wrapped

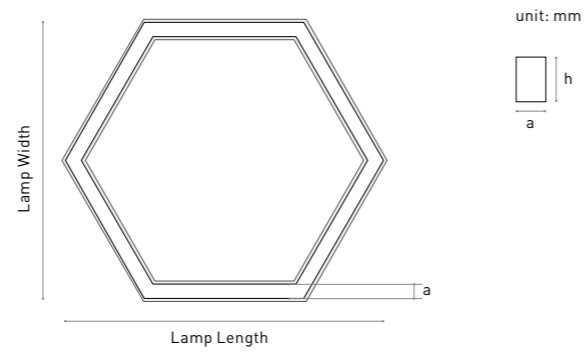

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	519	13	1300
40	900	779	17	1700
40	1200	1039	20	2000
60	750	649	30	3000
60	900	779	30	3000
60	1050	909	45	4500
60	1200	1039	60	6000
80	796	689	60	6000
80	1096	949	80	8000



*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

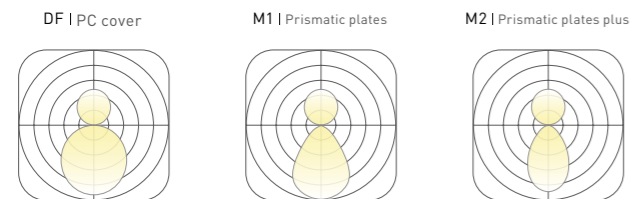

Hexagon | Filled

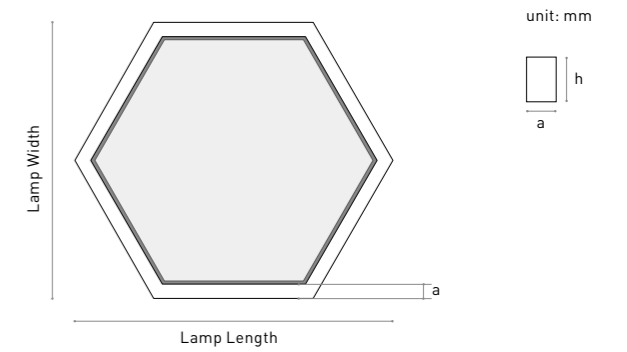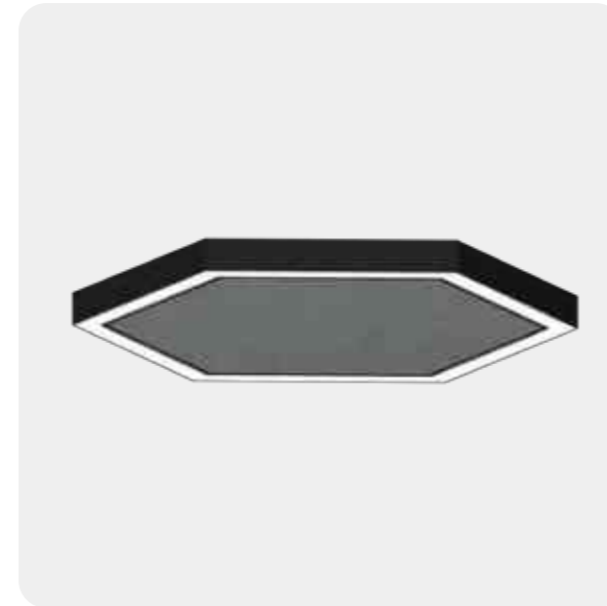

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	519	13	1300
40	900	779	17	1700
40	1200	1039	20	2000
60	750	649	30	3000
60	900	779	30	3000
60	1050	909	45	4500
60	1200	1039	60	6000
80	796	689	60	6000
80	1096	949	80	8000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

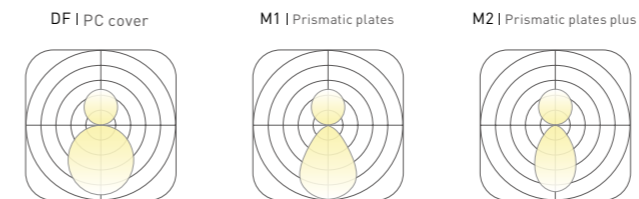

Hexagon | Hat

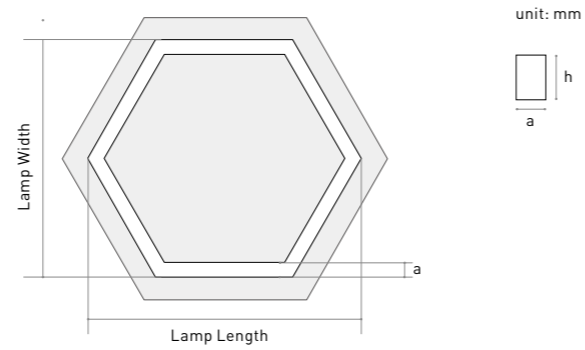

COLOURS Choose from three color libraries

Acoustic Click to library **Profile** Click to library

HL-04 HL-05 HL-06 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	519	13	1300
40	900	779	17	1700
60	750	649	30	3000
60	900	779	30	3000
60	1050	909	45	4500
80	796	689	60	6000
80	1096	949	80	8000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

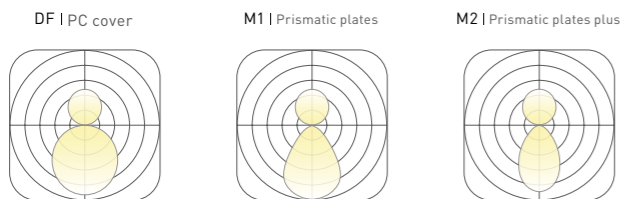

Rhombus | Wrapped

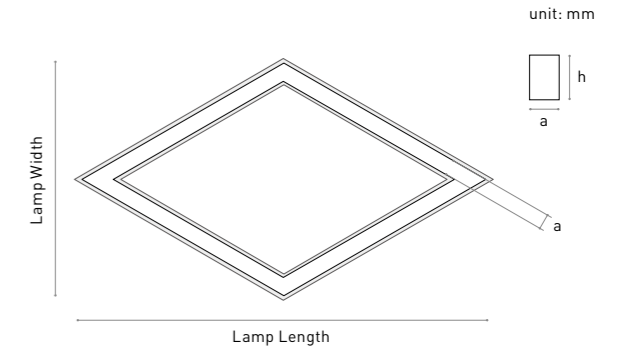

COLOURS Choose from three color libraries

Acoustic Click to library **Texture** Click to library **Profile** Click to library

HL-04 HL-05 HL-06 TE-03 TE-04 TE-05 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	848	489	15	1500
40	1024	591	18	1800
40	1200	692	20	2000
60	848	489	30	3000
60	1200	692	50	5000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

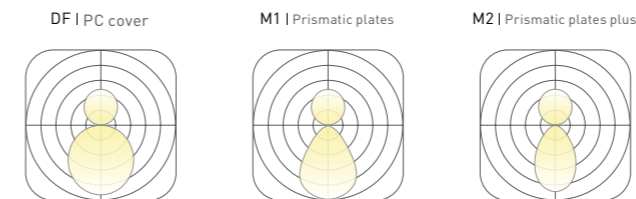

Rhombus | Filled

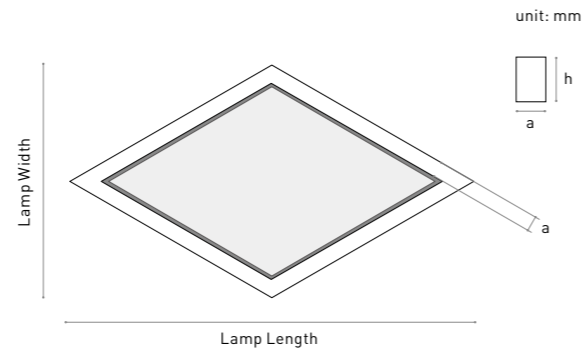

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	848	489	15	1500
40	1024	591	18	1800
40	1200	692	20	2000
60	848	489	30	3000
60	1200	692	50	5000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

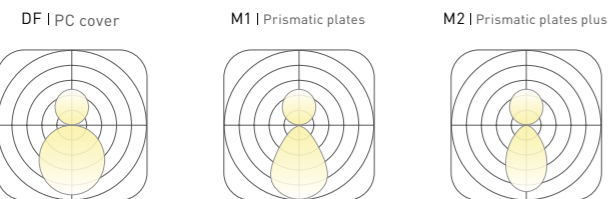

Rhombus | Hat

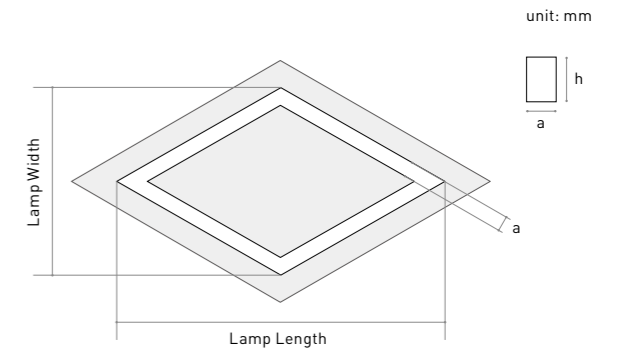

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	848	489	15	1500
40	1024	591	18	1800
60	848	489	30	3000
60	1200	692	50	5000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

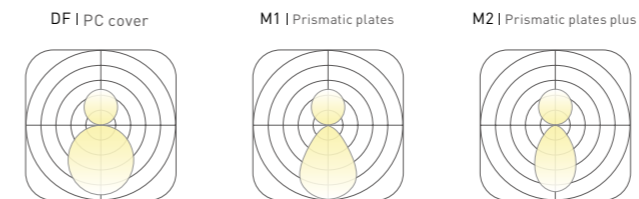

Quadrate | Wrapped

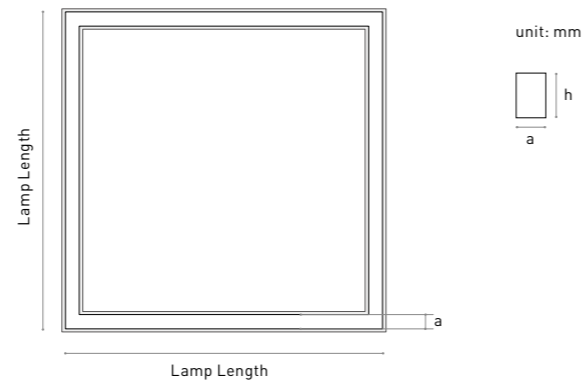


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

Quadrate | Filled

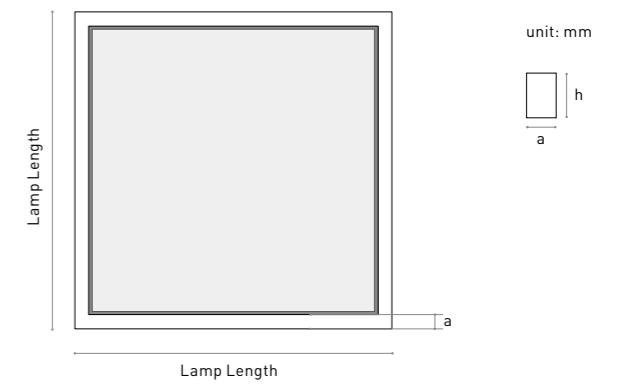

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	600	15	1500
40	692	20	2000
40	776	24	2400
40	900	27	2700
40	992	30	3000
40	1076	35	3500
40	1200	40	4000
60	600	40	4000
60	816	55	5500
60	900	60	6000
60	1116	70	7000
60	1200	80	8000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

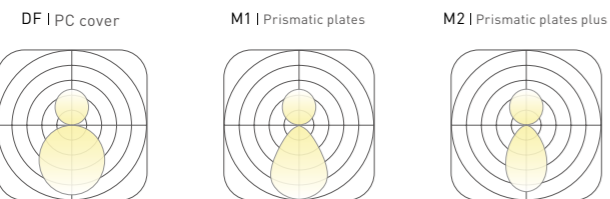

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	600	15	1500
40	692	20	2000
40	776	24	2400
40	900	27	2700
40	992	30	3000
40	1076	35	3500
40	1200	40	4000
60	600	40	4000
60	816	55	5500
60	900	60	6000
60	1116	70	7000
60	1200	80	8000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

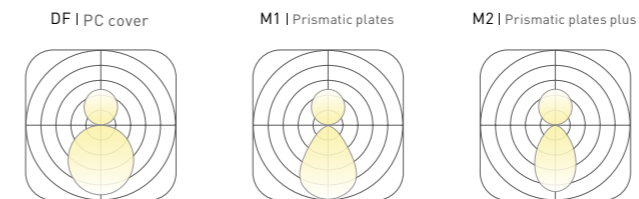

Quadrate | Hat

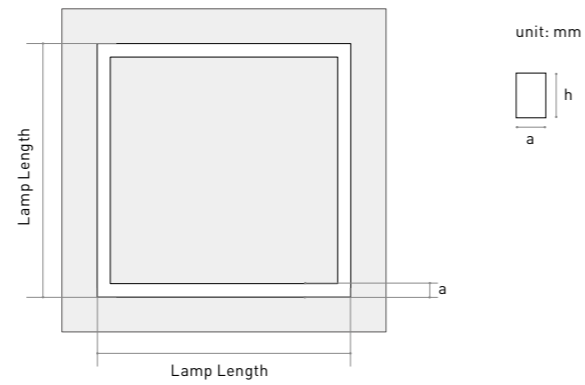

COLOURS Choose from three color libraries

Acoustic [Click to library](#) Profile [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
40	600	15	1500
40	692	20	2000
40	776	24	2400
40	900	27	2700
40	992	30	3000
40	1076	35	3500
60	600	40	4000
60	816	55	5500
60	900	60	6000
60	1116	70	7000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

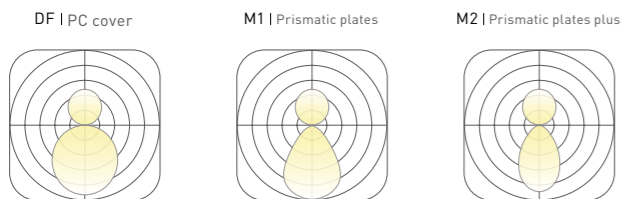

Triangle | Wrapped

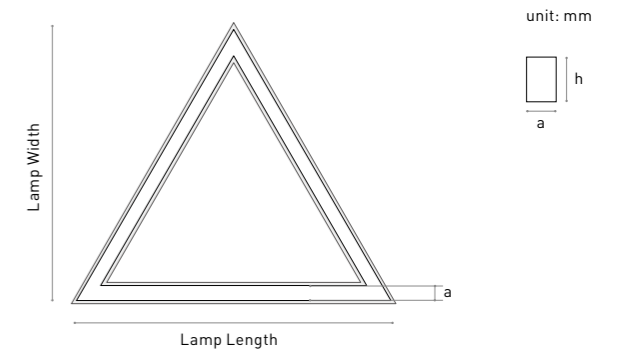

COLOURS Choose from three color libraries

Acoustic [Click to library](#) Texture [Click to library](#) Profile [Click to library](#)

HL-04 HL-05 HL-06 TE-03 TE-04 TE-05 Silver Black White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	520	13	1300
40	755	653	15	1500
40	900	779	20	2000
40	1055	913	25	2500
40	1200	1039	30	3000
60	600	520	30	3000
60	900	779	50	5000
60	1200	1039	60	6000


*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

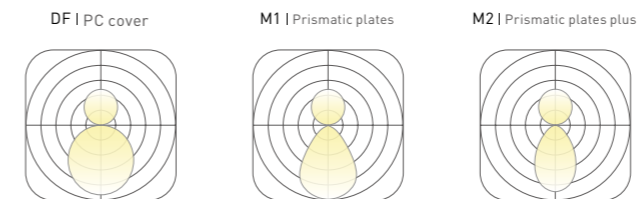

Triangle | Filled

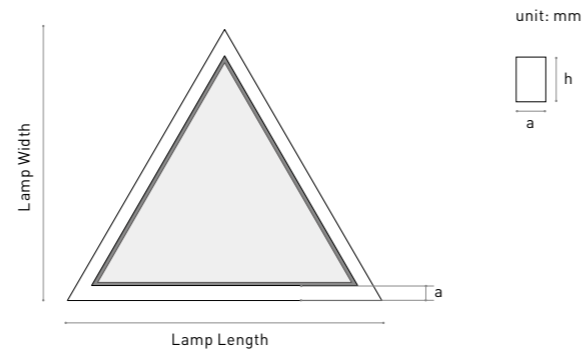

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	520	13	1300
40	755	653	15	1500
40	900	779	20	2000
40	1055	913	25	2500
40	1200	1039	30	3000
60	600	520	30	3000
60	900	779	50	5000
60	1200	1039	60	6000


*Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

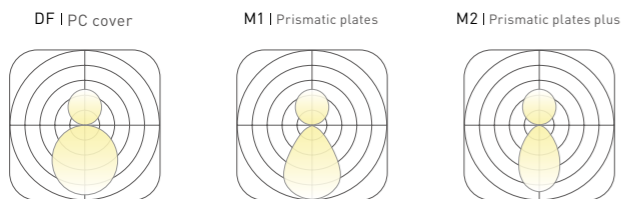

Triangle | Hat

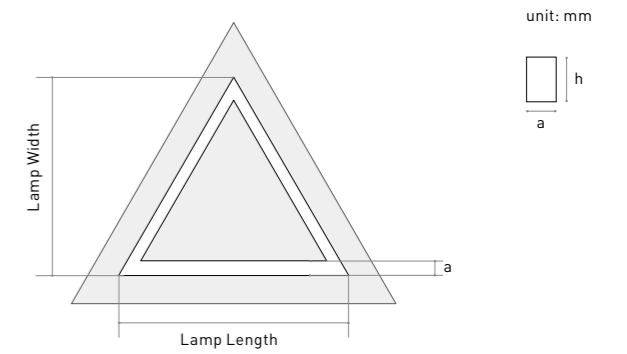

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Profile Click to library: Silver, Black, White

BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
40	600	520	13	1300
40	755	653	15	1500
40	900	779	20	2000
40	1055	913	25	2500
60	600	520	30	3000
60	900	779	50	5000



*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

PROFILE

a(mm)	25	35	40	50	60	70	80	90	100	110	120
h(mm)	25	35	40	60	80	100	120	150	200		

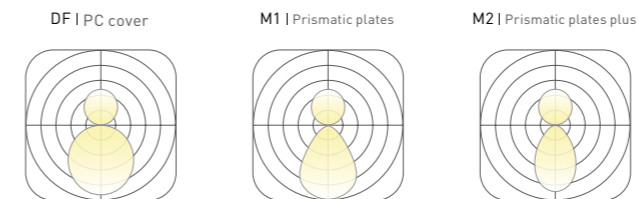

Lens | Line

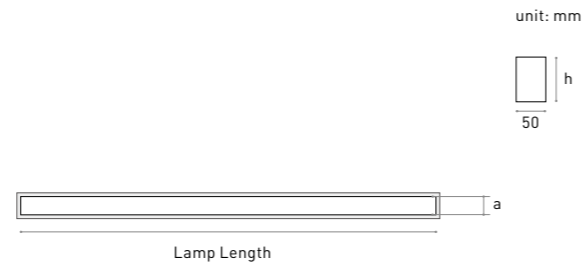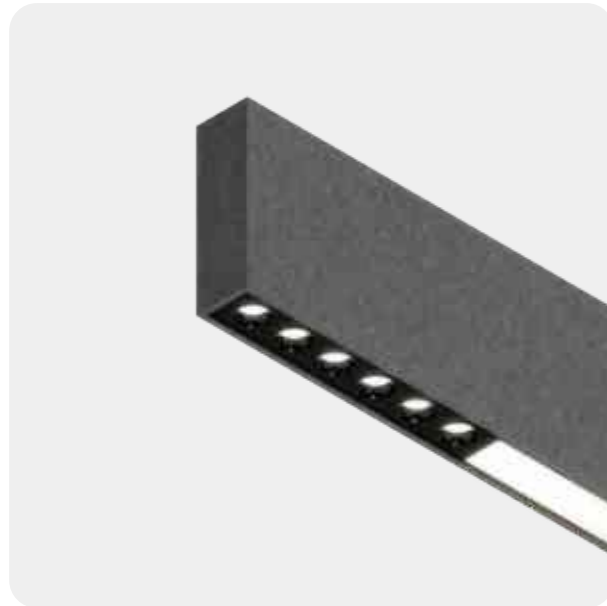


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White




BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Lamp hight	60-200mm
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	500	9	900
50	600	10	1000
50	900	16	1600
50	1000	17	1700
50	1200	21	2100
50	1500	26	2600
50	1800	31	3100
50	2000	35	3500

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

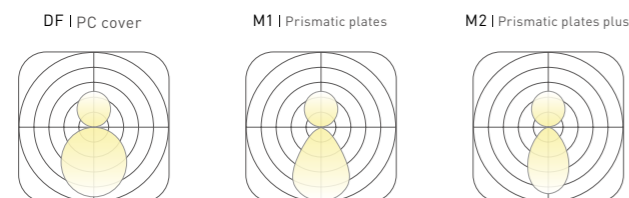

Lens | S

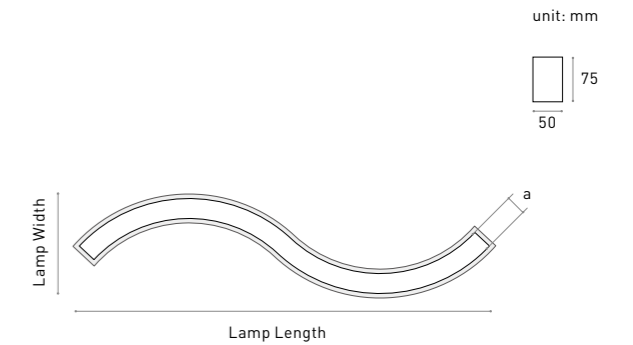


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White




BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE

LAMPS PARAMETER


a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	600	131	10	1000
50	895	173	15	1500
50	1510	333	27	2700
50	1785	388	34	3400
50	2030	435	40	4000
50	2165	353	40	4000
50	2590	413	55	5500
50	2875	453	60	6000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

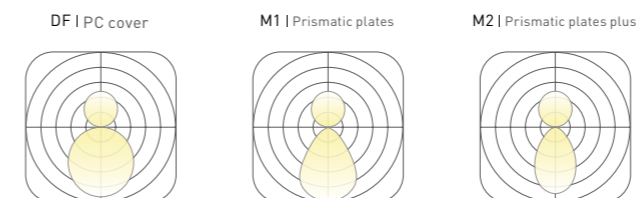



Lens | Circle

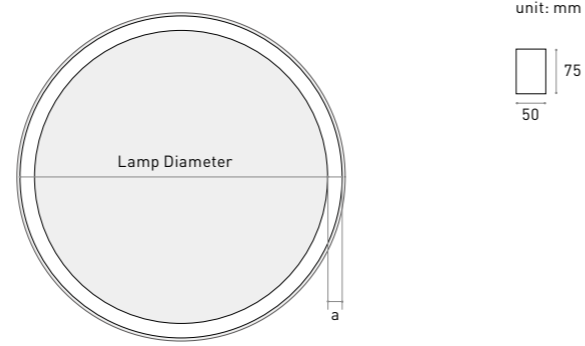

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White




BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE



LAMPS PARAMETER

a(mm)	Diameter(mm)	Power (w)	Luminous (lm)
50	450	20	2000
50	600	30	3000
50	900	40	4000
50	1000	50	5000
50	1200	60	6000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

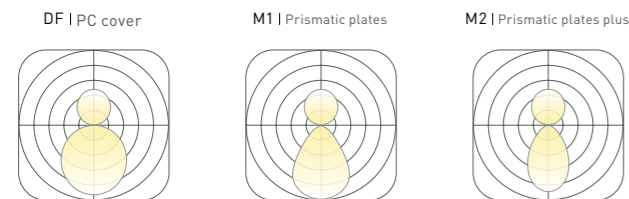

Lens | Triangle

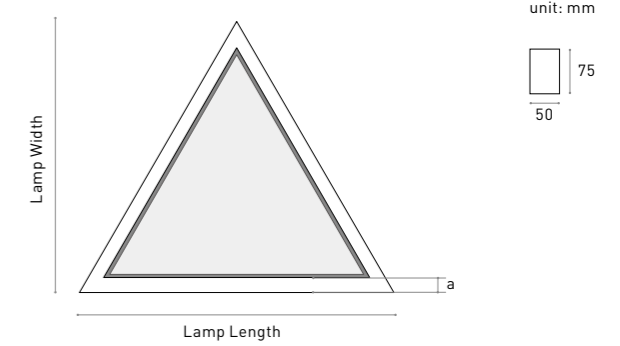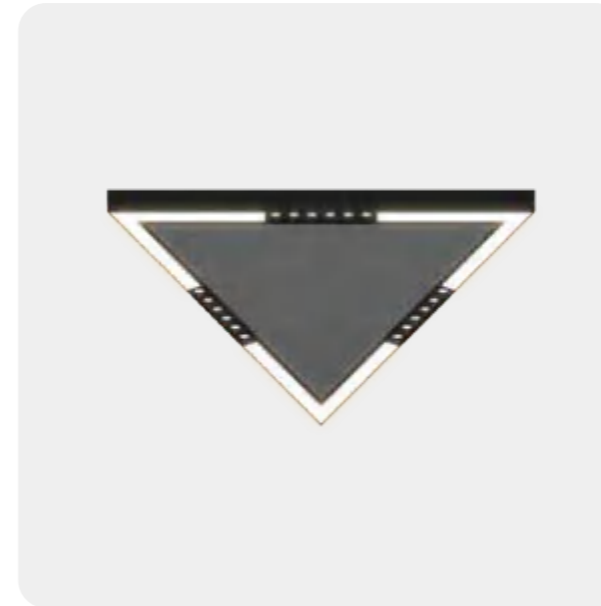


COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White




BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	600	520	30	3000
50	900	779	50	5000
50	1200	1039	60	6000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

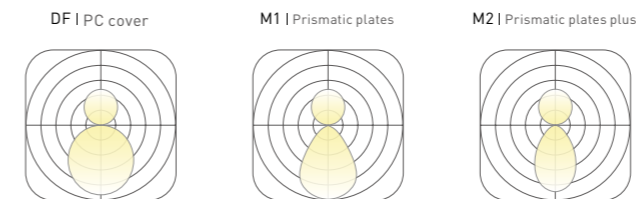

Lens | Galaxy

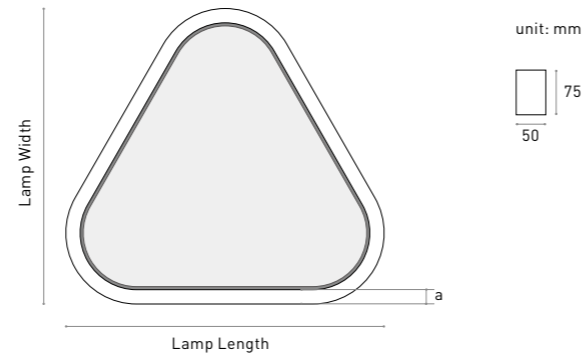

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE



LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	600	560	30	3000
50	900	833	40	4000
50	1200	1100	60	6000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

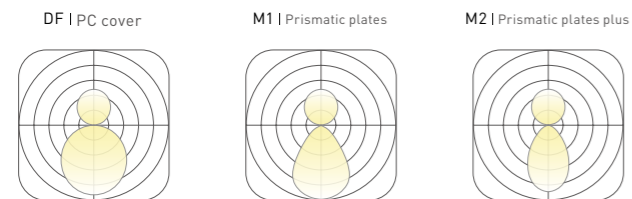

Lens | Quadrate

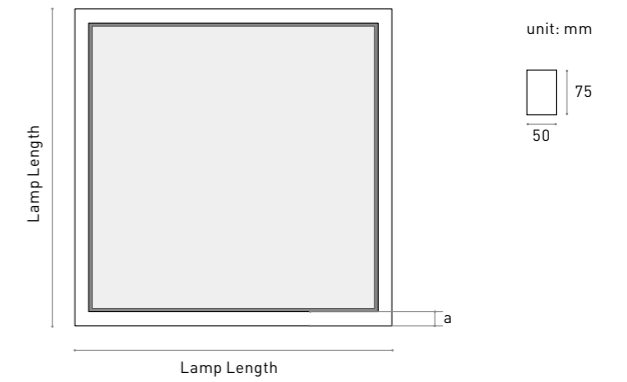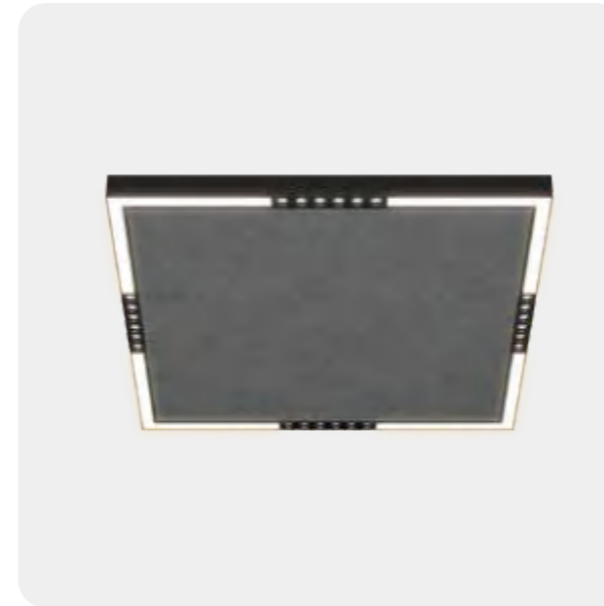

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	600	40	4000
50	816	55	5500
50	900	60	6000
50	1116	70	7000
50	1200	80	8000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

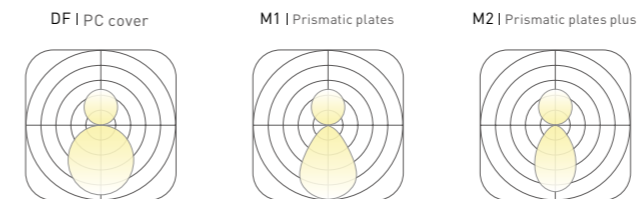

Lens | Belief

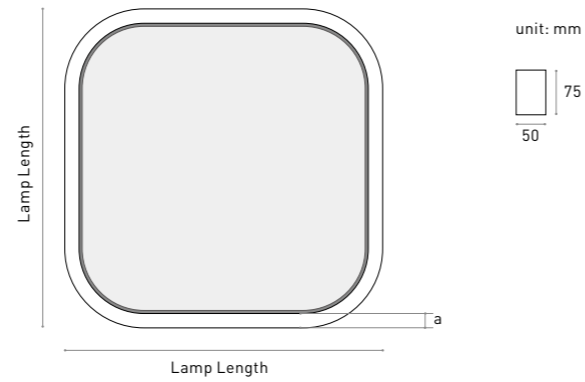

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	900	50	5000
50	1032	60	6000
50	1116	70	7000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

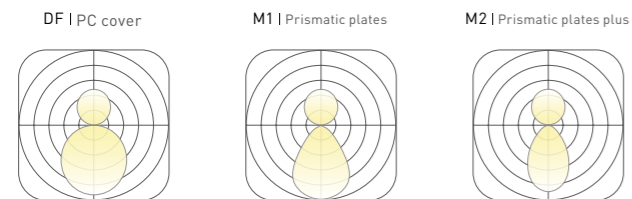

Lens | Faith

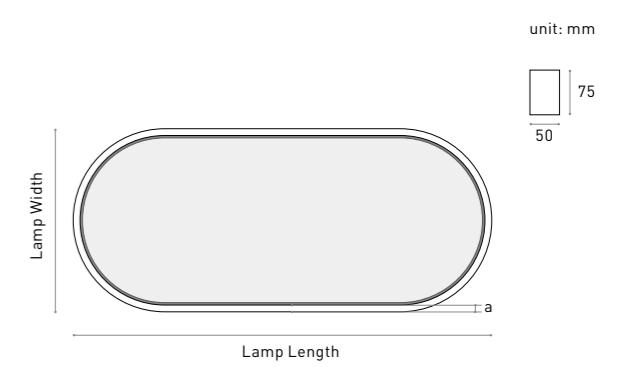

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE



LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	1350	450	60	6000
50	1600	600	74	7400
50	2100	900	92	9200
50	2400	1000	110	11000
50	2800	1200	128	12800

*Lumens @ 4000K , CRI>80 , PC , Down lighting

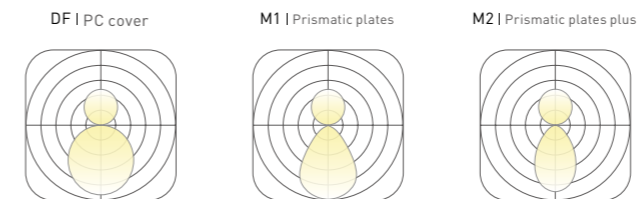

Lens | Hexagon

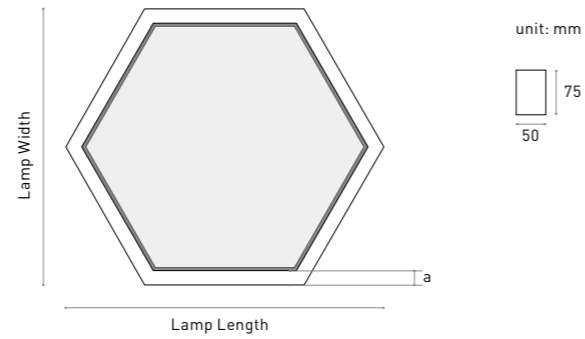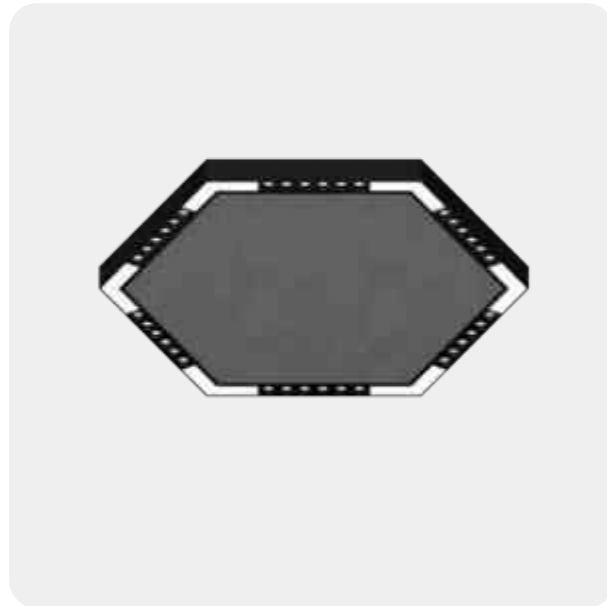

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE



LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	600	520	25	2500
50	900	779	30	3000
50	1200	1039	60	6000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

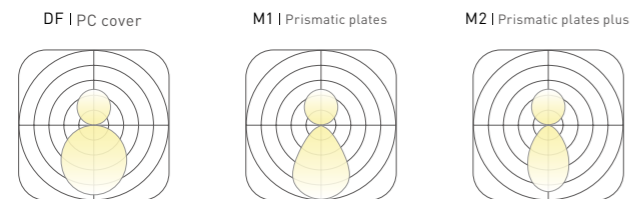

Lens | Rhombus

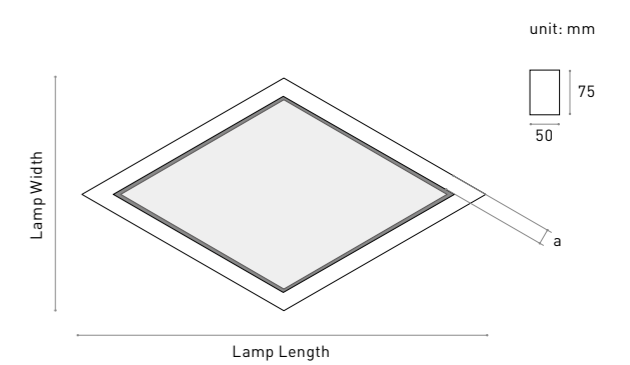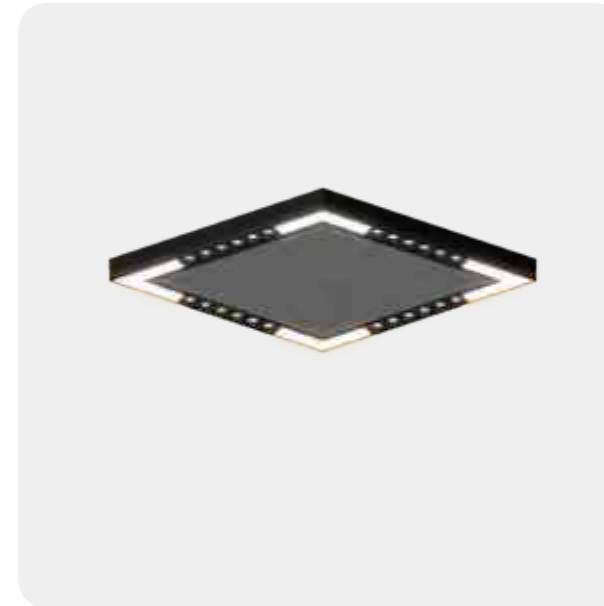

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	849	489	30	3000
50	1200	396	50	5000

*Lumens @ 4000K , CRI>80 , PC , Down lighting

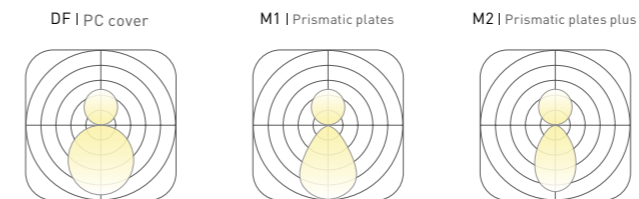

Lens | Oval

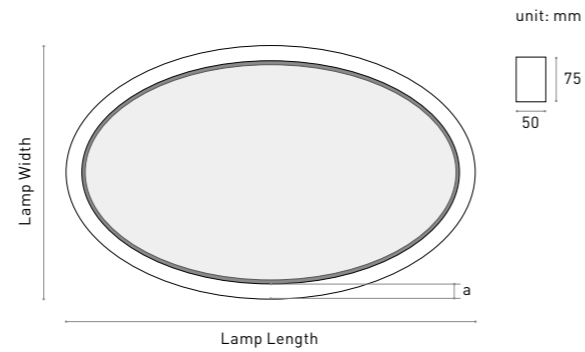

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	900	556	30	3000
50	1200	740	40	4000
50	1500	930	50	5000
50	1730	1070	70	7000
50	1940	1200	80	8000

*Lumens @ 4000K , CRI>80 , PC , Down Lighting

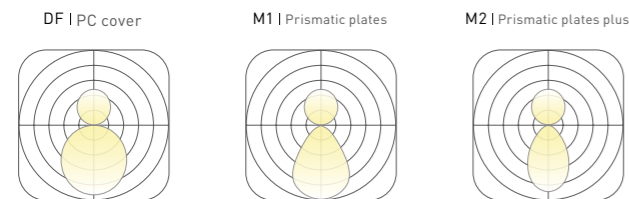

Lens | Eye

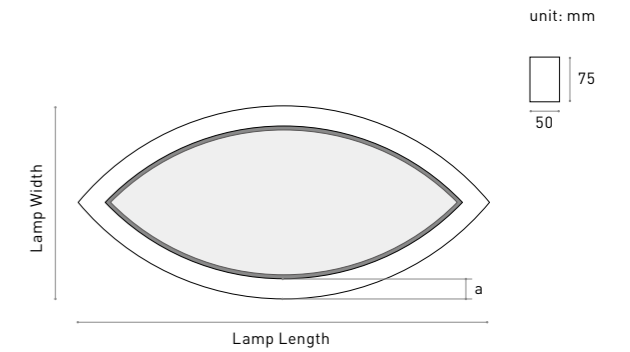

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Optic	DF , M1 , M2
CCT	2400~6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE A RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
50	600	229	20	2000
50	900	406	30	3000
50	1200	563	40	4000
50	1500	648	50	5000
50	1800	783	60	6000
50	2000	744	70	7000
50	2400	897	80	8000

*Lumens @ 4000K , CRI>80 , PC , Down Lighting

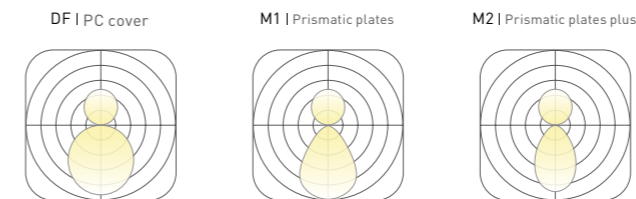

Linear louver

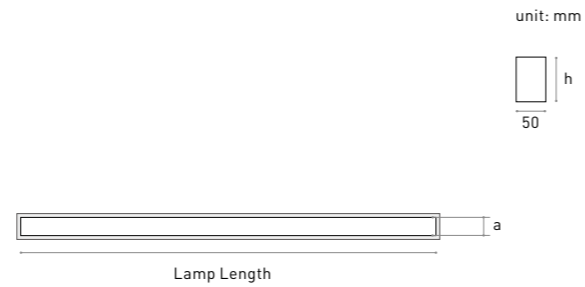

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	DF:40lm/W, M1:50lm/W
Lamp height	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE E RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	560	12	480
50	840	16	640
50	1120	22	880
50	1400	28	1120
50	1680	34	1360
50	1960	40	1600
50	2240	44	1760
50	2520	50	2000
50	2800	56	2240
50	3080	62	2480
50	3360	68	2720
50	3640	72	2880
50	3920	78	3120
50	4200	84	3360

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

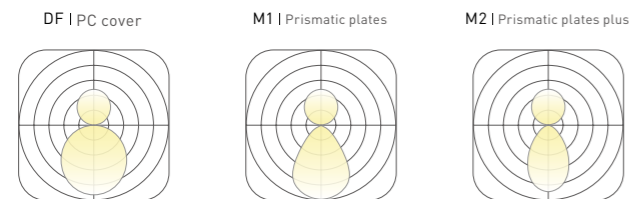

Linear louver

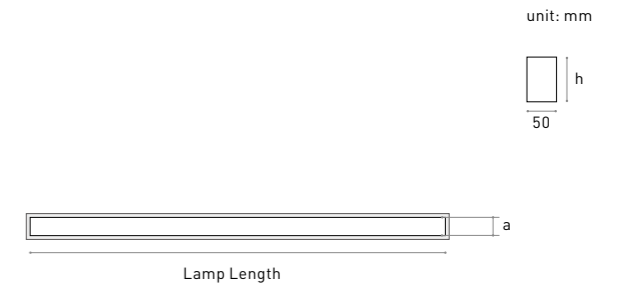

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	DF:65lm/W, M1:75lm/W
Lamp height	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE E RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	560	12	780
50	840	16	1040
50	1120	22	1430
50	1400	28	1820
50	1680	34	2210
50	1960	40	2600
50	2240	44	2860
50	2520	50	3250
50	2800	56	3640
50	3080	62	4030
50	3360	68	4420
50	3640	72	4680
50	3920	78	5070
50	4200	84	5460

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

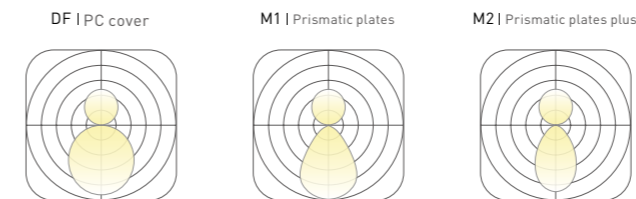

Honeycomb louver

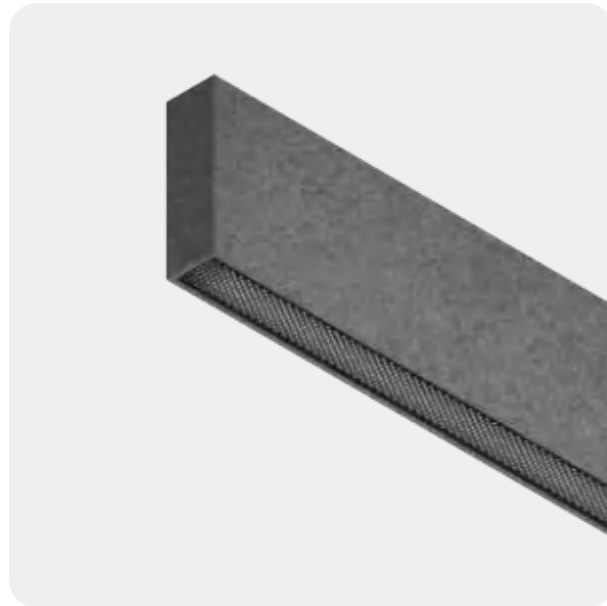

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	DF:25lm/W, M1:35lm/W
Lamp height	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE E RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	560	12	400
50	840	16	400
50	1120	22	500
50	1400	28	600
50	1680	34	700
50	1960	40	850
50	2240	44	1000
50	2520	50	1100
50	2800	56	1400
50	3080	62	1550
50	3360	68	1700
50	3640	72	1800
50	3920	78	1950
50	4200	84	2100

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

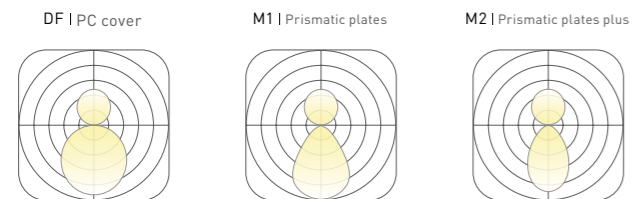

Honeycomb louver

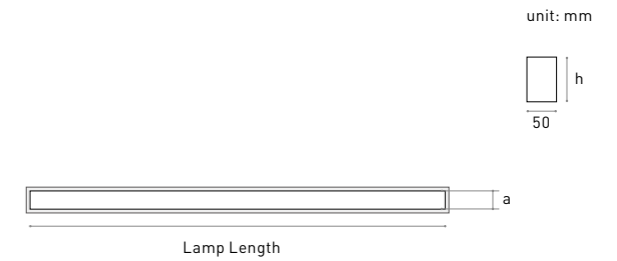

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	UP&Down , Down
Installation	Pendant , Ceiling , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	DF:50lm/W, M2:60lm/W
Lamp height	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE E RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	Length(mm)	Power (w)	Luminous (lm)
50	560	12	600
50	840	16	800
50	1120	22	1100
50	1400	28	1400
50	1680	34	1700
50	1960	40	2000
50	2240	44	2200
50	2520	50	2500
50	2800	56	2800
50	3080	62	3100
50	3360	68	3400
50	3640	72	3600
50	3920	78	3900
50	4200	84	4200

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC , Down lighting

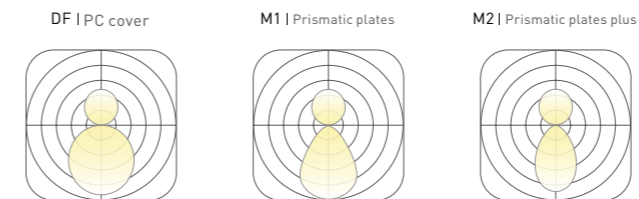

Decoration | Belief

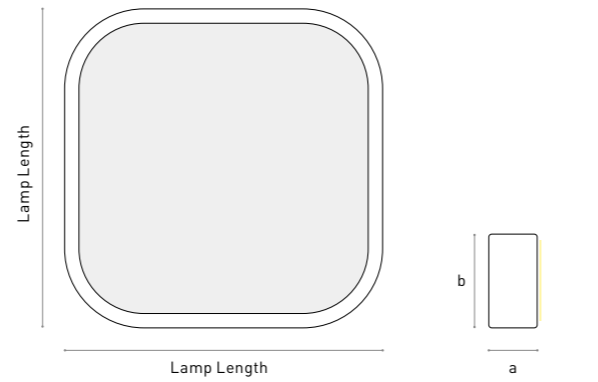

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant, Ceiling, Recessed, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	40-80lm/W
Lamp height	40/50/55/60/100mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Power (w)	Luminous (lm)
25	40	911	30	1200
25	40	1200	40	1600
25	55	911	30	1200
25	55	1200	40	1600
31	50	911	45	1800
31	50	1200	60	2400
37	60	911	60	2400
37	60	1200	80	3200

*Lumens @ 4000K, CRI>80, PC

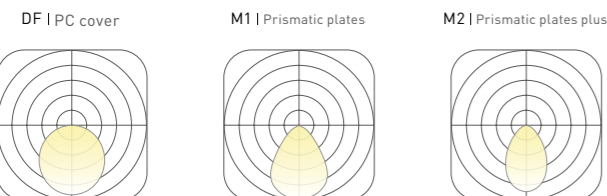

Decoration | Circle

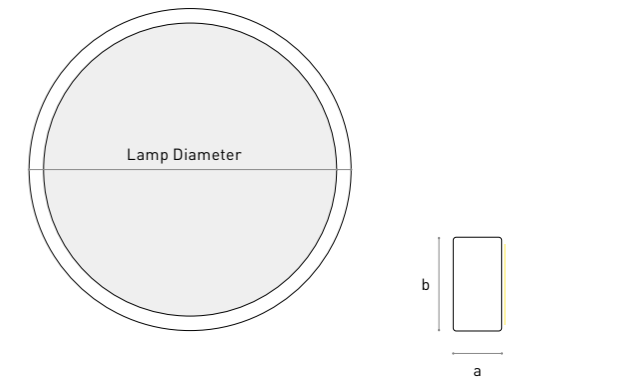

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant, Ceiling, Recessed, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	40-80lm/W
Lamp height	40/50/55/60/100mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Diameter(mm)	Power (w)	Luminous (lm)
25	40	480	15	600
25	40	640	20	800
25	40	800	40	1600
25	40	960	30	1200
25	40	1120	35	1400
25	55	480	15	600
25	55	640	20	800
25	55	800	40	1600
25	55	960	30	1200
25	55	1120	35	1400
31	50	480	22	880
31	50	640	30	1200
31	50	800	60	2400
31	50	960	45	1800
31	50	1120	52	2080
37	60	480	30	1200
37	60	640	40	1600
37	60	800	80	3200
37	60	960	60	2400
37	60	1120	70	2800

*Lumens @ 4000K, CRI>80, PC

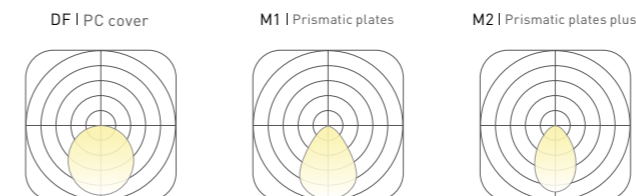

Decoration | Eye

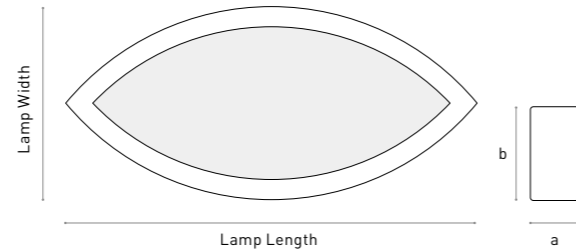

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant, Ceiling, Recessed, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	40-80lm/W
Lamp height	40/50/55/60/100mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	600	229	14	560
25	40	892	398	20	800
25	40	1192	553	28	1120
25	55	600	229	14	560
25	55	892	398	20	800
25	55	1192	553	28	1200
31	50	600	229	21	840
31	50	892	398	30	1200
31	50	1192	553	42	1680
37	60	600	229	28	1120
37	60	892	398	40	1600
37	60	1192	553	56	2240

*Lumens @ 4000K, CRI>80, PC

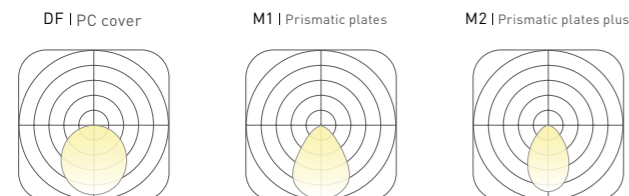

Decoration | Galaxy

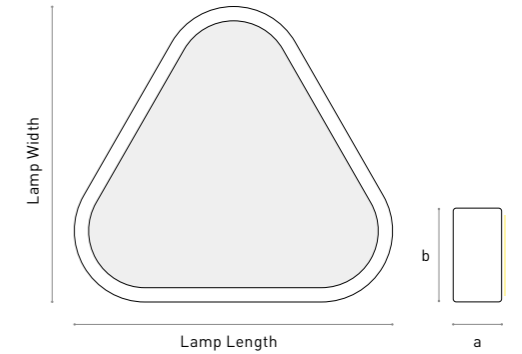

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant, Ceiling, Recessed, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	40-80lm/W
Lamp height	40/50/55/60/100mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	913	858	30	1200
25	40	1213	913	36	1440
25	55	913	858	30	1200
25	55	1213	913	36	1440
31	50	913	858	45	1800
31	50	1213	913	54	2160
37	60	913	858	60	2400
37	60	1213	913	72	2880

*Lumens @ 4000K, CRI>80, PC

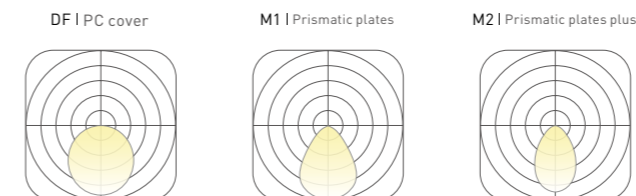

Decoration | Galaxy V2.0

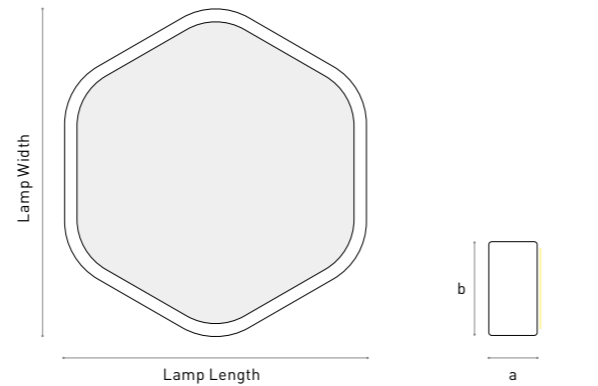

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant, Ceiling, Recessed, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	40-80lm/W
Lamp height	40/50/55/60/100mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	772	814	24	960
25	40	1118	1214	40	1600
25	55	772	814	24	960
25	55	1118	1214	40	1600
31	50	772	814	36	1440
31	50	1118	1214	60	2400
37	60	772	814	48	1920
37	60	1118	1214	80	3200

*Lumens @ 4000K, CRI>80, PC

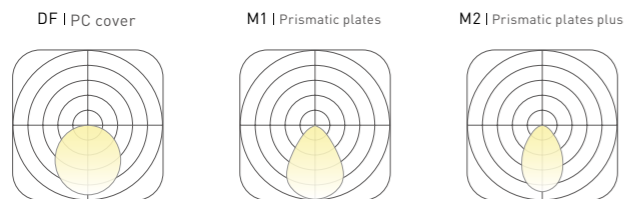

Decoration | Galaxy V3.0

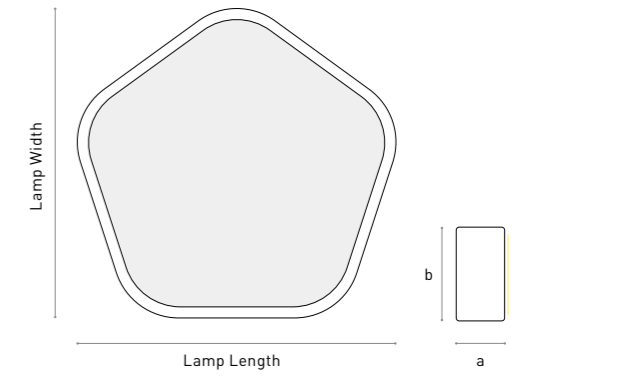

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant, Ceiling, Recessed, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	40-80lm/W
Lamp height	40/50/55/60/100mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	934	913	30	1200
25	40	1225	1190	38	1520
25	55	934	913	30	1200
25	55	1225	1190	38	1520
31	50	934	913	44	1760
31	50	1225	1190	58	2320
37	60	934	913	60	2400
37	60	1225	1190	76	3040

*Lumens @ 4000K, CRI>80, PC

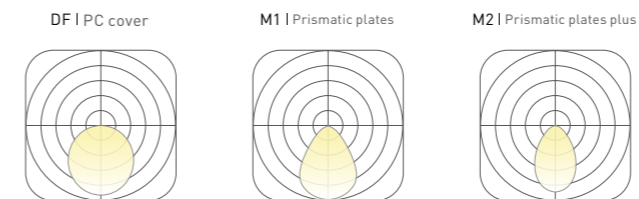

Decoration | Hexagon

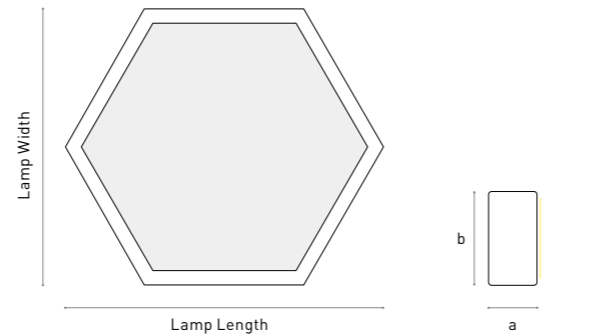

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Lamp hight	40/50/55/60/100mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	604	523	18	720
25	40	904	779	28	1120
25	40	1204	1043	36	1440
25	55	604	523	14	560
25	55	904	779	20	800
25	55	1204	1043	28	1120
31	50	604	523	22	880
31	50	904	779	30	1200
31	50	1204	1043	42	1680
37	60	604	523	28	1120
37	60	904	779	40	1600
37	60	1204	1043	56	2240

*Lumens @ 4000K , CRI>80 , PC

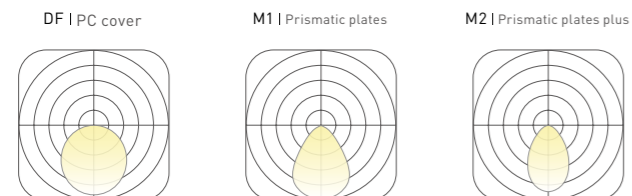

Decoration | Oval

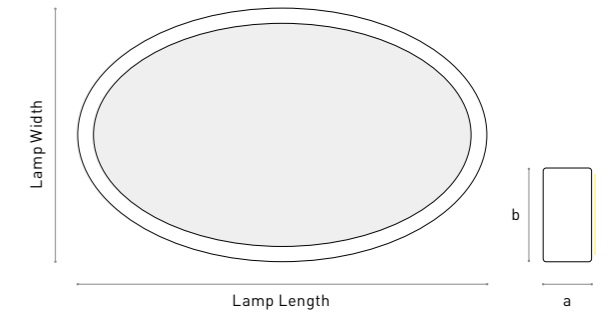

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Lamp hight	40/50/55/60/100mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	900	556	24	960
25	40	1050	650	28	1120
25	40	1200	748	30	1200
25	55	900	556	24	960
25	55	1050	650	28	1120
25	55	1200	748	30	1200
31	50	900	556	36	1440
31	50	1050	650	42	1680
31	50	1200	748	44	1760
37	60	900	556	48	1920
37	60	1050	650	56	2240
37	60	1200	748	60	2400

*Lumens @ 4000K , CRI>80 , PC

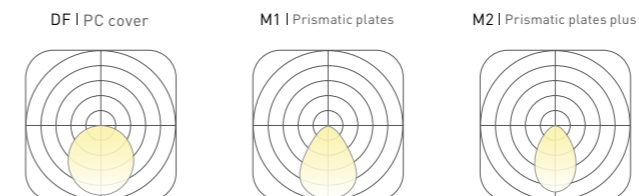

Decoration | Quadrate

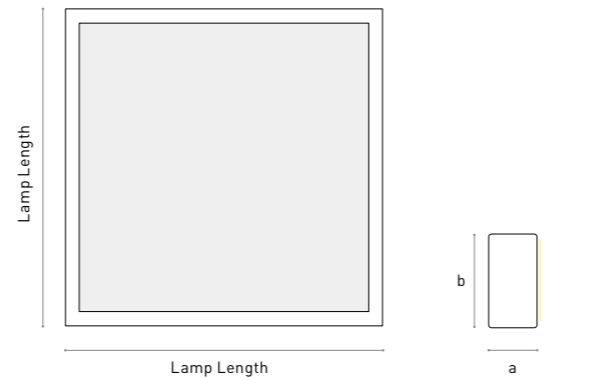

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Lamp hight	40/50/55/60/100mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE



LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Power (w)	Luminous (lm)
25	40	604	24	960
25	40	904	36	1440
25	40	1204	48	1920
25	55	604	24	960
25	55	904	36	1440
25	55	1204	48	1920
31	50	604	36	1440
31	50	904	54	2160
31	50	1204	72	2880
37	60	604	48	1920
37	60	904	72	2880
37	60	1204	96	3840

*Lumens @ 4000K , CRI>80 , PC

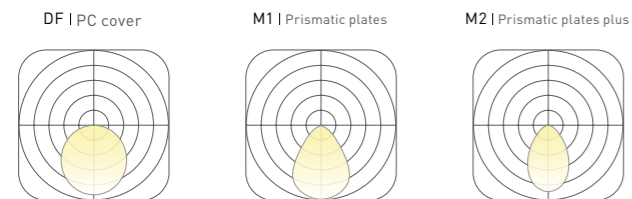

Decoration | Rhombus

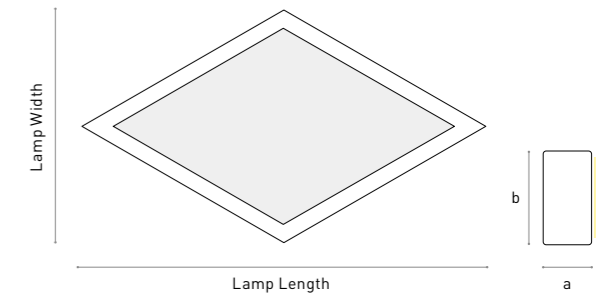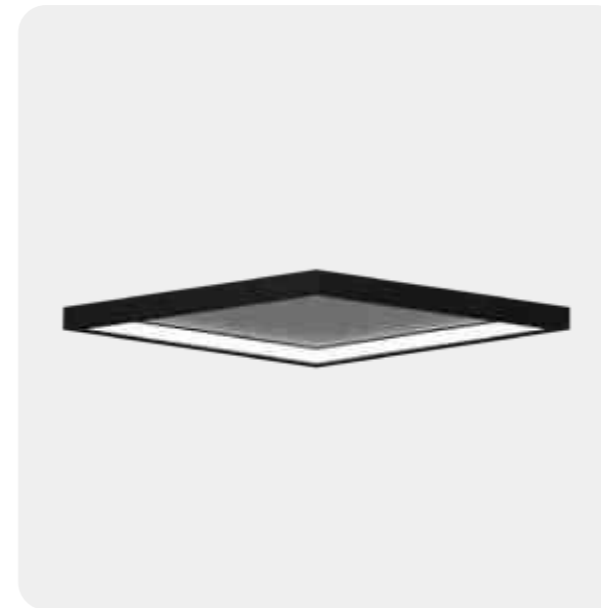

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Lamp hight	40/50/55/60/100mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	830	479	24	960
25	40	1003	579	28	1120
25	40	1220	704	30	1200
25	55	830	479	24	960
25	55	1003	579	28	1120
25	55	1220	704	30	1200
31	50	830	479	36	1400
31	50	1003	579	42	1680
31	50	1220	704	45	1800
37	60	830	479	38	1520
37	60	1003	579	56	2240
37	60	1220	704	60	2400

*Lumens @ 4000K , CRI>80 , PC

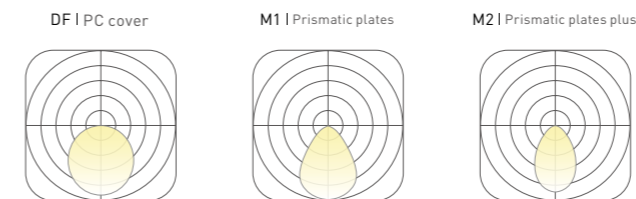

Decoration | Triangle

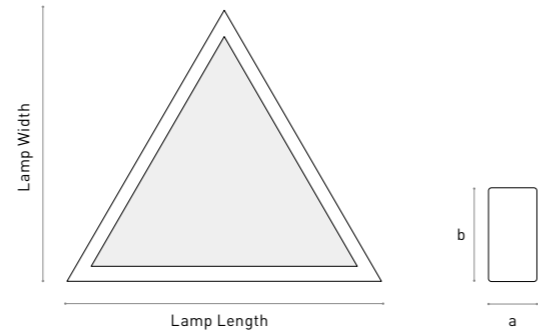

COLOURS Choose from three color libraries

Acoustic Click to library HL-04 HL-05 HL-06

Texture Click to library TE-03 TE-04 TE-05

Profile Click to library Silver Black White


BASIC PARAMETER

Lighting direction	Inner
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	40-80lm/W
Lamp hight	40/50/55/60/100mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	

LAMPS PARAMETER


a(mm)	b(mm)	Length(mm)	Width(mm)	Power (w)	Luminous (lm)
25	40	606	525	18	720
25	40	906	785	28	1120
25	40	1206	1045	36	1440
25	55	606	525	18	720
25	55	906	785	28	1120
25	55	1206	1045	36	1440
31	50	606	525	28	1120
31	50	906	785	42	1680
31	50	1206	1045	54	2160
37	60	606	525	36	1440
37	60	906	785	56	2240
37	60	1206	1045	72	2880

*Lumens @ 4000K , CRI>80 , PC

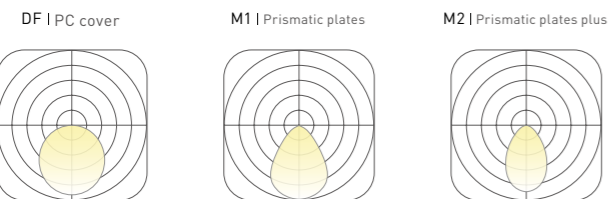



Taurus | Wrapped



COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Diameter(mm)	Power (w)	Luminous (lm)
330	15	1500
370	20	2000
520	35	3500
540	40	4000
660	60	6000
780	80	8000
820	90	9000
940	120	12000
1200	200	20000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

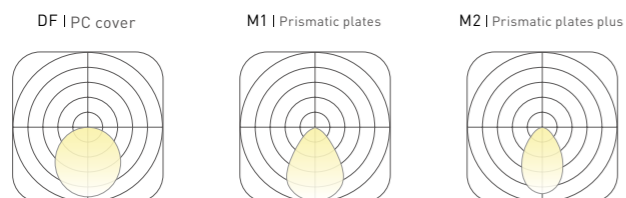

Aries | Wrapped

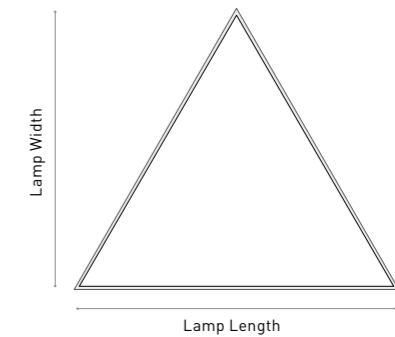

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
399	346	12	1200
468	406	16	1600
600	520	30	3000
699	605	40	4000
755	653	45	4500
900	779	60	6000
999	865	70	7000
1055	913	80	8000
1200	1039	100	10000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

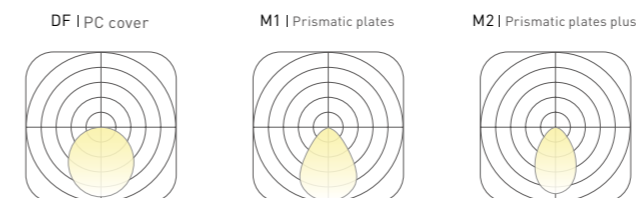

Gemini | Wrapped

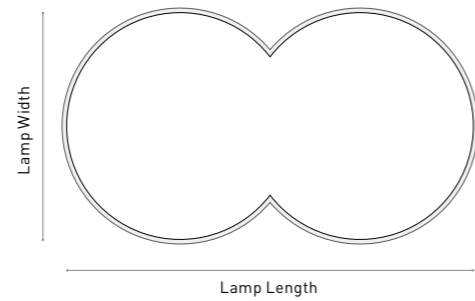

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
800	450	50	5000
1200	700	120	12000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

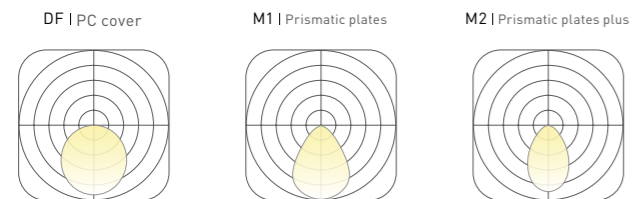

Cancer | Wrapped

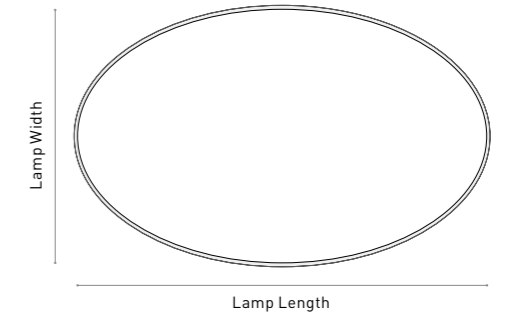

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
784	440	45	4500
824	480	55	5500
974	574	75	7500
1084	624	90	9000
1124	664	100	10000
1200	740	120	12000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

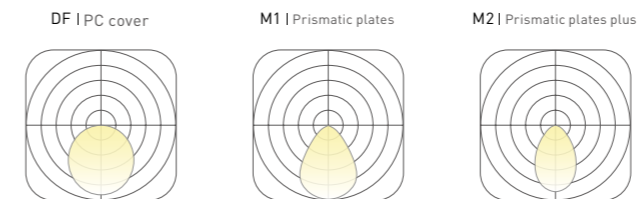

Leo | Wrapped

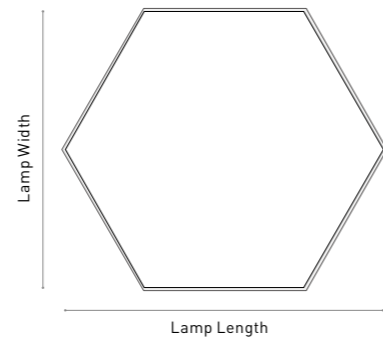

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
466	404	25	2500
616	534	40	4000
812	703	75	7500
916	793	90	9000
1066	923	120	12000
1200	1039	160	16000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

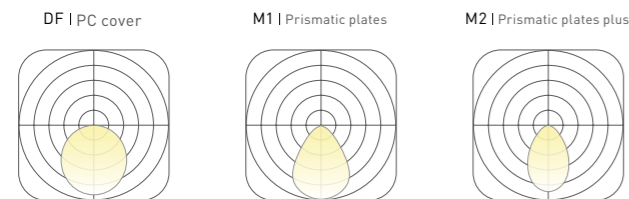

Vrigo | Wrapped

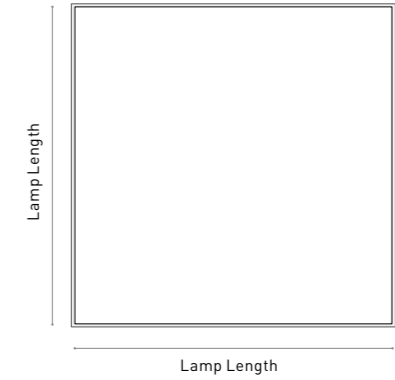

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Power (w)	Luminous (lm)
480	40	4000
520	50	5000
600	60	6000
900	140	14000
1200	250	25000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

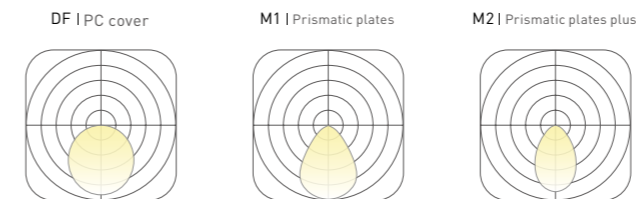

Scorpio | Wrapped

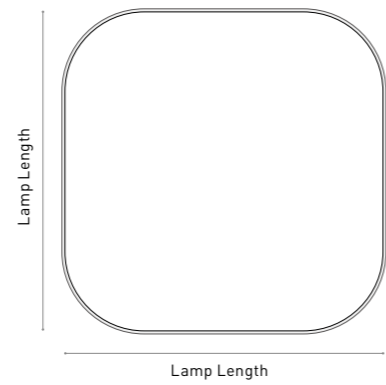

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Power (w)	Luminous (lm)
600	60	6000
780	100	10000
820	110	11000
900	130	13000
952	150	15000
1036	180	18000
1080	190	19000
1120	210	21000
1200	240	24000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

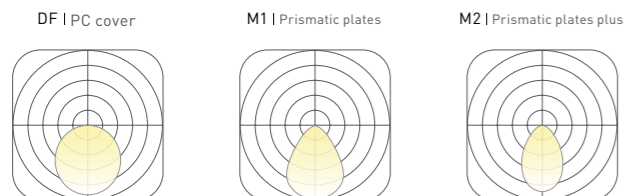

Sagittarius | Wrapped

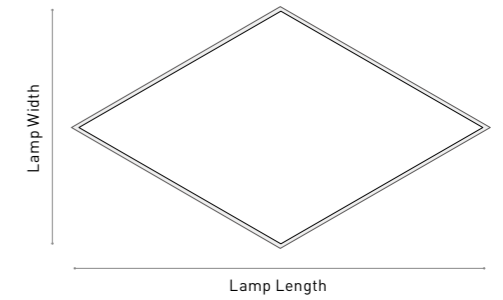

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
617	356	20	2000
697	402	25	2500
849	490	35	3500
1024	591	50	5000
1200	693	70	70000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

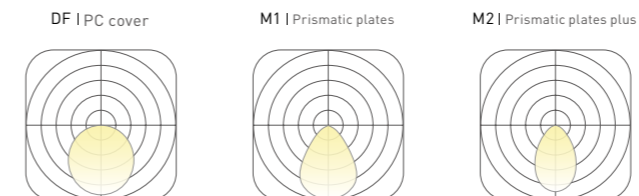

Capricon | Wrapped

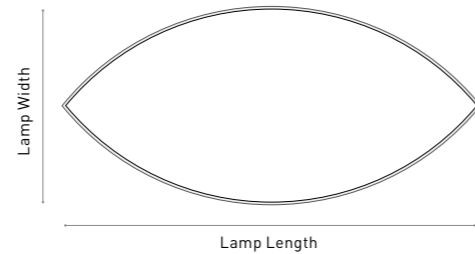

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
600	229	16	1600
737	290	25	2500
900	406	45	4500
1044	447	55	5500
1200	563	80	8000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

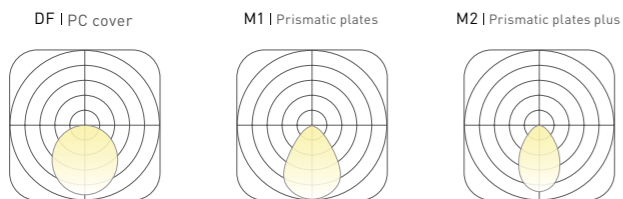

Pisces | Wrapped

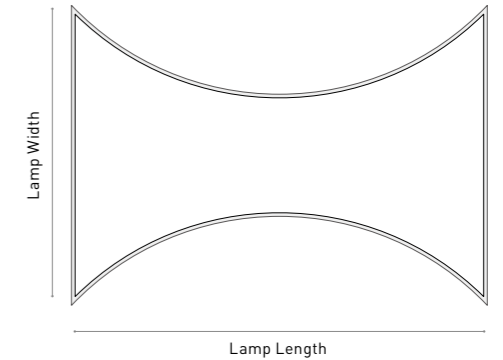

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
600	333	18	1800
737	455	30	3000
900	794	80	8000
1044	753	80	8000
1196	640	50	5000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

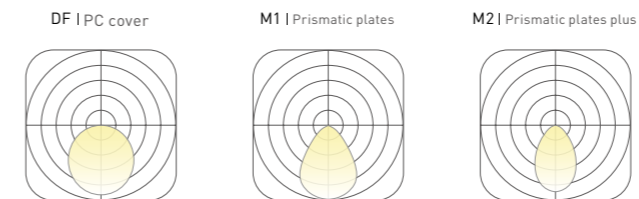

Galaxy | Wrapped

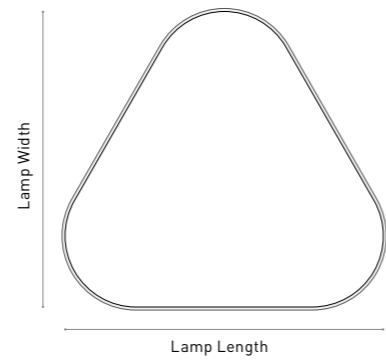

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
600	559	30	3000
900	833	60	6000
1200	1099	100	10000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

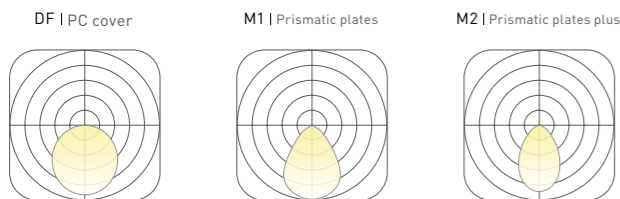

Libra | Wrapped

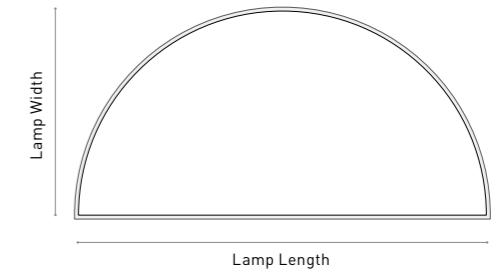

COLOURS Choose from three color libraries

Acoustic Click to library: HL-04, HL-05, HL-06

Texture Click to library: TE-03, TE-04, TE-05

Profile Click to library: Silver, Black, White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant, Ceiling, Wall mounted
Beam angle	PC:105°, M1:72°, M2:70°
Light efficiency	100lm/W
Lamp height	60-200mm
Optic	DF, M1, M2
CCT	2400-6500K, RGB, RGBW
DIMMING	Non, Dali, Push, Triac, 0-10V, Remote, Tunable
Input voltage	200-240V, 100-277V
CRI	>80, >90, >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
330	165	8	800
370	185	10	1000
520	260	18	1800
540	270	20	2000
660	330	30	3000
780	390	40	4000
820	410	45	4500
940	470	60	6000
1200	600	100	10000

*Not included texture shell size, Lumens @ 4000K, CRI>80, PC

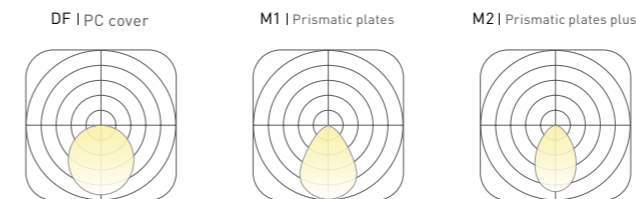

Taurus | Hat



COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

Diameter(mm)	Power (w)	Luminous (lm)
330	15	1500
370	20	2000
520	35	3500
540	40	4000
660	60	6000
780	80	8000
820	90	9000
940	120	12000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

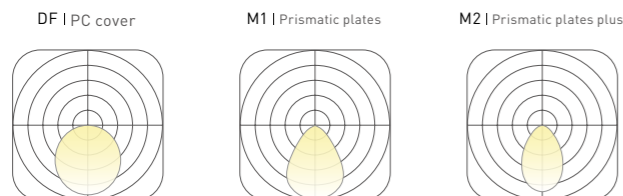

Aries | Hat

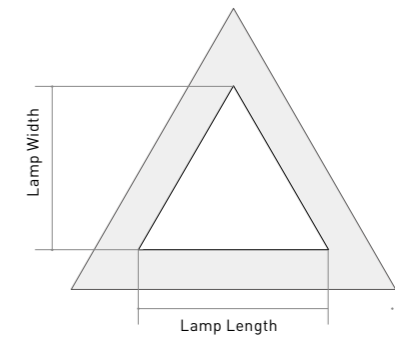

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
399	346	12	1200
468	406	16	1600
600	520	30	3000
699	605	40	4000
755	653	45	4500
900	779	60	6000
999	865	70	7000
1055	913	80	8000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

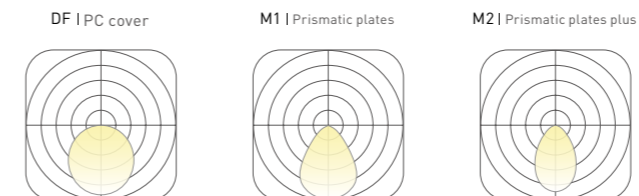

Gemini | Hat

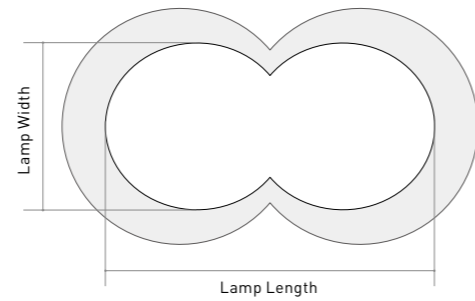

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
800	450	50	5000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

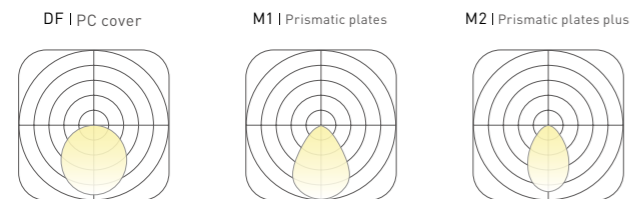

Cancer | Hat

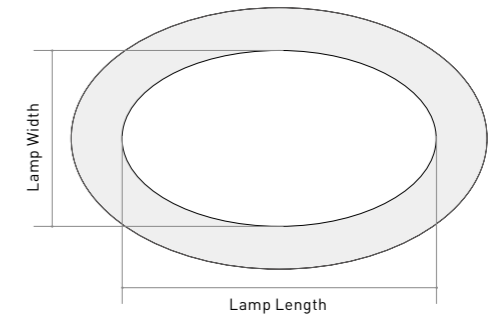

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
784	440	45	4500
824	480	55	5500
974	574	75	7500
1084	624	90	9000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

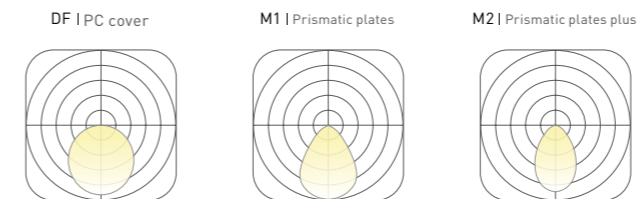

Leo | Hat

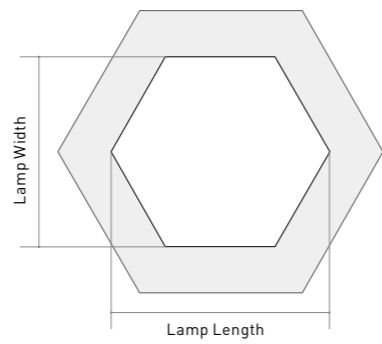

COLOURS Choose from three color libraries

Acoustic Click to library **Profile** Click to library

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
466	404	25	2500
616	534	40	4000
812	703	75	7500
916	793	90	9000
1066	923	120	12000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

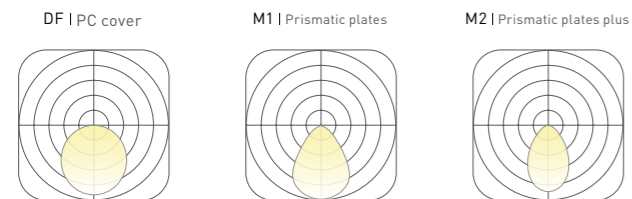

Vrigo | Hat

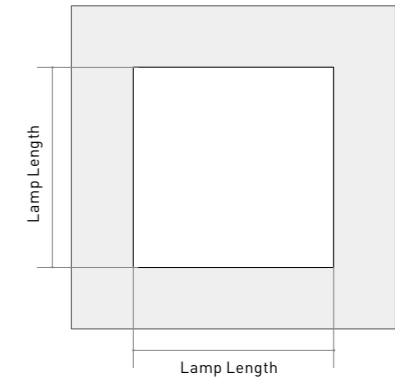

COLOURS Choose from three color libraries

Acoustic Click to library **Profile** Click to library

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Power (w)	Luminous (lm)
480	40	4000
520	50	5000
600	60	6000
900	140	14000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

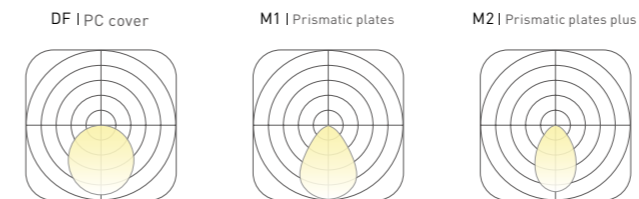

Scorpio | Hat

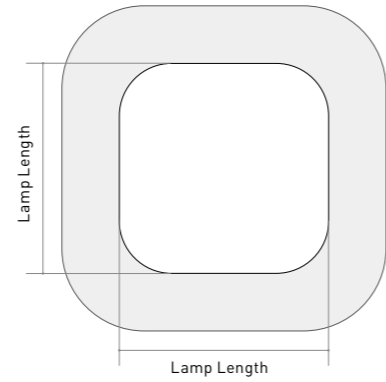

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

Length(mm)	Power (w)	Luminous (lm)
600	60	6000
780	100	10000
820	110	11000
900	130	13000
952	150	15000
1036	180	18000
1080	190	19000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

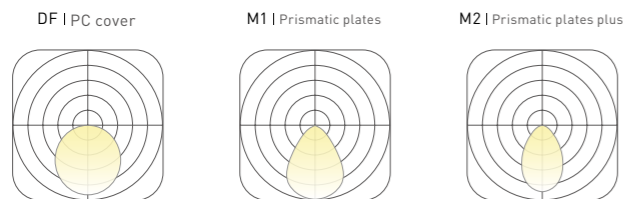

Sagittarius | Hat

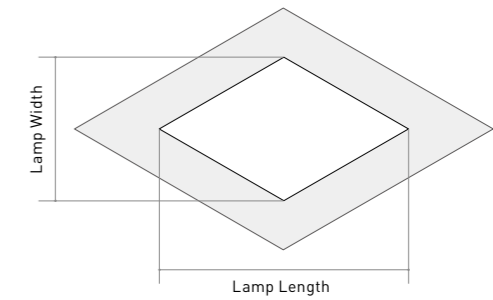

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
617	356	20	2000
697	402	25	2500
849	490	35	3500
1024	591	50	5000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

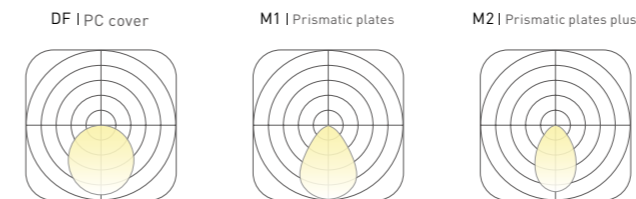

Capricon | Hat

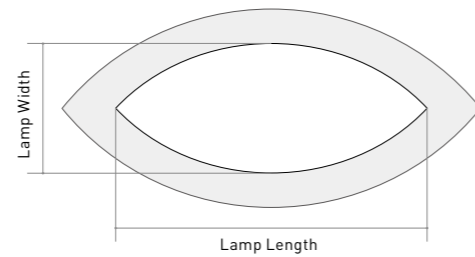

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
600	229	16	1600
737	290	25	2500
900	406	45	4500
1044	447	55	5500

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

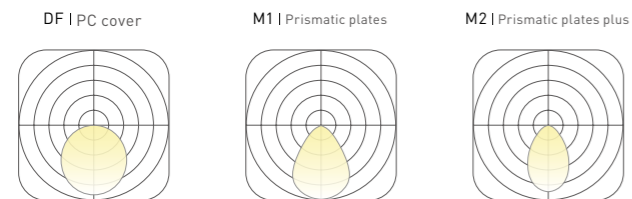

Pisces | Hat

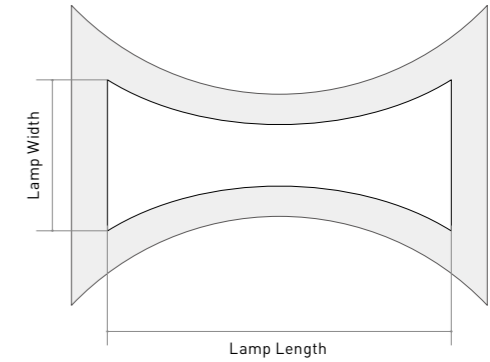

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE


LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
600	333	18	1800
737	455	30	3000
900	794	80	8000
1044	753	80	8000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

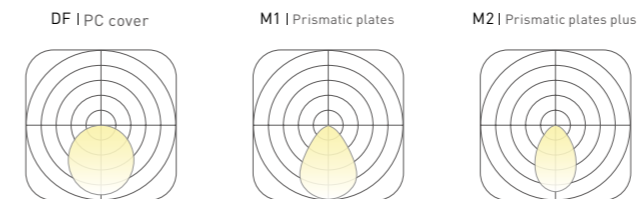

Galaxy | Hat

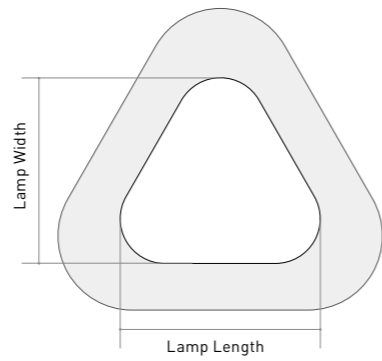

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE



LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
600	559	30	3000
900	833	60	6000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

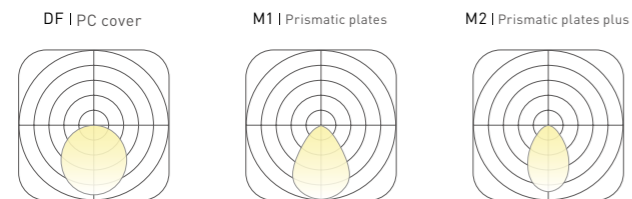

Libra | Hat

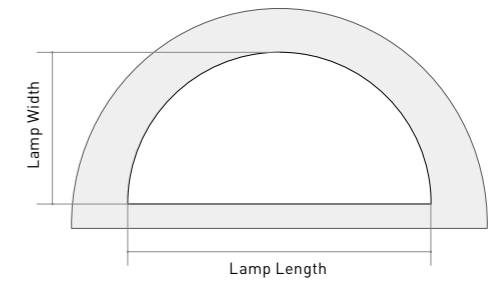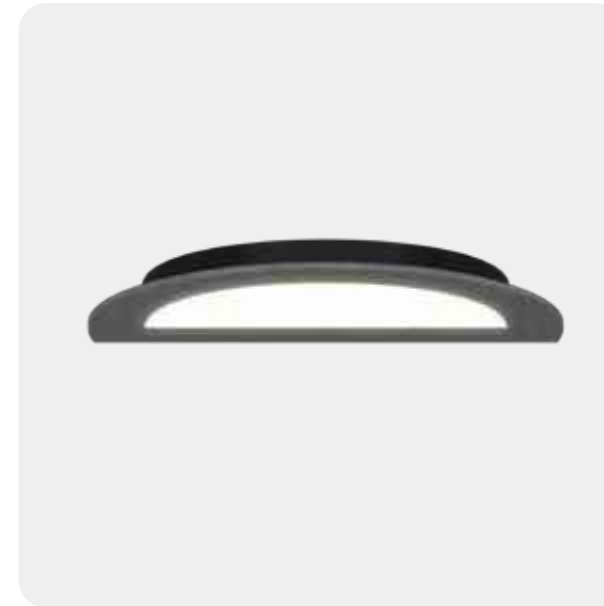

COLOURS Choose from three color libraries

Acoustic [Click to library](#) **Profile** [Click to library](#)

HL-04 HL-05 HL-06 Silver Black White


BASIC PARAMETER

Lighting direction	Down
Installation	Pendant , Ceiling , Recessed , Wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Lamp hight	60-200mm
Optic	DF , M1 , M2
CCT	2400-6500K , RGB , RGBW
DIMMING	Non , Dali , Push , Triac , 0-10V , Remote , Tunable
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years
Certification	CB CE ENEC RoHS DALI DIMMER FREE

LAMPS PARAMETER

Length(mm)	Width(mm)	Power (w)	Luminous (lm)
330	165	8	800
370	185	10	1000
520	260	18	1800
540	270	20	2000
660	330	30	3000
780	390	40	4000
820	410	45	4500
940	470	60	6000

*Not included texture shell size , Lumens @ 4000K , CRI>80 , PC

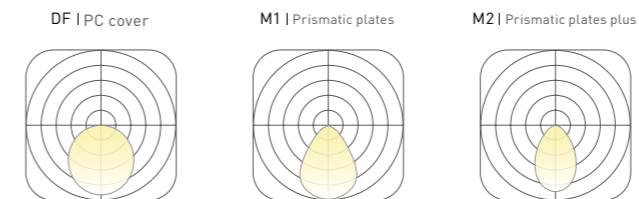



TAKE NOTES FOR YOUR FAVORITE









CCT:

Dim:

Size:

Color:


Power:




HLINEAR


HLINEAR LIGHTING CO.,LTD.



 Tel: +0757-85574750

 E-mail: sales@hlinear.com

 Web: www.hlinear.com

 Add: 3-6th Floor,Building 40#,Chuangke Road No.13,
Xiqiao,Nanhai,Foshan,Guangdong,528211,China.