

Recessed Downlights



LED Downlight Round / Square

Wattage Lumens 900lm, 1500lm Color Temperature 27K, 30K, 40K, 50K





700lm, 900lm Color Temperature 27K, 30K, 40K, 50K

Ultra-thin Downlight



Wattage 15W Lumens

Color Temperature 27K, 30K, 40K, 50K



Wattage

Lumens Color Temperature 27K, 30K, 40K, 50K

Architectural Downlights



Vtrim family Round / Square

Wattage 13W, 15W, 20W Beam Angle 15° 18° 24° 35° 50° 60° Color Temperature Reflector Finish Semi Specular, Gold, Chrome Black, Matte Black



Wattage 13W, 15W, 20W Beam Angle 15° 18° 24° 35° 50° 60° Color Temperature Reflector Finish Semi Specular, Gold, Chrome Black, Matte Black



ART Series Round / Square Wet location

Wattage 13W, 15W, 20W Beam Angle 24° 35° 45° 50° Wall wash Color Temperature 27K, 30K, 35K, 40K Reflector Finish Semi Specular, Gold, Chrome Black, Matte Black



Wattage 13W, 15W, 20W Beam Angle 24° 35° 45° 50° Wall wash Color Temperature 27K, 30K, 35K, 40K Reflector Finish Semi Specular, Gold, Chrome Black, Matte Black

- Visit our website for more information





Cylinder Lighting



- Available with various beam angle and three different light distribution option.
- •Available in 4 finishes crafted to complement existing downlight and architectural product lines.

Cove Lighting



- Operates at 120V AC
- Architectural-grade light quality
- Offered in lengths from 4" to 140' and designed to follow straight lines or curve
- Suitable for both indoor and outdoor use, with IP65 rating

4" LED Downlight Retrofit Kit

A sleek, low-profile design with smooth dimming (100%-10%) and a 110° beam angle for even lighting. Features CRI90+ for vibrant colors and adjustable color temperature (2700K-5000K) to set the perfect mood. Energy-efficient, easy to install, and ideal for any space.




Undercabinet




- ·Field-adjustable light output & color temperature
- Designed to provide soft, uniform lighting on work surfaces
- Simple to connect multiple fixtures
- •Occupancy sersor accessory controls on/off, and includes a switch to manually turn off fixtures
- ·Compatible with common ELV & TRIAC dimmers


In-Wall Smart Switch




- Easily control from your smartphone or other HALO Home Controllers
- · Add to Groups or setup Schedules
- ·Max Loads: 720W Incandescent, 600W CFL/FL/LED/ELV, 1/2 HP motor
- Fits standard wall plates (not included)
- · Has air gap switch to temporarily disconnect power
- · Neutral wire required, indoor use only
- 120V / AC 60Hz standard house wiring
- · Add wireless multi-way control by installing with Accessory Switches

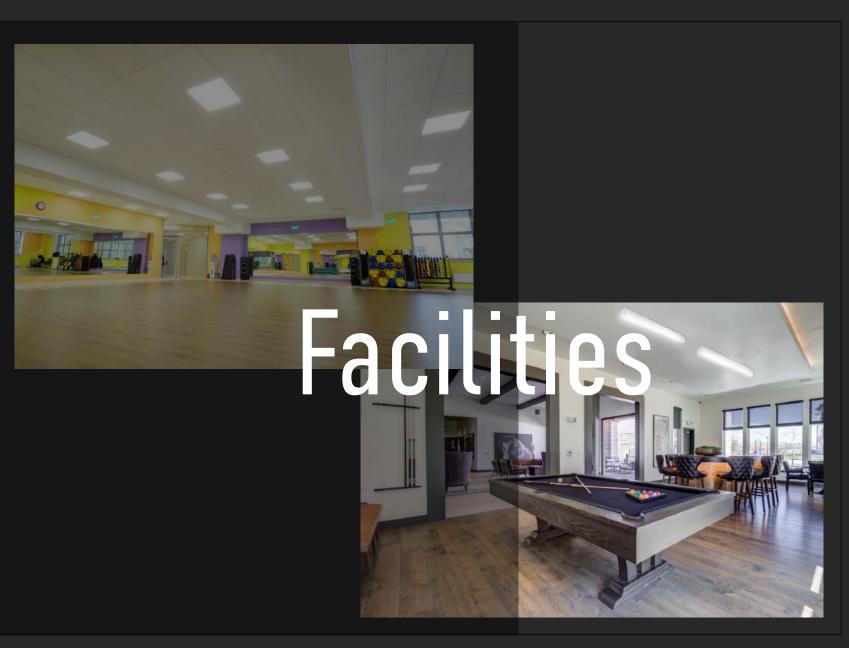





Occupancy Sensor



- Occupancy and vacancy sensing
- · Switching for fixture or entire zone
- Supports 0-10V dimming

Available in 2' (20W) and 4' (27W and 40W) models


• Surface or chain mounting options

Linear Wrap

- Through Wiring Kit allows for row
- Prismatic lens provides smooth light distribution
- 0-10V dimming, standard

mounting or daisy chaining

Edge-Lit Panels



- Perfect for shallow plenums
- · Battery backup option available
- Even and diffuse illumination, ideal for spaces requiring glare-free lighting
- · Surface and recessed mounting kits available
- Available with Lightcloud Controller
- Field-adjustable lumen output and color temperature on FA models
- HE models are ultra efficient, with up to 140 lm/W



Linear Lighting

- Available in 2' (20W),4' (35W), and 8' (65W)
- · cULus approved for damp locations
- Versatile mounting options: chain, junction box, angled surface mount, ceiling mount or vandalresistant surface mount