


All Wheels Recover Energy Some Do it Better...



DRI[®] ECO FRESH[™]
Energy Recovery Wheels

MS 200 SERIES

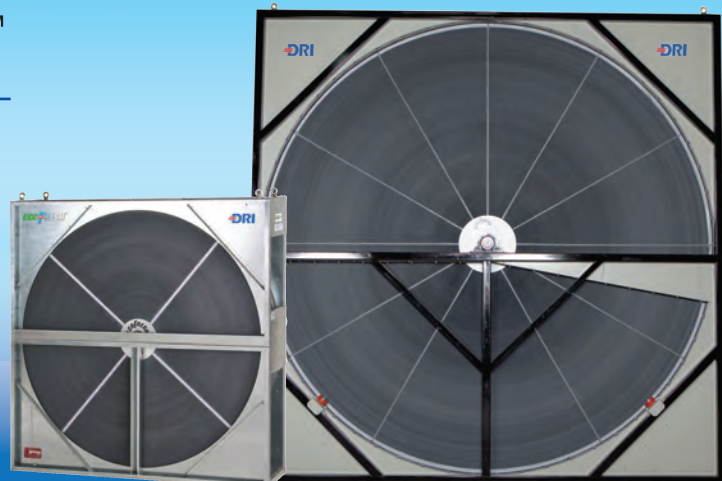

DRI[®]

Innovative Air Solutions

Certifications



State-of-the-art Facilities



Fully integrated manufacturing facility for :

- Synthesizing / coating.
- Winding.
- Inhouse Metal work.
- Quick response, fast delivery.
- Substantial capacity to meet large orders.
- Experience with strong OEM customer base worldwide.
- Surface finishing including CNC fabrication & powder coating.


World-Class Manufacturing & Test Facilities



DRI has set up a World-class Test Facility for performance evaluation of Enthalpy Wheels.



Selection Software Available

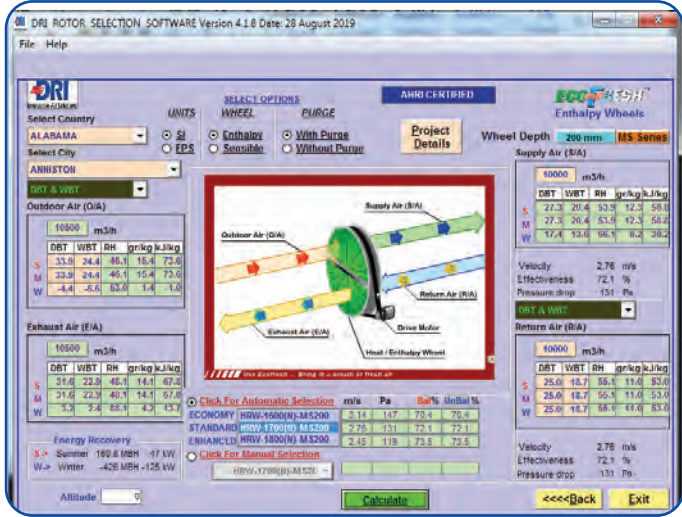

...Beyond Payback

Better ★ Humidity Control ★ Energy Recovery

Thus, better and enhanced IAQ at lower Energy costs

- Pre-conditions incoming fresh air.
- Easily integrated/retrofitted into new/existing ventilation systems.
- Delivers fresh air throughout the year at conditions very near inside conditions.
- Helps to meet ventilation standard without raising energy cost.
- Maintains humidity conditions at no additional cost.
- Allows reduction in system capacity by 30% to 65%.

EcoFresh Wheels have played a major role in many projects for achieving sustainable Green Building status with LEED and other energy certifications.

GBC Memberships



Think Afresh . . .with MS 200 series !!



High Selectivity :

EcoFresh Energy Wheels MS 200 series use Molecular Sieve 3Å (EcoSorb 300) desiccant coated on aluminum substrate and this results in high latent recovery and control on cross contamination

Aluminium Substrate :

The aluminium substrate eliminates any fire risks and results in high sensible recovery and high structural strength

In-built Purge Sector Eliminates Cross Contamination :

Purge section provides strict separation of air flows, preventing carryover of bacteria, dust and pollutants from exhaust air to supply air. Purge section and sealing system limit cross contamination to 0.04% of the exhaust air concentration by volume

Non Contact Labyrinth Seal :

- No wear and tear
- Long life
- Effective sealing
- Brush seal for wheels upto 2200 mm

Structural Rigidity, Hardened Edges & Innovative Manufacturing Design :

- State-of-the-art winding technology and adhesives give EcoFresh rotors high structural strength
- Wheel Edges hardened as standard to suit marine coastal application needs

Highly Polished Surface :

Vertical run out less than 1 mm per 1000 mm resulting in extremely low leakage across the central divider seals

Robust Spoke Structure

Highest Recovery Efficiency Ratio (RER) In The Industry

Industry's Highest Recovery/ Performance :

- High Desiccant loading / coating
- Nearly equal sensible and latent recovery, thus comparatively higher total enthalpy recovery
- Higher performance, low pressure drops
- Laminar airflow due to thin aluminium substrate & uniform desiccant coating
- Superior airflow characteristics

Wide Range & Additional Options :

- Total energy recovery (Enthalpy) & AHRI Certified sensible wheels
- Customized Flute height and Rotors depth-options
- Cassette as well as Rotor options
- Standard and Customized options
- 500 mm to 5000 mm (dia)
- Easy retrofit options


Segmented and Non Segmented Options

Controls Package Available

DRI has its Airineers spread out world over

- | | | | | | |
|---------------|------------|-------------|----------------|---------------|----------|
| • India | • Malaysia | • Indonesia | • Vietnam | • Philippines | • Korea |
| • China | • Japan | • USA | • Canada | • Bangladesh | • Brazil |
| • Switzerland | • Nigeria | • UAE | • Saudi Arabia | | |

Worldwide Presence

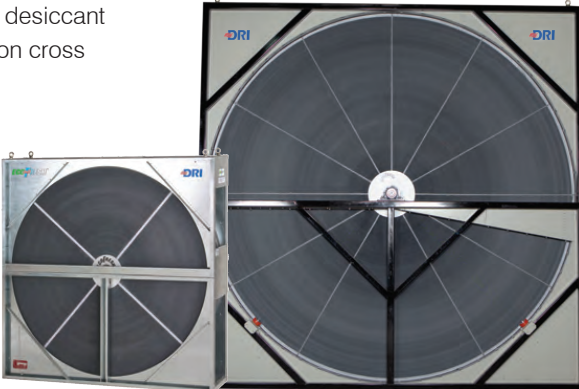

Heat Recovery Wheel - Performance Data

HRW Series (MS-200-1.9MM)



Velocity	M/S	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	Height and Depth Width in Flow Direction "A" "B" mm mm Inches Inches		
Sensible	FPM	200	300	400	500	600	700	800	900	1000	Net Weight Kg. Pounds		
Latent (Winter Heating)	Effectiveness (Balance) in %	83	80	78	75	73	71	69	66	64			
Latent (Summer Cooling)		80	77	75	72	69	66	63	60	58			
Total (Winter Heating)		80	77	75	72	69	66	63	60	58			
Total (Summer Cooling)		82	79	77	74	71	69	67	64	62			
Pressure Drop	Pa	81	78	76	73	71	69	65	62	60			
	in. w.c	74	85	102	122	143	165	189	214	241			
		0.29	0.33	0.40	0.48	0.56	0.65	0.74	0.84	0.95			
Air Volume													
Model Number		273	409	546	682	765	955	1092	1228	1365	700	295	55
HRW-500(N)-MS 200	CMH	161	241	321	402	450	562	642	723	803	27.6	11.6	121
	CFM	416	623	831	1039	1189	1454	1662	1870	2078	800	295	63
HRW-600(N)-MS 200	CMH	245	367	489	611	700	856	978	1100	1223	31.5	11.6	139
	CFM	586	879	1172	1465	1699	2051	2345	2638	2931	850	295	68
HRW-700(N)-MS 200	CMH	345	517	690	862	1000	1207	1380	1552	1725	33.5	11.6	150
	CFM	785	1177	1569	1962	2379	2746	3139	3531	3923	950	295	77
HRW-800(N)-MS 200	CMH	462	693	924	1154	1400	1616	1847	2078	2309	37.4	11.6	170
	CFM	1011	1517	2022	2528	3059	3539	4044	4550	5055	1030	295	85
HRW-900(N)-MS 200	CMH	595	893	1190	1488	1800	2083	2380	2678	2975	40.6	11.6	187
	CFM	1265	1898	2531	3164	3738	4429	5062	5695	6327	1130	295	95
HRW-1000(N)-MS 200	CMH	745	1117	1489	1862	2200	2607	2979	3351	3724	44.5	11.6	209
	CFM	1548	2322	3096	3869	4588	5417	6191	6965	7739	1230	295	125
HRW-1100(N)-MS 200	CMH	911	1366	1822	2277	2700	3188	3643	4099	4554	48.4	11.6	276
	CFM	1820	2730	3640	4550	5438	6371	7281	8191	9101	1330	295	146
HRW-1200(N)-MS 200	CMH	1071	1607	2142	2678	3200	3749	4285	4820	5356	52.4	11.6	322
	CFM	2105	3157	4210	5262	6287	7367	8419	9472	10524	1430	295	172
HRW-1300(N)-MS 200	CMH	1239	1858	2477	3097	3700	4335	4955	5574	6193	56.3	11.6	379
	CFM	2467	3701	4934	6168	7307	8635	9869	11103	12336	1530	295	187
HRW-1400(N)-MS 200	CMH	1452	2178	2904	3630	4300	5082	5808	6534	7260	60.2	11.6	412
	CFM	2858	4286	5715	7144	8666	10002	11430	12859	14288	1630	295	199
HRW-1500(N)-MS 200	CMH	1682	2523	3363	4204	5100	5886	6727	7568	8409	64.2	11.6	439
	CFM	3239	4859	6479	8099	9686	11338	12958	14577	16197	1730	325	230
HRW-1600(N)-MS 200	CMH	1906	2860	3813	4766	5700	6672	7626	8579	9532	68.1	12.8	507
	CFM	3683	5524	7366	9207	11045	12890	14732	16573	18415	1830	325	235
HRW-1700(N)-MS 200	CMH	2167	3251	4335	5418	6500	7586	8670	9753	10837	72.0	12.8	518
	CFM	4154	6232	8309	10386	12574	14540	16617	18695	20772	1930	325	263
HRW-1800(N)-MS 200	CMH	2445	3667	4890	6112	7400	8557	9779	11002	12224	76.0	12.8	580
	CFM	4654	6981	9307	11634	13934	16288	18615	20942	23269	2030	325	282
HRW-1900(N)-MS 200	CMH	2739	4108	5477	6847	8200	9585	10955	12324	13694	79.9	12.8	622
	CFM	5181	7771	10362	12952	15633	18133	20724	23314	25905	2130	325	322
HRW-2000(N)-MS 200	CMH	3049	4574	6098	7623	9200	10672	12196	13721	15245	83.9	12.8	710
	CFM	5907	8860	11813	14766	18182	20673	23626	26579	29533	2201	325	375
HRW-2130(N) (2200-MS 200_MonoG)	CMH	3476	5214	6952	8690	10700	12166	13904	15642	17380	86.7	12.8	827
	CFM	6355	9532	12709	15887	19031	22241	25419	28596	31773	2400	460	616
HRW-2200(N)-MS 200 (H.M. & SEG)	CMH	3740	5610	7479	9349	11200	13089	14959	16829	18699	94.5	18.1	1358
	CFM	7608	11413	15217	19021	22940	26630	30434	34238	38042	2480	325	479
HRW-2400(N)-MS 200 (MonoG)	CMH	4478	6716	8955	11194	13500	15671	17910	20149	22388	97.6	12.8	1056
	CFM	7608	11413	15217	19021	22940	26630	30434	34238	38042	2600	460	696
HRW-2400(N)-MS 200 (H.M. & SEG)	CMH	4478	6716	8955	11194	13500	15671	17910	20149	22388	102.4	18.1	1534
	CFM	8974	13461	17948	22435	27018	31409	35896	40383	44870	2800	460	764
HRW-2600(N)-MS 200	CMH	5281	7922	10562	13203	15900	18484	21125	23765	26406	110.2	18.1	1684
	CFM	10451	15677	20902	26128	31436	36579	41805	47030	52256	3000	460	832
HRW-2800(N)-MS 200	CMH	6150	9226	12301	15376	18500	21527	24602	27677	30752	118.1	18.1	1834
	CFM	12040	18060	24080	30100	36194	42140	48160	54180	60200	3200	460	909
HRW-3000(N)-MS 200	CMH	7086	10628	14171	17714	21300	24800	28342	31885	35428	126.0	18.1	2003
	CFM	13741	20611	27481	34352	41291	48093	54963	61833	68704	3400	514	1000
HRW-3200(N)-MS 200	CMH	8086	12130	16173	20216	24300	28302	32346	36389	40432	133.9	20.2	2204
	CFM	15553	23330	31106	38883	46729	54436	62213	69989	77766	3600	514	1060
HRW-3400(N)-MS 200	CMH	9153	13730	18306	22883	27500	32036	36612	41189	45765	141.7	20.2	2336
	CFM	17477	26216	34954	43693	52506	61170	69909	78648	87386	3800	514	1154
HRW-3600(N)-MS 200	CMH	10285	15428	20571	25713	30900	35999	41141	46284	51427	149.6	20.2	2543
	CFM	19513	29270	39026	48783	58624	68296	78052	87809	97565	4000	514	1358
HRW-3800(N)-MS 200	CMH	11483	17225	22967	28709	34500	40192	45934	51676	57417	157.5	20.2	2993
	CFM	21661	32491	43321	54152	65081	75812	86643	97473	108303	4200	514	1448
HRW-4000(N)-MS 200	CMH	12747	19121	25495	31868	38300	44616	50989	57363	63737	165.4	20.2	3191
	CFM	23920	35880	47840	59800	71878	83720	95680	107640	119600	4400	514	2413
HRW-4200(N)-MS 200	CMH	14077	21115	28154	35192	42300	49269	56308	63346	70384	173.2	20.2	5318
	CFM	26291	39436	52582	65727	79014	92018	105164	118309	131455	4600	514	2550
HRW-4400(N)-MS 200	CMH	15472	23208	30944	38681	46500	54153	61889	69625	77361	181.1	20.2	5620
	CFM	28774	43161	57547	71934	86321	100708	115095	129482	143869	4800	514	2691
HRW-4600(N)-MS 200	CMH	16933	25400	33867	42333	50800	59267	67733	76200	84667	189.0	20.2	5931
	CFM	31368	47052	62736	78421	94138	109789	125473	141157	156841	5000	514	2835
HRW-4800(N)-MS 200	CMH	18460	27690	36920	46150	55400	64611	73841	83071	92301	196.9	20.2	6248
	CFM	34074	51112	68149	85186	102294	119260	136298	153335	170372	5200	514	2964
HRW-5000(N)-MS 200	CMH	20053	30079	40106	50132	60200	70185	80211	90238	100264	204.7	20.2	6533

Note: (1) Monolithic wheel up to HRW-2200 (MonoG), HRW-2200 is also available in Half Moon/Segmented construction for specific requirement. (2) 2400mm diameter and above rotor are available with removable segmented media. Half moon cassettes complete with half moon rotors for containerisation and ease of shipping are available as options. Dimensions and weight shall vary in such cases. (3) Because of our policy of continuous product improvements, specifications are subject to change without notice.



DESICCANT ROTORS INTERNATIONAL Pvt. Ltd.

DRI (INDIA)
100-101, Udyog Vihar, Phase-IV,
Gurgaon 122015, INDIA
Tel.: +91-124-4188888
Fax: +91-124-4188800
E-Mail: drimarketing@pahwa.com
Web: www.drirotors.com

DRI (KOREA)
5th Floor, Sunrungru 69 20
Yeoksamdong Gananamgu,
Seoul, Korea
Tel.: 02-414-0629
Mob: 011-8635-0851
E-mail: drikorea@hanmail.net
Web: www.drikorea.co.kr

DRI (USA)
8675 Rio Grande Blvd. NW
Los Ranchos, NM 87114, USA
Phone: +1 928 399 0962
E-mail: mgclark@driamerica.com
Website: www.driamerica.com

DRI (UAE)
P.O. Box No. 120672,
Q3-106, SAIF-Zone,
Sharjah, UAE
Tel.: +971-6-5578148
Fax: +971-6-5578149
Email: enquire@dri.ae
Website: www.drirotors.com

COUNTRY Phone
MALAYSIA +60-3-77259919
CHINA +86-21-51591555
PHILIPPINES +63-2-8078436
BRAZIL +55-41-36982222
INDONESIA +62-21-79199023
VIETNAM +84-8-39956498
CANADA +514-299-1131
NIGERIA +234-8097276772
SWITZERLAND +41-91-6830971
BANGLADESH +880-1819409100

Email
bam@bryair.com.my
info@bryair.com.cn
mail@bryair.com.ph
contato@bryair.com.br
indomark@bryair.com.my
vietmarketing@bryair.com.my
vyerarnian@driamerica.com
bryairmarketing@pahwa.com
nsmartini@pro-kon.ch
bryairbangladesh@pahwa.com

Website
www.bryair.com.my
www.bryair.com.cn
www.bryair.com.philippines
www.bryair.com.br
www.bryair.com.my/indonesia
www.driamerica.com
www.bryair.com/nigeria
www.pro-kon.ch
www.bryair.com/bangladesh

India • Malaysia • Indonesia • Vietnam • Philippines • Korea • China • Japan • USA • Canada • Bangladesh • Brazil • Switzerland • Nigeria • UA E • Saudi Arabia

©, ® & 'TM' of Desiccant Rotors International Pvt. Ltd.

www.drirotors.com