



GOOD LEADER

Industry

Good Passions , Good Innovations , Good Qualities ,
Good Services , Leading A GLorious Future...



JPIC Standard

Specification	1220x2440 mm or customized
Thickness	3 to 25 mm
Core	Eucalyptus, Combi
Grade	OVL, BB/BB, BB/CC, UTY





JPIC


PRO
PLY



Melamine Series

Melamine laminated Solid Color & Wood grain

Specification	1220x2440 mm or customized
Thickness	5 to 30mm
Substrate	Plywood,MDF,OSB,PB
Glue	E1,E0,ENF
Grade	OVL,AA/AB,BB/BB,BB/CC,UTY

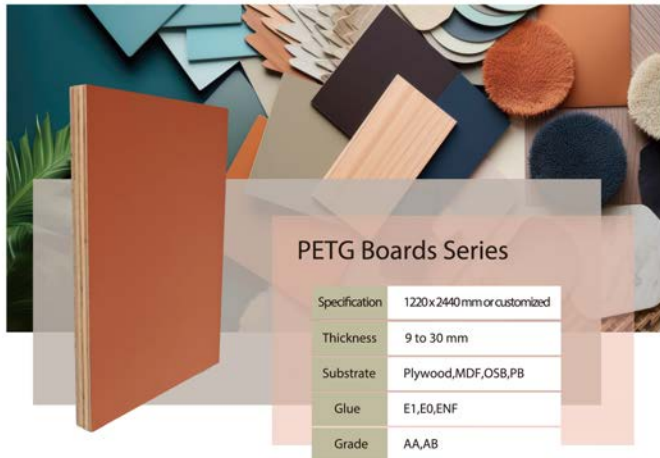

PETG Boards Series

Specification	1220x2440 mm or customized
Thickness	9 to 30 mm
Substrate	Plywood,MDF,OSB,PB
Glue	E1,E0,ENF
Grade	AA,AB





Film Faced Plywood

Specification	1220x2440 mm or customized
Thickness	9/12/15/18mm or customized
Core	Eucalyptus
Grade	A/A,B/B,C/C or customized



Eucalyptus Core Veneer



Specification	1270 x 640 mm
Thickness	1.7/2.2/3.0/3.6 mm or customized
Species	Eucalyptus
Utilization	Laminating
Moisture Content	8-16% or customized
Grade	A/B or customized





www.goodleaderwood.com