

ALEX
FASTENERS
ELAZIZY



ALEX
FASTENERS
ELAZIZY

Alex fasteners Co. (ELAZIZY)... established on 1996 our main business is to import and trade all kind of fasteners.

For biggest industrial companies and construction projects in Egypt .petroleum, petrochemical, steel fabrication, car bolts...Etc.

(Orascom, Danieli, petrojet, Hassan Allam...Etc.)

we supply fasteners with different material(8.8,10.9) finish (Black, Z.P, H.D.G) S.S(A2, A4) and supply non-standard fasteners Showroom around 600 sqm, warehouse around 4500 sqm

Head Office:

- 1- Kilo 23 Alex Cairo Desert road. On the Alex Cairo desert road (Merghem) behind Free Zone and Borg Elarab city.
- 2- 59 El Sabtia, Boulak , Cairo

Branches:

- 1- 25 Abo darda square Ellabane Alex.
- 2- 45 Abo darda St. Ellabane Alex

We import 85% from our goods from China, Taiwan, Italy, Dubai, Germany. The rest we bring it from local market.



سابقة أعمال شركتنا مع كبري شركات مصر في بعض المشروعات القومية

- مشروع المنصورة ZONE ١,٢,٣,٤
- قاعدة محمد نجيب
- العاصمة الإدارية R٠٥
- مصنع حديد المصريين - شركة دانيالي
- محطة تحلية المياه بالعاصمة الاداية
- البنية التحتية (العلميين - العاصمة الادارية)
- محطات كهرباء البرولس
- محطة الهاي سكيب
- محطة عدلي منصور
- مشروع مافيدة
- فندق الماسة بالعاصمة الادارية الجديدة
- ابراج العلميين
- مشروع ازالة الغاز - البولي ايثلين
- مشروع هايدي بارك
- جميع خطوط مترو الانفاق
- ابراج ماسبيرو
- مصنع الفوسفات
- حي الوزارات
- مصانع الرخام بمدينة الجلالة
- كباري اسكندرية - القاهرة
- مطار سفنكس
- مشروع الأكاديمية العربية
- وزارة الدفاع
- ابراج الايون
- شرق العوينات
- معرض جامبيا
- محمد بن زايد
- تركيبات الداتا سنتر
- مشروع بشتيل
- مشروع صوامع غلال
- نادي وفندق القوات المسلحة
- بالعاصمة الجديدة



ALEX
FASTENERS
ELAZIZY

شركة
أليكس فاستنرز
(العيزي)



LINKMISR
INTERNATIONAL



HASSAN ALLAM
HOLDING



CUSTOMERS

CHEMICAL & MECHANICAL TEST

Chemical Requirments

Alloy Group	Grade	Chemical Composition % (m/m)								
		C	Si	Mn	P	S	Cr	Mo	Ni	Cu
Austenitic	A2	0.1	1	2	0.05	0.03	15 to 20	a	8 to 19	4
	A4	0.08	1	2	0.045	0.03	16 to 18.5	2to 3	10 to 15	1

Mechanical Properties Requirements

Group	Grade	Property Class	Thread Diameter Range	Tensile Strength Rm(1) min N/mm	Stress at0.2% Permanent strain Rp 0.2 (1)min N/mm	Elongation afetr fracturea (2) min mm
Austenitic	A2, A4	50	<= M39	500	210	0.6 d
		70	<=M24(3)	700	450	0.4 d
		80	<=M24(3)	800	600	0.3 d

Mechanical Composition Grade 8.8

Iso Code and classes 8.8	Meechanical Properties				Chemical Composition (% of weight)									
	Yield strength N/mm min		Elongation %85 min	Resilience Nm/cm ²	C	Si	Mn	P max	S max	Cr	Mo	N1	T1	others
	S	0.2												
	-	640	12	60	0.45	0.25	0.65	0.045	0.045					



Mechanical Composition Grade 10.9

Iso Code and classes 8.8	Meechanical Properties				Chemical Composition (% of weight)									
	Yield strength N/mm min		Elongation %85 min	Resilience Nm/cm²	C	Si	Mn	P max	S max	Cr	Mo	N1	T1	others
	S	0.2												
	-	900												

Chemical Composition for ASTM A194 2H


ASTM A194 2 H	Chemical Composition (% of weight)				
	C	Si	Mn	P max	S max
	0.07	0.19	0.40	0.015	0.018

Chemical Composition for ASTM A194 B7

ASTM A194 B7	Chemical Composition (% of weight)				
	C	Si	Mn	P max	S max
	0.38 To 0.43	0.20 To 0.24	0.73 To 0.86	0.06 To 0.014	0.017 To 0.024

HEXAGON HEAD SCREWS

DIN 933

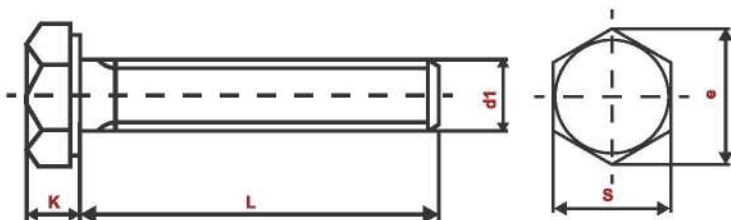

APPLICATION :

Heavy Equipment . Construction . Transportation .
Timber . Locomotive . Engine .
Alternative Energy . Mining . Manufacturing


STRENGTH GRADE	COATING FINISH
8.8	BLACK
10.9	ZINC-PLATED
12.9	HDG
STAINLESS STEEL A2-304	
STAINLESS STEEL A4-316	

THREAD SIZE	4M	5M	6M	8M	10M	12M	14M	16M	18M	20M	22M	24M	27M	30M
PITCH	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5
K	2.8	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15	17	18.7
S	7	8	10	13	17	19	22	24	27	30	32	36	41	46

(available size : 4m – 64m)

HEXAGON HEAD SCREWS

DIN 931

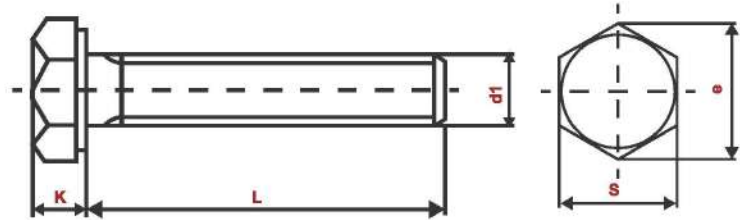

APPLICATION :

Heavy Equipment . Construction . Transportation.
Timber . Locomotive . Engine . Alternative
Energy . Mining . Manufacturing


STRENGTH GRADE	COATING FINISH
8.8 10.9 12.9 STAINLESS STEEL A2-304 STAINLESS STEEL A4-316	BLACK ZINC-PLATED HDG

THREAD SIZE	4M	5M	6M	8M	10M	12M	14M	16M	18M	20M	22M	24M	27M	30M
PITCH	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5
b	125	14	16	18	22	26	30	34	38	42	46	50	54	60
	L>200	-	22	24	28	32	36	40	44	48	52	56	60	66
	200	-	-	-	-	45	49	53	57	61	65	69	73	79
K	2.8	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15	17	18.7
S	7	8	10	13	17	19	22	24	27	30	32	36	41	46

(available size : 4m – 64m)

HIGH STRENGTH HEX BOLT

DIN 6914

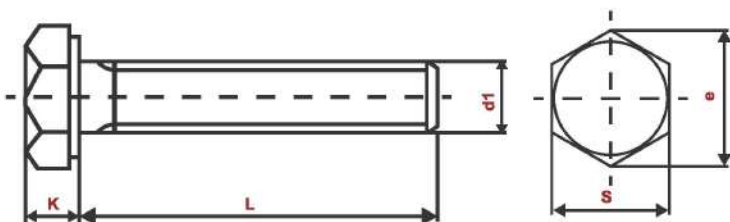

APPLICATION :

Heavy Equipment . Construction . Transportation .
Timber . Locomotive . Engine . Alternative
Energy . Mining . Manufacturing


STRENGTH GRADE	COATING FINISH
10.9	BLACK ZINC-PLATED HDG

THREAD SIZE	12M	14M	16M	18M	20M	22M	24M	27M	30M
PITCH	1.75	2	2	2.5	2.5	2.5	3	3	3.5
b	125	30	34	38	42	46	50	54	60
	L>200	36	40	44	48	52	56	60	66
	200	49	53	57	61	65	69	73	79
K	7.5	8.8	10	11.5	12.5	14	15	17	18.7
S	19	22	24	27	30	32	36	41	46

(available size : 12m – 30m)

HEX FLANGE BOLT & SCREWS

DIN 6921

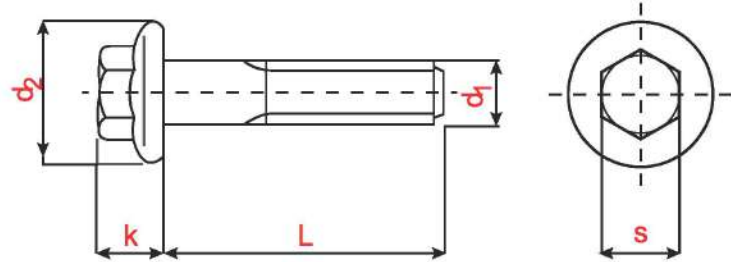

APPLICATION :

Asian Imports . Automotive . Motorcycles .
Manufacturing Equipment . Maintenance
Equipment


STRENGTH GRADE	COATING FINISH
4.6 8.8	ZINC-PLATED

THREAD SIZE	5M	6M	8M	10M	12M	14M	16M	20M
PITCH	0.8	1	1.25	1.5	1.75	2	2	2.5
K	5.4	6.6	8.1	9.2	11.5	12.8	14.4	17.1
D2	11.8	14.2	18	22.3	26.6	30.5	35	43
s	8	10	13	15	16	18	21	27

(available size : 4m – 64m)

MUSHROOM HEAD SQUARE NECK BOLTS

DIN 603

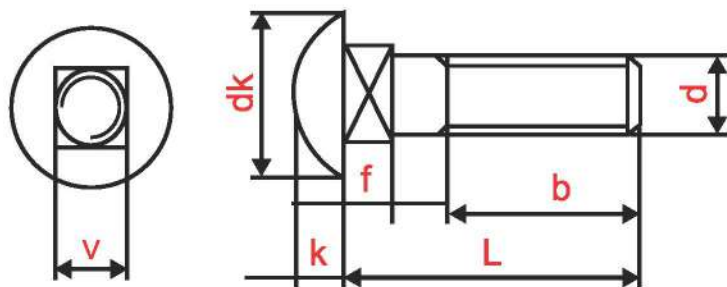


STRENGTH GRADE	COATING FINISH
4.6 8.8	ZINC-PLATED

THREAD SIZE	6M	8M	10M	12M	16M	20M
PITCH	1	1.25	1.5	1.75	2	2.5
K	3.88	4.88	5.38	6.95	8.95	11.05
F	4.6	5.6	6.6	8.75	12.9	15.9
DK	16.55	20.65	24.65	30.65	38.8	46.8
V	6.48	8.58	1.58	12.7	16.7	20.84

FLAT SOCKET HEAD CAP

DIN 7991

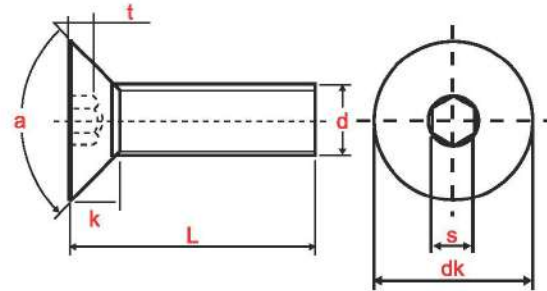

APPLICATION :

Equipment Manufacturing . Construction
Equipment . Cranes . Conveyor . Systems .
Transportation . MRO

STRENGTH GRADE

8.8
10.9
12.9

COATING FINISH


ZINC-PLATED
BLACK

THREAD SIZE	5M	6M	8M	10M	12M	14M	16M
DK	10	12	16	20	24	30	36
T	2.05	2.25	3.20	4.10	4.30	5	5.60
S	3	4	5	6	8	10	12



SOCKEAD HEAD

DIN 912

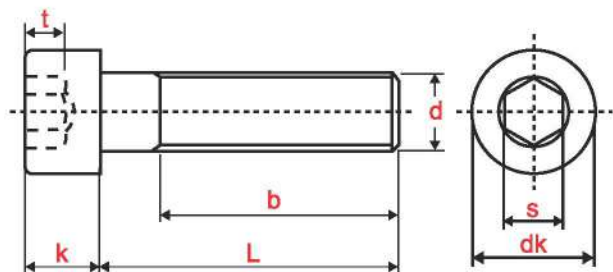

APPLICATION :

Equipment Manufacturing . Construction
Equipment . Cranes . Conveyor . Systems .
Transportation . MRO

STRENGTH GRADE	COATING FINISH
8.8 10.9 12.9	ZINC-PLATED BLACK


THREAD SIZE	5M	6M	8M	10M	12M	14M	16M	20M
PITCH	0.8	1	1.25	1.5	1.75	2	2	2.5
DK	8.28	9.78	12.73	15.73	17.73	20.67	23.67	29.67
K	4.82	5.7	7.64	9.64	11.57	13.57	15.57	19.48
S	4	5	6	8	10	12	14	17

(available size : 5m – 36m)



HEX LOW SOCKET CAP

DIN 7984

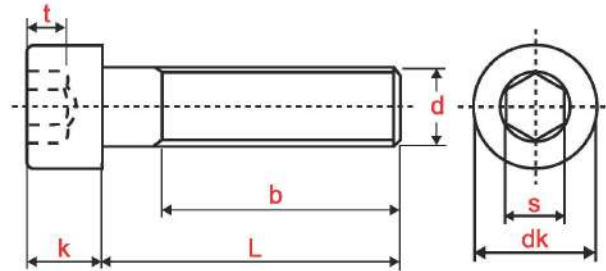

APPLICATION :


Equipment Manufacturing . Construction
Equipment . Cranes . Conveyor . Systems .
Transportation . MRO

STRENGTH GRADE	COATING FINISH
8.8 10.9 12.9	ZINC-PLATED BLACK

THREAD SIZE	5M	6M	8M	10M	12M	14M	16M	20M
PITCH	0.8	1	1.25	1.5	1.75	2	2	2.5
DK	8.28	9.78	12.73	15.73	17.73	20.67	23.67	29.67
K	3.5	4	5	6	7	8	9	11
S	4	5	6	8	10	12	14	17

SOCKET WITH FLAT POINT

DIN 913

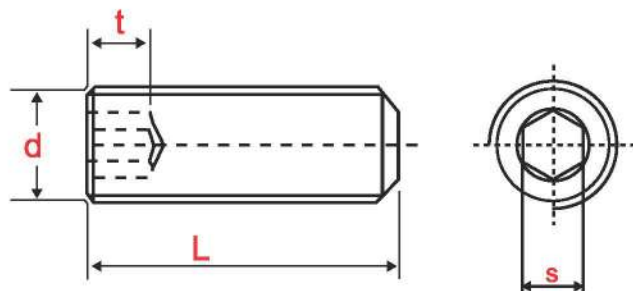

APPLICATION :


Equipment Manufacturing . Construction
Equipment. Electronics. Conveyor . Pulley
System . Trucking . Wind . MRO

STRENGTH GRADE	COATING FINISH
8.8	BLACK

THREAD SIZE	3M	4M	5M	6M	8M	10M	12M	16M	20M
T	1.2	1.5	2	2	3	4	4.8	6.4	8
S	1.5	2	2.5	3	4	5	6	8	10

EYE BOLTS

DIN 580

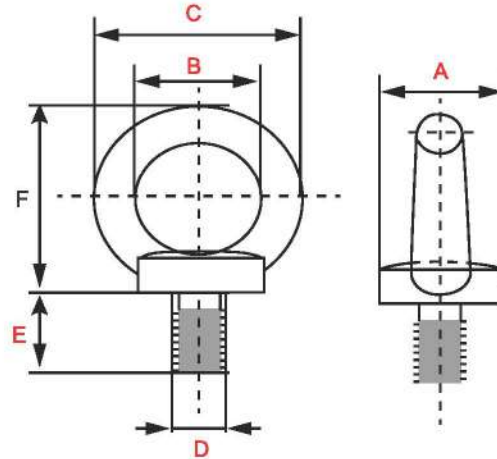

STRENGTH GRADE


8.8

COATING FINISH

ZINC-PLATED

D	8M	10M	12M	16M	20M	24M	30M
A	20	25	30	35	40	50	65
C	36	45	54	63	72	90	108
B	20	25	30	35	40	50	60
F	35	40	53	62	71	90	109

CROSS RECESSED COUNTERSUNK FLAT HEAD SCREWS

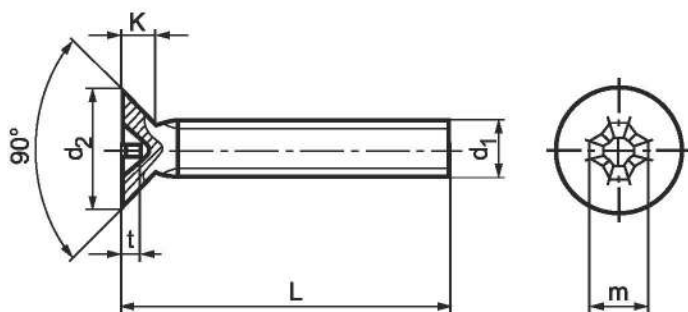

STRENGTH GRADE


4.6
STAINLESS STEEL

COATING FINISH

ZINC-PLATED
BLACK

THREAD SIZE	3M	4M	5M	6M	8M	10M
D2	5.6	7.5	9.2	11	14.5	18
K	1.65	2.2	2.5	3	4	5

SLOTTED CHEESE HEAD SCREW DIN 84

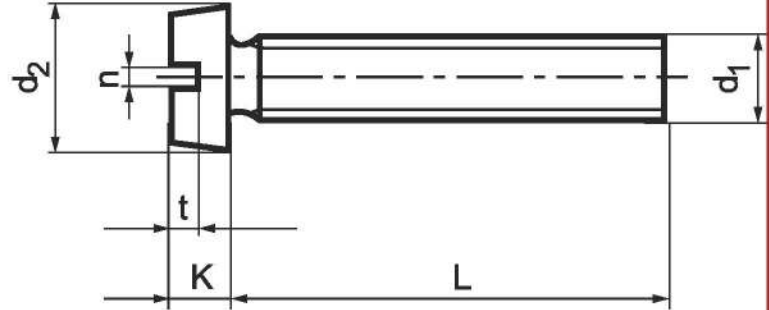

STRENGTH GRADE

4.6
STAINLESS STEEL


COATING FINISH

ZINC-PLATED

HREAD SIZE	3M	4M	5M	6M	8M	10M
DK	5.5	7	8.5	10	13	16
K	2	2.6	3.3	3.9	5	6

HEX CAP SCREW

DIN 960

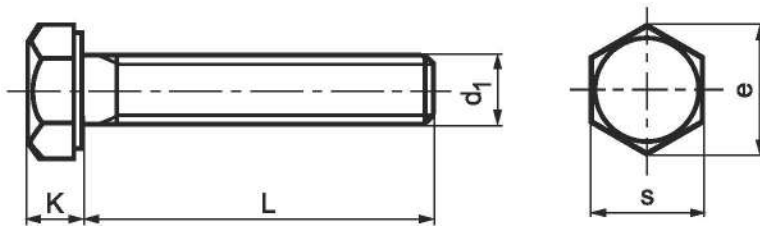

APPLICATION :

Heavy Equipment . Construction . Transportation .
Timber . Locomotive . Engine . Alternative
Energy . Mining . Manufacturing


STRENGTH GRADE	COATING FINISH
8.8	ZINC-PLATED

HREAD SIZE	8M	10M	12M	14M	16M	18M	20M
K	5.45	6.58	7.68	8.98	10.18	11.72	12.72
S	13	17	19	22	24	27	30
B	22	26	30	34	38	42	46

(B) for L < 125 MM

U- BOLT

DIN 3570

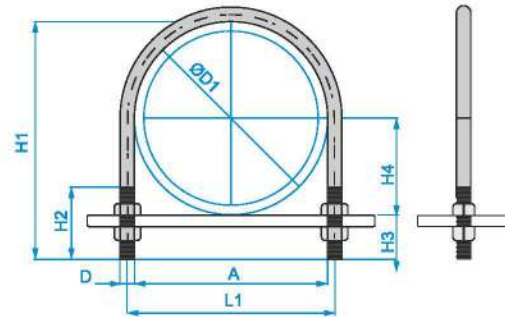

APPLICATION :

Heavy Equipment . Construction . Transportation .
Timber . Locomotive . Engine . Alternative
Energy . Mining . Manufacturing

STRENGTH GRADE

4.6
STAINLESS STEEL


COATING FINISH

ZINC-PLATED
HDG

D	10M				12M			16M				20M		
A	30	38	46	52	64	82	94	120	148	176	202	228	282	332
L 1	40	48	56	62	76	94	106	136	164	192	218	248	302	352
H 1	60	66	76	82	97	113	126	155	175	201	233	263	314	365

HEXAGON NUT

DIN 934

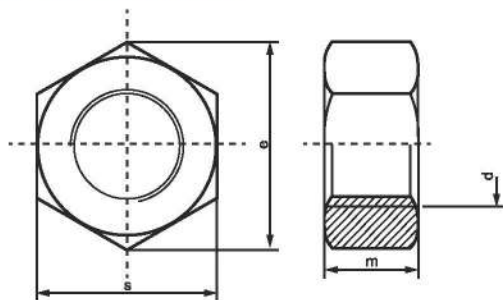

APPLICATION :

Heavy Equipment . Construction . Transportation .
Timber . Locomotive . Engine . Alternative
Energy . Mining . Manufacturing




STRENGTH GRADE	COATING FINISH
8	BLACK
10	ZINC-PLATED
STAINLESS STEEL A2-304	HDG
STAINLESS STEEL A4-316	

THREAD SIZE	4M	5M	6M	8M	10M	12M	14M	16M	18M	20M	22M	24M	27M
PITCH	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3
E	7.66	8.79	11.05	14.38	18.9	21.1	24.49	26.75	29.56	32.95	35.02	39.55	42.2
S	7	8	10	13	17	19	22	24	27	30	32	36	41

(available size : 4m – 36m)

NYLON LOCK NUT

DIN 985

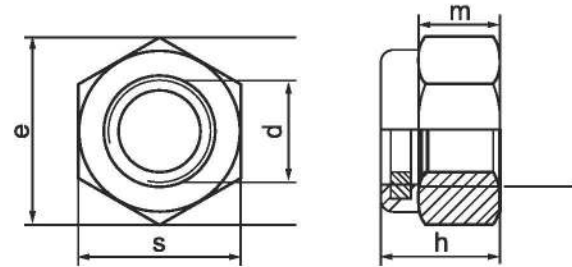

APPLICATION :

Vibration . Alternative Energy . Engines.
Bearings . Off Road . Transportation . Mining.
Heavy Equipment . Construction .

STRENGTH GRADE

8
STAINLESS STEEL A2-304
STAINLESS STEEL A4-316


COATING FINISH

ZINC-PLATED

THREAD SIZE	5M	6M	8M	12M	14M	16M	18M	20M
PITCH	0.8	1	1.25	1.75	2	2	2.5	2.5
S	8	10	13	19	22	24	27	30
H	5	6	8	12	14	16	18.5	20

HIGH STRENGTH NUT

DIN 6915

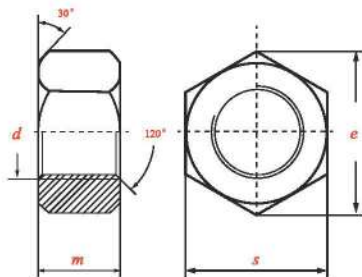

APPLICATION :




Heavy Equipment . Construction . Transportation .
Timber . Locomotive . Engine . Alternative
Energy . Mining . Manufacturing .

STRENGTH GRADE	COATING FINISH
H.V	BLACK ZINC-PLATED HDG

D	12M	16M	20M	22M	24M	27M	30M	36M
PITCH	1.75	2	2.5	2.5	3	3	3.5	4
M	10	13	15	18	19	22	24	29
S	22	27	32	36	41	46	50	60

HEX NUT

ASTMA194




STRENGTH GRADE	COATING FINISH
2.H	BLACK ZINC-PLATED HDG

NORMAL SIZE	3/8"	1/2"	3/4"	7/8"	1"	1 1/8"	1 1/4"	1 3/8"
	1 1/2"	1 5/8"	1 7/8"	2"	2 1/4"	2 1/2"	2 3/4"	3"

CAP NUT


DIN 1587



THREAD SIZE	4M	5M	6M	8M	10M	12M	16M	20M	24M
S	7	8	10	13	16	18	24	30	42
M	8	10	12	15	18	22	28	34	42
H	3.2	4	5	6.5	8	10	13	16	19

FLANGE NUT

DIN 6923

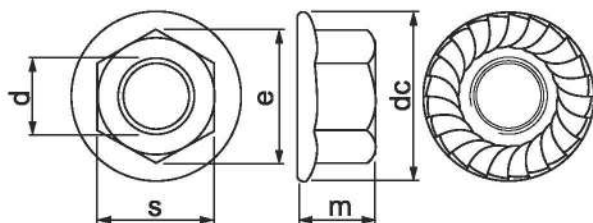


THREAD SIZE	5M	6M	8M	10M	12M	14M	16M	20M
PITCH	0.8	1	1.25	1.5	1.75	2	2	2.5
S	8	10	13	15	18	21	24	30
E	8.79	11.05	14.38	16.64	20.03	23.36	26.75	32.95
M	5	6	8	10	12	14	16	20
DC	11.8	14.2	17.9	21.8	26	29.9	34.5	42.8



WING NUT

DIN 315

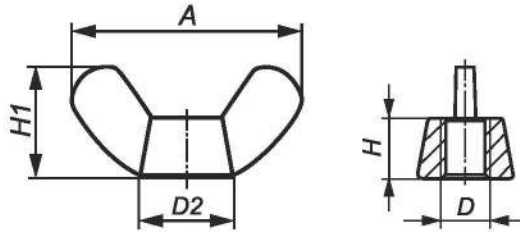


THREAD SIZE	4M	5M	6M	10M	12M	16M	20M	24M
PITCH	0.7	0.8	1	1.15	1.75	2	2.5	3
D2	6	8	10	17	20	26	32	41
A	18	24	30	48	62	70	86	106
H	3.2	4	5	8	10	13	16	20



COUPLING NUT


DIN 6330

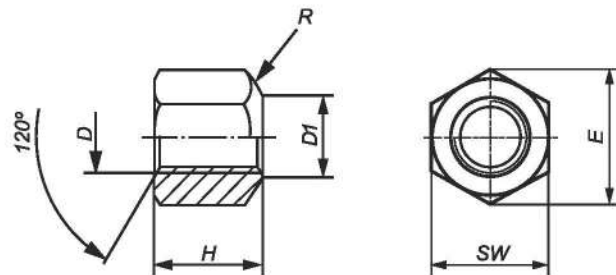

NORMAL SIZE	6M	8M	10M	12M	16M	20M	24M	30M
-------------	----	----	-----	-----	-----	-----	-----	-----

EYE NUT


DIN 582

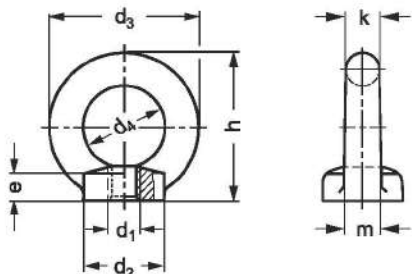

D1	8M	10M	12M	16M	20M	24M	30M	36M
D2	20	25	30	35	40	50	65	75
D3	36	45	54	63	72	90	108	126
D4	20	25	30	35	40	50	60	70
H	36	45	53	62	71	90	109	128

SQUARE NUT

DIN 557

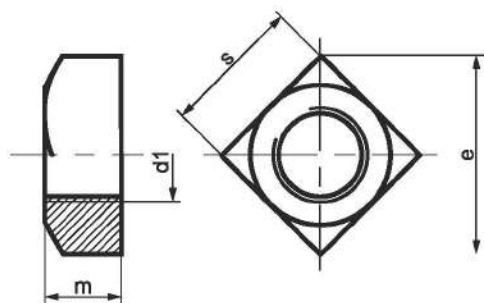


THREAD SIZE	1/4	5/16	3/8	1/2
M	5.08	6.35	7.92	11.10
S	11.3	13.34	15.24	20.83



TEE NUT

DIN 6919

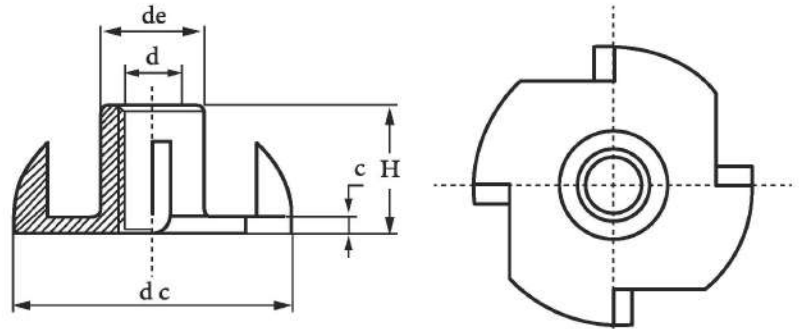

NORMAL SIZE

3M

4M


5M

6M

8M

10M

RIVET NUT

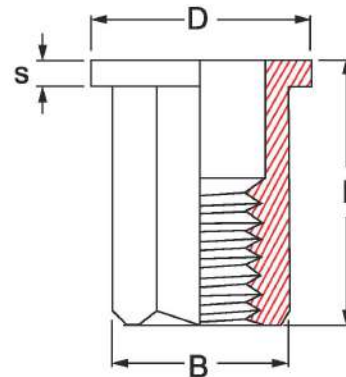

THREAD SIZE

3M

4M

5M


6M

8M

10M

WASHERS

DIN 125

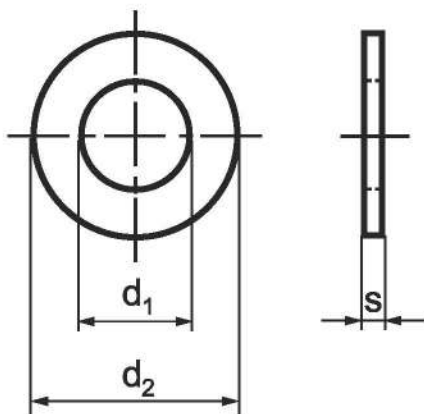


STRENGTH GRADE	COATING FINISH
	BLACK ZINC-PLATED HDG

D1	5M	6M	8M	10M	12M	14M	16M	18M	20M
----	----	----	----	-----	-----	-----	-----	-----	-----

SPRING WASHER

DIN 127

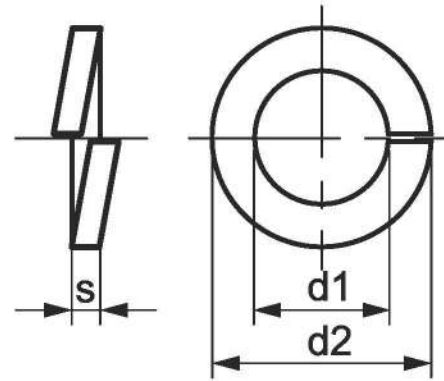


STRENGTH GRADE	COATING FINISH
	BLACK ZINC-PLATED HDG

D	5M	6M	8M	10M	12M	14M	16M
---	----	----	----	-----	-----	-----	-----

WASHER

DIN 6916

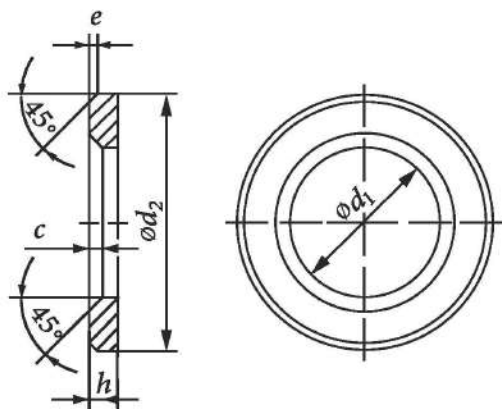


STRENGTH GRADE	COATING FINISH
	BLACK ZINC-PLATED HDG

D1	8M	10M	12M	14M	16M	18M	20M	24M	27M
----	----	-----	-----	-----	-----	-----	-----	-----	-----

WASHER

DIN 137

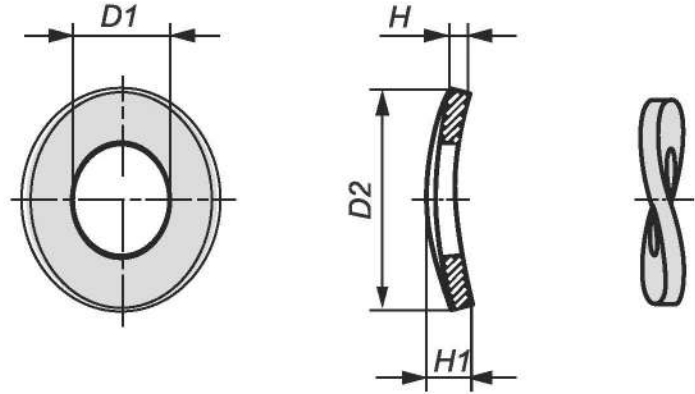


STRENGTH GRADE	COATING FINISH
	ZINC-PLATED

NORMAL SIZE	5M	6M	8M	10M	12M

EXTERNAL LOCK WASHER

DIN 6798

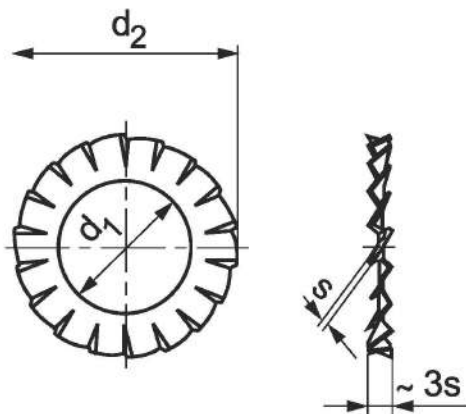


STRENGTH GRADE	COATING FINISH
	ZINC-PLATED

NORMAL SIZE	5M	6M	8M	10M	12M



STUD BOLT + THREADED RODS **ASTMA 193**


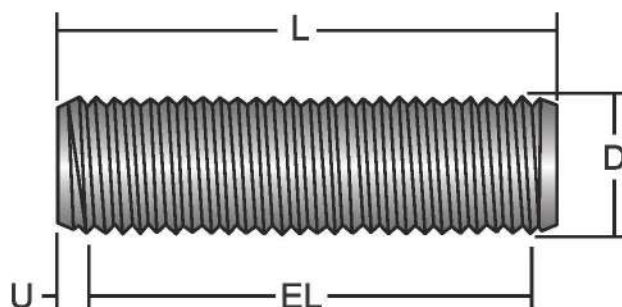


STRENGTH GRADE	COATING FINISH
B.7	BLACK ZINC-PLATED HDG

NORMAL SIZE	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1 1/8"	1 1/4"	1 3/8"
	1 1/2"	1 5/8"	1 3/4"	1 7/8"	2"	2 1/4"	2 1/2"	2 3/4"	3"

THREADED RODS

DIN 975

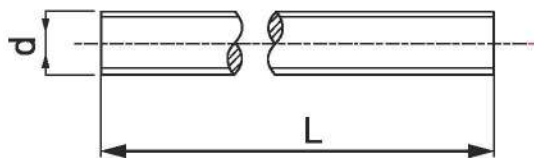

STRENGTH GRADE	COATING FINISH
4.8 10.9 STAINLESS STEEL A2-304 STAINLESS STEEL A4-316	Zinc - plated


THREAD SIZE	5M	6M	8M	10M	12M	14M	16M	18M	20M
	22M	24M	27M	30M	33M	36M	39M	42M	45M

(Strencth Grade 10.9)

Availale Length: 2000m:3000m

STUDS


DIN 939

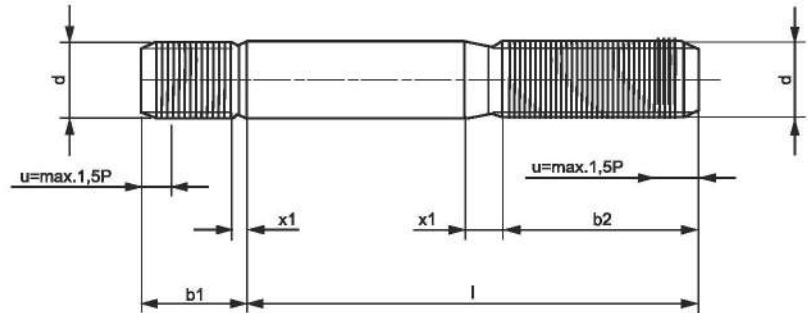

STRENGTH GRADE	COATING FINISH
4.6	BLACK ZINC-PLATED

NORMAL SIZE	5M	6M	8M	10M	12M
-------------	----	----	----	-----	-----

WEDGE ANCHOR

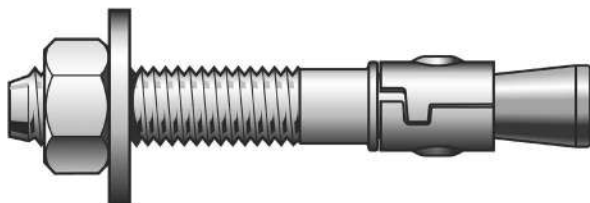


STRENGTH GRADE	COATING FINISH
4.8 STAINLESS STEEL A2-304 STAINLESS STEEL A4-316	ZINC-PLATED

NORMAL SIZE	8M	10M	12M	14M	16M	20M	24M
LENGTH (mm)	80:150	100:160	100:200	100:200	100:250	120:300	160:250




DROP IN ANCHOR

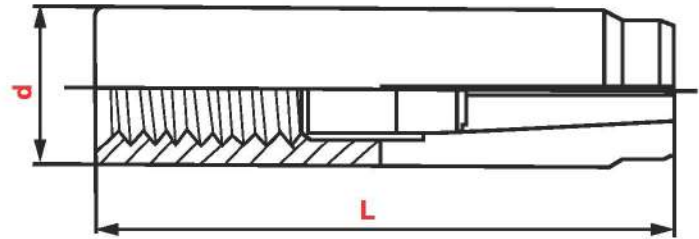

STRENGTH GRADE	COATING FINISH
	ZINC-PLATED

NORMAL SIZE	6M	8M	10M	12M	16M	20M
LENGTH (mm)	20	30	40	50	65	80

DROP IN ANCHOR

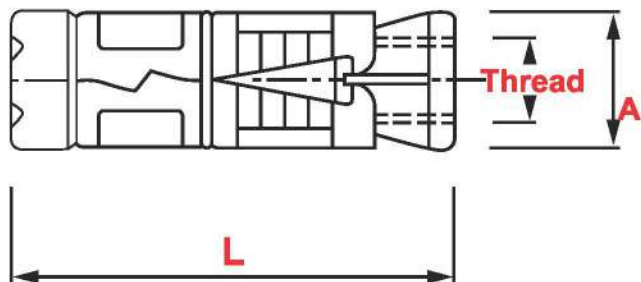


STRENGTH GRADE	COATING FINISH
4.8 STAINLESS STEEL A2-304 STAINLESS STEEL A4-316	ZINC-PLATED

NORMAL SIZE	5M	6M	8M	10M	12M
-------------	----	----	----	-----	-----



DROP IN ANCHOR

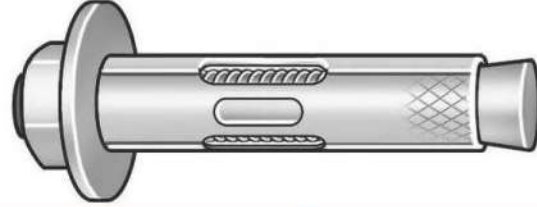


STRENGTH GRADE

COATING FINISH

ZINC-PLATED

NORMAL SIZE	6M	8M	10M	12M	16M	20M
LENGTH (mm)	20	30	40	50	65	80

NYLON ANCHOR



NORMAL SIZE

5M

6M

8M

LENGTH

50-20


80-35

135-60



SELF DRILL SCREW

DIN 7504

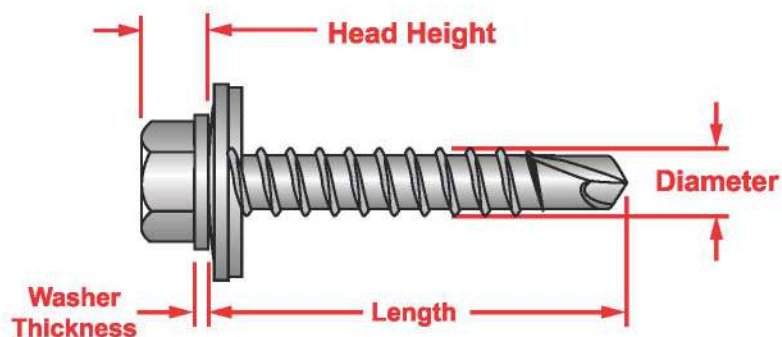


STRENGTH GRADE	COATING FINISH
4.8 STAINLESS STEEL A2-304 STAINLESS STEEL A4-316	ZINC-PLATED

NORMAL SIZE	6.3*25	6.3*38	6.3*50	6.3*63	6.3*75
	6.3*100	6.3*125	6.3*150	6.3*175	6.3*200

BLIND RIVETS

DIN 7337

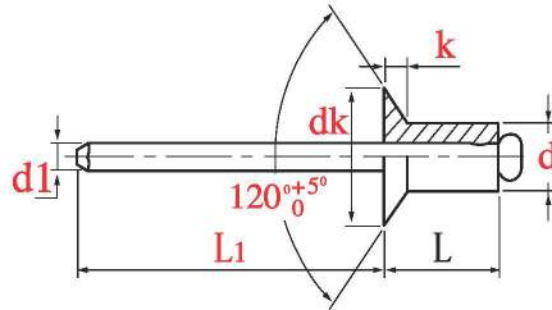

STRENGTH GRADE

COATING FINISH

ZINC-PLATED

NORMAL SIZE


3M

4M

5M


ROUND HEAD RIVETS

DIN 6791

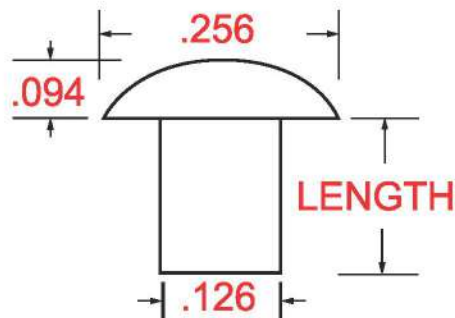

WOOD SCREW

DIN 571

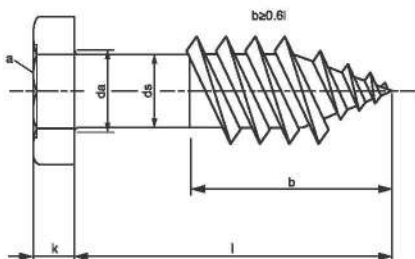

STRENGTH GRADE

4.8
STAINLESS STEEL A2-304
STAINLESS STEEL A4-316


COATING FINISH

ZINC-PLATED

THREAD SIZE	6M	8M	10M
K	3.88	5.88	7.45
D	6	8	10
S	10	13	17

TAPPING SCREWS

DIN 7981

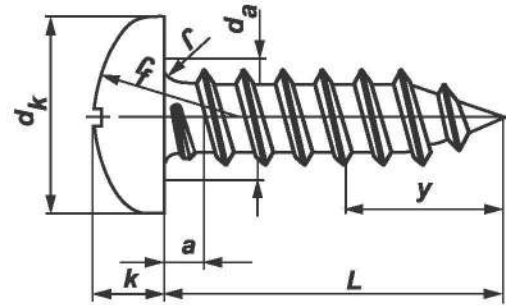

STRENGTH GRADE

4.8
STAINLESS STEEL A2-304
STAINLESS STEEL A4-316

COATING FINISH


ZINC-PLATED

THREAD SIZE	3.5M	3.9M	4.2M	4.8Mv
DK	6.9	7.5	8.2	9.5
K	2.6	2.8	3.05	3.55



SELF DRILL SCREW


DIN 7504N

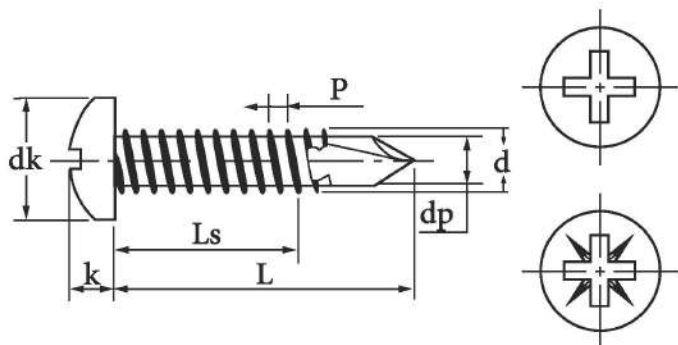

STRENGTH GRADE	COATING FINISH
4.8	ZINC-PLATED

NORMAL SIZE	4.2*13	4.2*16	4.2*20
	4.2*25	4.2*30	4.2*35

SELF DRILL SCREW WAVE

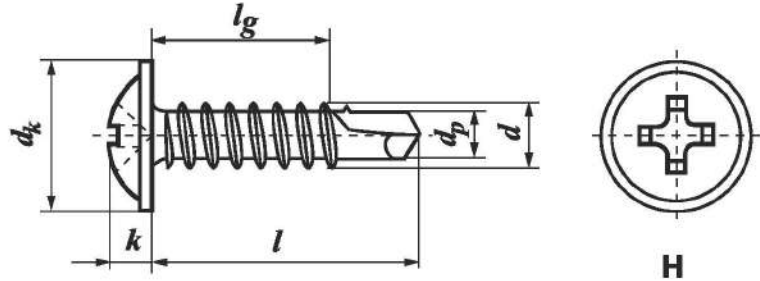


STRENGTH GRADE	COATING FINISH
4.8	ZINC-PLATED

NORMAL SIZE	4.2*13	4.2*16	4.2*20
	4.2*25	4.2*30	4.2*35

SELF DRILL SCREW

DIN 7504P

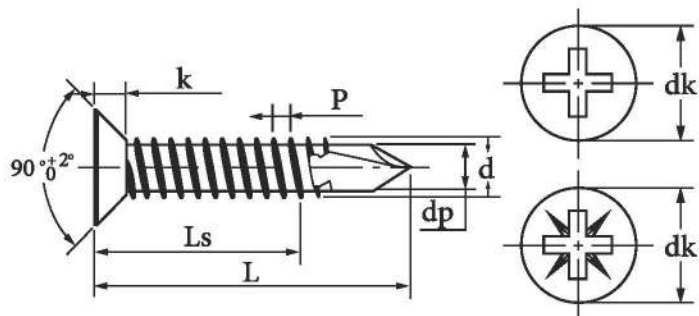


STRENGTH GRADE	COATING FINISH
4.8	ZINC-PLATED

NORMAL SIZE	3.9*13	3.9*16	3.9*20	3.9*45
	3.9*25	3.9*30	3.9*35	3.9*55



SELF DRILL SCREW

DIN 7504K

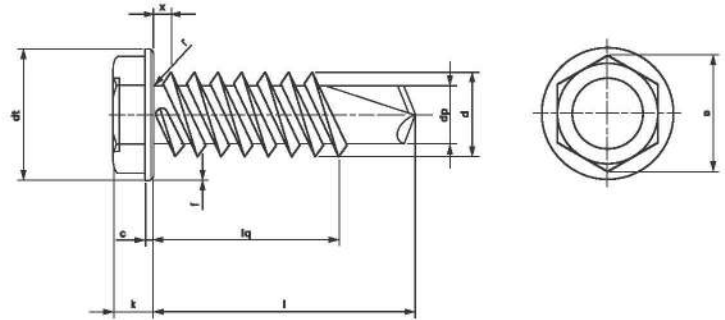

STRENGTH GRADE

4.8


COATING FINISH

ZINC-PLATED

Thread size	ST 4.2	ST 5.5	ST 6.3
K	4.1	5.4	5.9
DC	8.8	11	13.5
S	7	8	10

Retaining rings for shafts

DIN 471

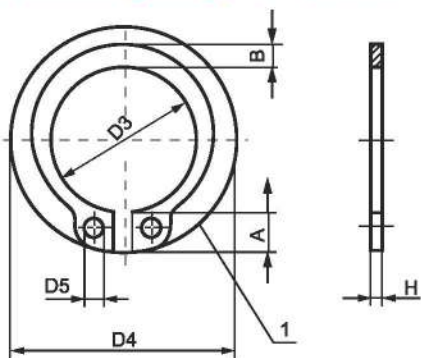

STRENGTH GRADE	COATING FINISH
	ZINC-PLATED BLACK


DESCRIPTION:

We supply different sizes of circlips

(Available Size : 3M – 300M)

Retaining rings for bores

DIN 472

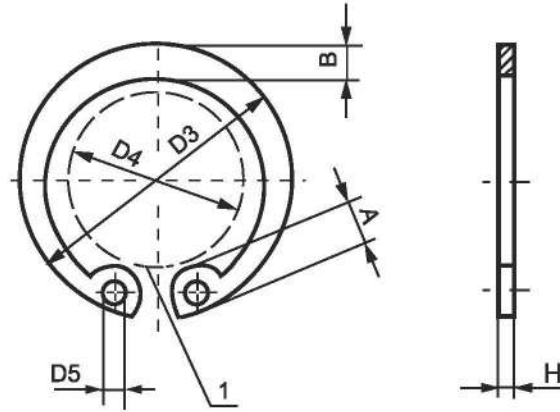

STRENGTH GRADE	COATING FINISH
	ZINC-PLATED BLACK

DESCRIPTION:

We supply different sizes of circlips

(Available Size : 8M – 300M)

FASTENER IDENTIFICATION

PH		Flat	
Slotted Robertson Combe		Pan	
Slot		Round	
Poly Drive		Truss	
Robertson		Hex Washar	
Heragon		Oval	
Hex Social		Socket Cap	
Torx		Hax	
Hex Washer Head		Button	
Slotted Hex			
Slotted Hex Washer			
PH Hex Head			

Main Branchs:

Kilo 23 Margham Alexandria Cairo Desert Road

Tel.: +2 03 4700182-114

Fax: +2 03 4700329

Mob.: +2 01025515022



59 El Sabtia, Boulak , Cairo

Tel.: +2 02 2578t9881

Fax: +2 02 25772514

Mb.: +2 01065540627



25 Abi El Dardaa Sq., El Labaan, Alexandria

Tel.: +2 03 49 77 076 Fax: +2 03 49 54 631 Mob.: 0102 8170 888

45 Abu Darda St., In Front of the Police Rest, Alexandria

Tel.: +2 03 39 20 836 - 39 12 121 Mob.: 0127 4762 626

w w w . a l e x f a s t e n e r s . c o m

